



F-2001M_J(3)(-C)

Modular Ice Machine



F-2001M_J(3)(-C)
02/11/22
Item # 13255

W x D x H
30" x 27¹/₂" x 34⁷/₁₆"

F-2001MWJ
Water-Cooled Flaker

F-2001MRJ
Remote Air-Cooled Flaker 1-Phase
Shown on optional bin B-700

F-2001MRJ3
Remote Air-Cooled Flaker 3-Phase

F-2001MRJ-C
Remote Air-Cooled Cubelet




Features

► Durable stainless steel exterior

► Advanced CleanCycle24™ design 

► Stainless steel auger with greaseless bearing

- Flaker - Up to 2098 lbs. of ice production per 24 hours
- Cubelet - Up to 1832 lbs. of ice production per 24 hours
- Mount two units, side-by-side, in only 60" of floor space for double the amount of ice production
- 2-second flush cycle every hour
- Flush cycle removes sediment for cleaner ice
- Protected by H-GUARD Plus Antimicrobial Agent 
- R-404A Refrigerant

Available on Bins:

B-250SF B-700SF B-900SF B-1300SS B-1650SS*
B-500SF B-800SF B-1150SS B-1500SS*

*Top kit may be required. See Bin Spec Sheets. *Two unit application only.*

Warranty:


3 Year Parts & Labor on entire machine. 5 Year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

| | Condenser | Model | ICE PRODUCTION | | WATER USAGE | | | ELECTRICAL | | | | Heat Rejection BTU/hr. | Refrigerant Charge Amount | Net / Ship Weight (lbs.) |
|---------|----------------|-------------|--|-----------|-------------------------------------|---------------------------------------|---------------------------------|--|----------|---------------|----------------------------------|------------------------|--|--------------------------|
| | | | Air / Water Temp Lbs. per 24 hours 70°/ 50°F | 90°/ 70°F | Potable Gal. per 100 lbs. 90°/ 70°F | Condenser Gal. per 100 lbs. 90°/ 70°F | kWh Used per 100 lbs. 90°/ 70°F | Max. Fuse Size or HACR Circuit Breaker | Amperage | Voltage | Circuit Wires (including ground) | | | |
| 1 Phase | Water Flaker | F-2001MWJ | 2043 | 1840 | 12.0 | 109 | 3.19 | 30A | 16.4A | 208-230V/60/1 | 4 | 19,500 | 2 lbs. 0.1 oz. | 310 / 342 |
| | Remote Flaker | F-2001MRJ | 2073 | 1660 | 12.0 | N/A | 3.81 | 30A | 19.9A | 208-230V/60/1 | 4 | 16,500 | 8 lbs. 2.5 oz. (15 lbs. 14 oz.) [†] | 326 / 360 |
| | Remote Cubelet | F-2001MRJ-C | 1832 | 1500 | 12.0 | N/A | 4.35 | 30A | 19.9A | 208-230V/60/1 | 4 | 20,300 | 8 lbs. 2.5 oz. (15 lbs. 14 oz.) [†] | 326 / 360 |
| 3 Phase | Remote Flaker | F-2001MRJ3 | 2098 | 1675 | 12.0 | N/A | 3.90 | 20A | 18.1A | 208-230V/60/3 | 4 | 19,500 | 8 lbs. 2.5 oz. (15 lbs. 14 oz.) [†] | 326 / 360 |

[†] (with condenser)


Power cord not included. Must be hard-wired at site.

Cube Dimensions* Flaked F-2001M_J



* approximate size in inches, image not to scale

Cubelet F-2001MRJ-C



Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 187-253V

Service

- Panels easily removed and all components accessible for service.
- Allow 6" (15 cm) clearance at rear and sides for proper air circulation and ease of maintenance/service. Allow 24" (61 cm) clearance at top for removal of auger.

Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent
- Water-Cooled Model (Lines Must Be Independent of Icemaker)
- Condenser Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Condenser Drain/Return Line: Minimum 1/4" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent

Hoshizaki reserves the right to change specifications without notice.




F-2001M_J(3)(-C)

Modular Ice Machine




F-2001M_J(3)(-C)
02/11/22
Item # 13255

FRONT VIEW

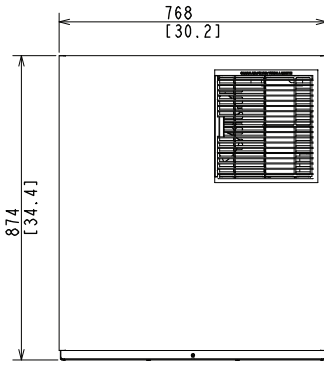


WATER-COOLED

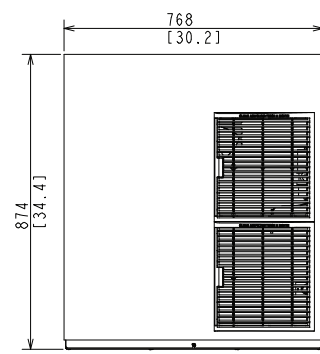


REMOTE AIR-COOLED

mm
[inch]

SIDE VIEW

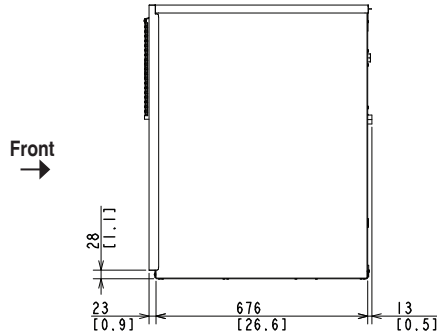


WATER-COOLED

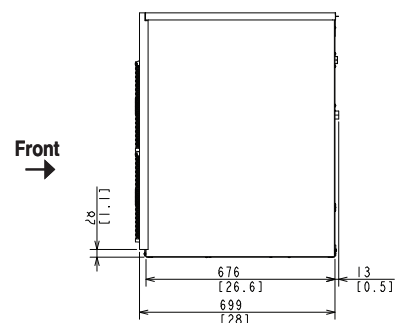


REMOTE AIR-COOLED

REAR VIEW

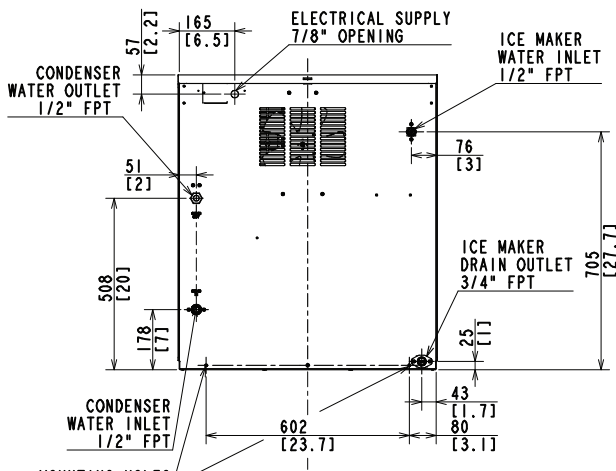


WATER-COOLED

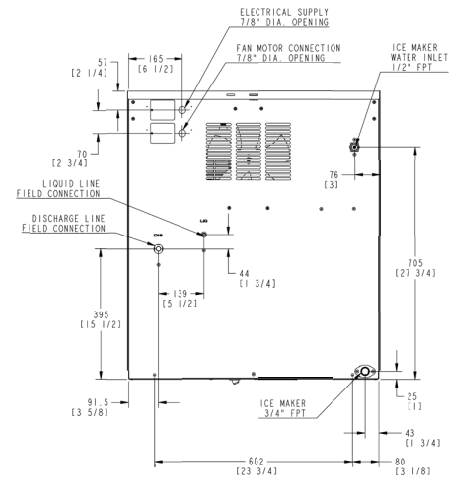


REMOTE AIR-COOLED

BOTTOM VIEW

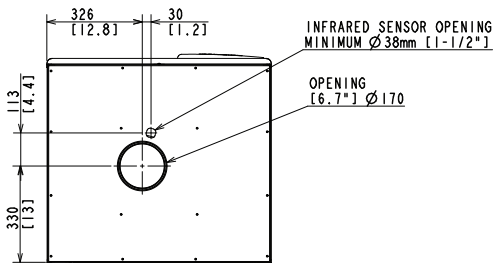

WATER-COOLED

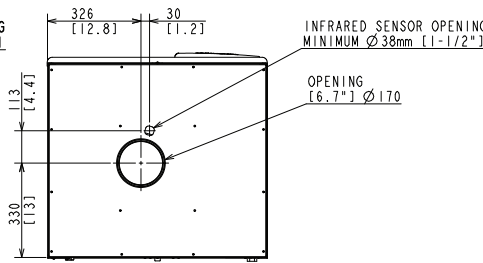

REMOTE AIR-COOLED

URC-22F Remote Condenser (Sold Separately)
(W x D x H) 46^{3/8} x 14^{1/16} x 40^{1/2}
For Use with F-2001MRJ(3)(-C)



Pre-Charged Tubing Kits
(Sold Separately)
20' R404-20610
35' R404-35610
55' R404-55610

Voltage supply for the URC Remote Condenser is supplied from the Ice Maker. No additional circuit is required.

