



# HOSHIZAKI

PRODUCT / SALES CATALOG

ICE MACHINES

DISPENSERS

STORAGE BINS

DISPLAY CASES

REACH-INS

**“A Superior Degree of Reliability”**

[www.hoshizakiamerica.com](http://www.hoshizakiamerica.com)

Item #40067 | 01/26/2015





## CORPORATE MISSION

**Hoshizaki America's** corporate mission is to achieve and maintain optimum customer satisfaction, by consistently providing the highest level of quality in the products and services delivered to all customers throughout the western hemisphere; to perpetuate a healthy, viable organization; and to deserve the reputation as an innovative leader from a technological and people standpoint in the commercial kitchen equipment industry.

In order to create a more environmentally friendly society, both Corporations and individuals must work together for an Eco-Friendly world. Our Ecology plan is based on ISO-14001 which stipulates development of Energy Saving products, as well as, Conservation and Preservation practices. Hoshizaki Japan is ISO-14001 certified.



## CORPORATE LOCATIONS

**Hoshizaki America, Inc.** with corporate headquarters in Peachtree City, Georgia, and a second manufacturing facility in Griffin, Georgia, operates some of the most automated production facilities in the industry. Using state-of-the-art technology, every Hoshizaki ice machine is run-tested at the factory, and undergoes rigorous quality performance tests including ice production capacity and energy efficiency. Hoshizaki America offers advanced seminars at our headquarters and basic training programs which are scheduled across the country for both service representatives and customers.



**Peachtree City Facility**



**Griffin Facility**

## DID YOU KNOW?

- **Hoshizaki** is the world's largest manufacturer of commercial ice equipment, employing over 10,000 people.
- **Hoshizaki** is the world's largest manufacturer of commercial refrigerated food service equipment with sales of over \$2 billion serving customers in 75 nations.
- **Hoshizaki** operates plants worldwide including two in the USA, three in Japan, one in England, China, Australia and Mexico.
- **Hoshizaki** operates sales offices worldwide with distribution throughout 75 nations.
- 47 of the top 50 U.S. foodservice chains specify and use **Hoshizaki** products.
- In expansion to a fullservice kitchen equipment company, **Hoshizaki** acquired Lancer Corporation in 2006 and GRAM Commercial A/S in 2008.
- In 2012, **Hoshizaki** was voted the "Best In Class" by Operators
- **Hoshizaki** is certified in both ISO-9001 and ISO-14001 - being the first and only foodservice equipment manufacturer to achieve ISO-14001.






## TYPES OF ICE


**Crescent Cube** - Individual, hard, clear, crescent shape

**Models** - KM, KMD, KML, KMS, KMH, DKM models

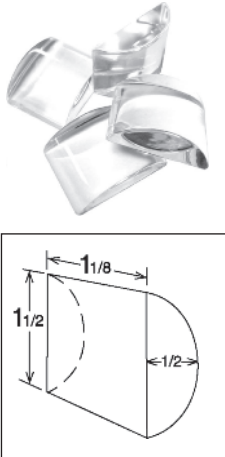


**“Top Hat” Cube** - Individual, hard, clear, round shape

**Models** - AM models

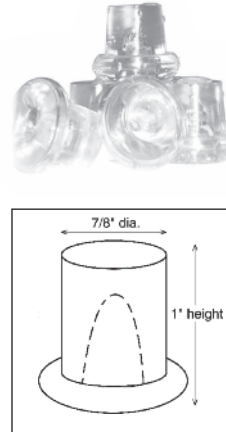


**Square Cube** - Individual, hard, clear, square shape

**Models** - IM models

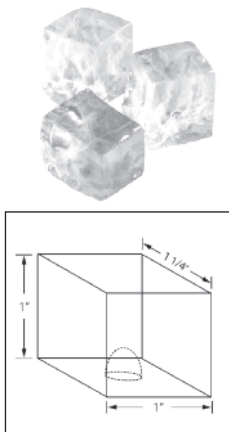


**Flaked** - Soft, light, chewable, various shapes

**Models** - F models

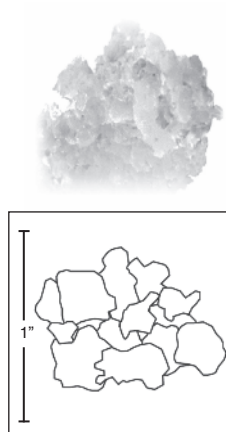


**Cubelet** - Chewable, soft, light, small pellet shape

**Models** - C, F-C, FD-C, FS-C, DCM models

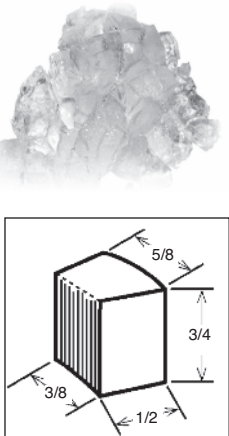

## CUBELET SIZES

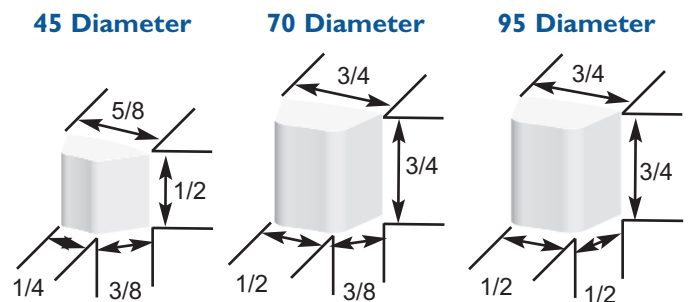


# CUBER SERIES



## Features & Benefits of the AM Cuber



AM Evaporator




AM Cube Dimensions

- Attractive stainless steel finish
- Individual top-hat style cubes eliminates clumping and allow for easy filling of glass
- The **AM Series Cubers** were designed with fewer moving parts, which contribute to its longer life and dependability
- The compact size (less than 34 inches!), undercounter design, swing style reversible door, and UL approval for outdoor use of the AM-50BAE expand the possibilities where this machine can be installed
- Front in and front out airflow allows unit to be built into cabinetry without additional ventilation
- The ice making compartment can be easily disassembled for cleaning
- -DS - door system is designed to accommodate custom cabinetry
- ADA Compliant




## Features & Benefits of the KM Cuber



KM Cube Dimensions




- The **KM Cuber Series** features an attractive stainless steel finish with the simplest icemaking system in the industry
- The exclusive dual-sided stainless steel evaporator has oval-shaped copper refrigerant tubing for the most efficient heat exchange
- Hoshizaki's evaporator design freezes the purest water, washing most of the minerals and impurities down the drain; resulting in individual crystal clear crescent cubes
- Not affected by caustic water, therefore no plating to peel or flake and no plastic to crack
- Fewer moving parts and cycles means dependability, longer machine life and energy savings
- Features the CycleSaver™ design - allows production of the same amount of ice in half the cycles of other ice machines
- Houses the EverCheck™ control board - sounds an audible warning when service is needed
- Contains *H-GUARD Plus* Antimicrobial Agent

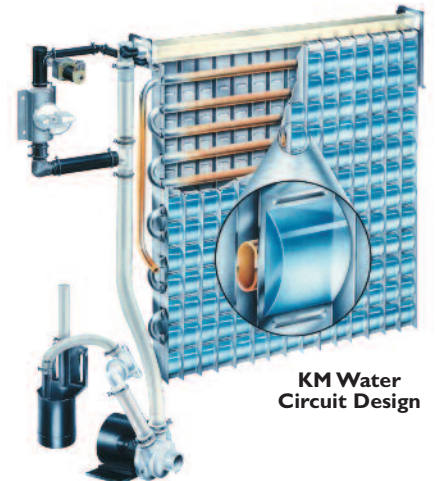

KM Water Circuit Design

### Compartmentalized Design

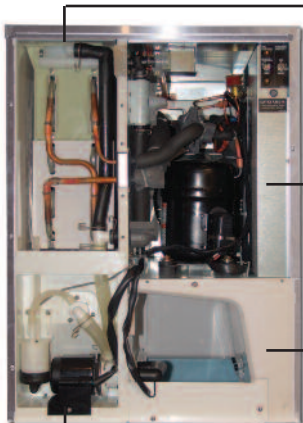

Sealed, Insulated Evaporator Compartment

Dry Electrical and Compressor Compartment

Insulated Ice Drop Compartment

Dry Pump Compartment

### CUBER ICE USAGE GUIDE

Establishment	Approximate Daily Usage
Restaurant	1.5 lbs. ice per seat
Cocktail Lounge	3.0 lbs. ice per seat
Lodging	
Food Service	1.5 lbs. ice per seat
Banquet Service	1.0 lbs. ice per seat
Guest Ice	5.0 lbs. ice per room
Beverage Service	5.0 oz. ice per 7 - 10 oz. cup
Convenience Store	8.0 oz. ice per 12 - 16 oz. cup
Fast Food	10.0 oz. ice per 20 - 32 oz. cup
Salad Bar/Seafood Display	30 lbs. ice per cubic feet



# CUBER SERIES


## SELF-CONTAINED CUBERS with Built-In Bins

AM-50BAE SERIES | 14 7/8" W X 22 5/8" D X 33 1/2" H

Under Counter Unit



**Self-Contained Bin Storage Capacity**  
Up to 27 Lbs.



**UL** approved for outdoor use



-DS shown with Custom Cabinetry



14 7/8 x 22 5/8 x 33 1/2  
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
AM-50BAE	Air-Cooled	55	115V/60/1	9.9	53.7	N/A	115 Lbs.
AM-50BAE-DS†	Air-Cooled	55	115V/60/1	9.9	53.7	N/A	115 Lbs.
AM-50BAE-AD*	Air-Cooled	55	115V/60/1	9.9	53.7	N/A	115 Lbs.
AM-50BAE-ADDS*†	Air-Cooled	55	115V/60/1	9.9	53.7	N/A	115 Lbs.

\*The ADA compliant machine dimensions are 14 7/8" width x 22 5/8" depth x 31 1/2" height

†Designed to accommodate custom cabinetry


Rated @ 70° Air / 50° Water

KM-61BAH | 17 3/4" W X 24" D X 39" H (\*6" Legs Included)

Under Counter Unit



**Self-Contained Bin Storage Capacity**  
Up to 38 Lbs.



**ETL** **NSE**



17 3/4 x 24 x 39\*  
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-61BAH *	Air-Cooled	50	115V/60/1	10.6	20.6	N/A	117 Lbs.

\*The KM-61BAH is ENERGY STAR qualified.


Rated @ 90° Air / 70° Water

KM-101BAH | 23 3/4" W X 24" D X 39" H (\*6" Legs Included)

Under Counter Unit



**Self-Contained Bin Storage Capacity**  
Up to 53 Lbs.



**AIR-CHILLED** **ETL** **NSE**

Rated in accordance with ARI Standard 810-95



23 3/4 x 24 x 39\*  
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-101BAH *	Air-Cooled	88	115V/60/1	9.4	23.0	N/A	136 Lbs.

\*The KM-101BAH is ENERGY STAR qualified.

Rated @ 90° Air / 70° Water

# CUBER SERIES




## SELF-CONTAINED CUBER with Built-In Bins

**KM-151BAH | 23 3/4" W X 28" D X 39" H (\*6" Legs Included) Under Counter Unit**



**Self-Contained Bin Storage Capacity**  
Up to 78 Lbs.



23 3/4 x 28 x 39\*  
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>KM-151BAH*</b>	Air-Cooled	121	115V/60/1	8.4	17.8	N/A	150 Lbs.
<b>KM-151BWH</b>	Water-Cooled	130	115V/60/1	7.3	25.0	140	154 Lbs.


\*The KM-151BAH is ENERGY STAR qualified.

Rated @ 90° Air / 70° Water

**KM-201B\_H | 24" W X 28" D X 39" H (\*6" Legs Included) Under Counter Unit**



**Self-Contained Bin Storage Capacity**  
Up to 80 Lbs.



24 x 28 x 39\*  
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>KM-201BAH*</b>	Air-Cooled	165	115V/60/1	7.5	22.0	N/A	165 Lbs.
<b>KM-201BWH*</b>	Water-Cooled	181	115V/60/1	6.2	24.0	141.3	165 Lbs.

\*The KM-201BAH is ENERGY STAR qualified.



Rated @ 90° Air / 70° Water

\*KM-201B - Ice bin opening is ADA compliant

**KM-260B\_H | 30" W X 28" D X 39" H (\*6" Legs Included) Under Counter Unit**



**Self-Contained Bin Storage Capacity**  
Up to 100 Lbs.



30 x 28 x 39\*  
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>KM-260BAH*</b>	Air-Cooled	200	115V/60/1	7.6	20.3	N/A	187 Lbs.
<b>KM-260BWH*</b>	Water-Cooled	237	115V/60/1	6.4	26.3	121	187 Lbs.

\*The KM-260BAH is ENERGY STAR qualified.

Rated @ 90° Air / 70° Water


\*KM-260B - Ice bin opening is ADA compliant



# CUBER SERIES

## KM CRESCENT CUBERS

**KML-250M SERIES | 30"W X 27 3/8"D X 22"H (ice machine dimensions only)**



Rated in accordance with ARI Standard 810-95



30	32 1/2	55 3/8
Wide	Deep	High



30	32 1/2	68
Wide	Deep	High





30	30	75
Wide	Deep	High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KML-250MAH	Air-Cooled	238	115V/60/1	8.2	35.2	N/A	185 Lbs.
KML-250MWH	Water-Cooled	284	115V/60/1	6.23	43.7	123	185 Lbs.

Rated @ 90° Air / 70° Water


**KM-320M SERIES | 22"W X 27 3/8"D X 30 5/16"H (ice machine dimensions only)**




Rated in accordance with ARI Standard 810-95




22	32 1/2	76 5/16
Wide	Deep	High




30	32 1/2	76 5/16
Wide	Deep	High



44	32 1/2	76 5/16
Wide	Deep	High



48	32 1/2	76 5/16
Wide	Deep	High




52	32 1/2	76 5/16
Wide	Deep	High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-320MAH	Air-Cooled	246	115V/60/1	7.5	31.2	N/A	153 Lbs.
KM-320MWH	Water-Cooled	318	115V/60/1	5.2	21.9	121	153 Lbs.

Rated @ 90° Air / 70° Water


**KML-351M SERIES | 30"W X 27 3/8"D X 22"H (ice machine dimensions only)**



Rated in accordance with ARI Standard 810-95



30	32 1/2	55 3/8
Wide	Deep	High



30	32 1/2	68
Wide	Deep	High



30	30	75
Wide	Deep	High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KML-351MAH	Air-Cooled	282	115V/60/1	6.4	20.3	N/A	185 Lbs.
KML-351MWH	Water-Cooled	307	115V/60/1	5.41	20.5	143	185 Lbs.


Rated @ 90° Air / 70° Water

# CUBER SERIES



## KM CRESCENT CUBERS


**KMD-410M SERIES | 22"W X 24"D X 24"H (ice machine dimensions only)**



Rated in accordance with ARI Standard 810-95



22	x	30 1/2	x	35 3/8
Wide		Deep		High



30	x	32 1/2	x	68 1/8
Wide		Deep		High


Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>KMD-410MAH</b>	Air-Cooled	324	115-120V/60/1*	5.8	22.6	N/A	161 Lbs.
<b>KMD-410MWH</b>	Water-Cooled	382	115-120V/60/1*	4.3	23.2	145	163 Lbs.

\*3 wire with neutral for 115V

Rated @ 90° Air / 70° Water


**KMD-450M and KMD-460 SERIES | 30"W X 24 1/4"D X 22 1/8"H (ice machine dimensions only)**



Rated in accordance with ARI Standard 810-95



22	x	30 1/2	x	34
Wide		Deep		High



30	x	32 1/2	x	68 1/8
Wide		Deep		High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>KMD-450MWH</b>	Water-Cooled	415	115-120V/60/1*	4.6	17.8	126	170 Lbs.

\*3 wire with neutral for 115V

Rated @ 90° Air / 70° Water


Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>KMD-460MAH *</b>	Air-Cooled	387	115-120V/60/1*	5.5	18.9	N/A	170 Lbs.

\*The KMD-460MAH is ENERGY STAR qualified.

\*3 wire with neutral for 115V

Rated @ 90° Air / 70° Water


**KML-451M SERIES | 30"W X 27 3/8"D X 22"H (ice machine dimensions only)**



Rated in accordance with ARI Standard 810-95



30	x	32 1/2	x	55 3/8
Wide		Deep		High



30	x	32 1/2	x	68
Wide		Deep		High



30	x	30	x	75
Wide		Deep		High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>KML-451MAH *</b>	Air-Cooled	349	115V/60/1	6.7	18.3	N/A	185 Lbs.
<b>KML-451MWH</b>	Water-Cooled	415	115V/60/1	5.3	19.7	138	185 Lbs.

\*The KML-451MAH is ENERGY STAR qualified.

Rated @ 90° Air / 70° Water







# CUBER SERIES

## KM CRESCENT CUBERS


**KM-515M SERIES | 22"W X 27 3/8"D X 30 5/16"H (ice machine dimensions only)**




Rated in accordance with ARI Standard 810-95



22	x	32 1/2	x	76 5/16
Wide		Deep		High




30	x	32 1/2	x	76 5/16
Wide		Deep		High



44	x	32 1/2	x	76 5/16
Wide		Deep		High



48	x	32 1/2	x	76 5/16
Wide		Deep		High



52	x	32 1/2	x	76 5/16
Wide		Deep		High



Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>KM-515MAH(-P)*</b>	Air-Cooled	450	115V/60/1	5.91	18.5	N/A	175 Lbs.
<b>KM-515MWH(-P)</b>	Water-Cooled	446	115V/60/1	5.14	23.0	106	175 Lbs.
<b>KM-515MRH</b>	Remote A-C	452	115V/60/1	5.8	20.8	N/A	175 Lbs.


\*The KM-515MAH and KM-515MAH-P are ENERGY STAR qualified.  
(-P) Exterior fasteners are tamper proof torx pin screws

Rated @ 90° Air / 70° Water


**KM-600MAH (115V) | 22"W X 27 3/8"D X 37 5/16"H (ice machine dimensions only)**




Rated in accordance with ARI Standard 810-95




22	x	32 1/2	x	83 5/16
Wide		Deep		High




30	x	32 1/2	x	83 5/16
Wide		Deep		High



44	x	32 1/2	x	83 5/16
Wide		Deep		High



48	x	32 1/2	x	83 5/16
Wide		Deep		High



52	x	32 1/2	x	83 5/16
Wide		Deep		High


Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>KM-600MAH*</b>	Air-Cooled	503	115-120V/60/1	5.7	19.7	N/A	200 Lbs.

\*The KM-600MAH is ENERGY STAR qualified.

Rated @ 90° Air / 70° Water


**KML-631M SERIES | 30"W X 27 3/8"D X 26"H (ice machine dimensions only)**



Rated in accordance with ARI Standard 810-95



30	x	32 1/2	x	59 3/8
Wide		Deep		High



30	x	32 1/2	x	72
Wide		Deep		High



30	x	30	x	79
Wide		Deep		High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>KML-631MAH</b>	Air-Cooled	497	208-230V/60/1*	6.2	26.0	N/A	220 Lbs.
<b>KML-631MWH</b>	Water-Cooled	630	208-230V/60/1*	4.4	24.8	119	217 Lbs.
<b>KML-631MRH</b>	Remote A-C	589	208-230V/60/1*	5.3	24.0	N/A	220 Lbs.

\*3 wire with neutral for 115V


Rated @ 90° Air / 70° Water

# CUBER SERIES



## KM CRESCENT CUBERS


### KM-650M SERIES | 22"W X 27 3/8"D X 37 5/16"H (ice machine dimensions only)




Rated in accordance with ARI Standard 810-95




22	x	32 1/2	x	83 5/16
Wide		Deep		High




30	x	32 1/2	x	83 5/16
Wide		Deep		High



44	x	32 1/2	x	83 5/16
Wide		Deep		High



48	x	32 1/2	x	83 5/16
Wide		Deep		High



52	x	32 1/2	x	83 5/16
Wide		Deep		High


Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>KM-650MAH *</b>	Air-Cooled	562	208-230V/60/1	5.51	18.0	N/A	200 Lbs.
<b>KM-650MWH</b>	Water-Cooled	654	208-230V/60/1	4.16	22.4	153	200 Lbs.
<b>KM-650MRH</b>	Remote A-C	564	208-230V/60/1	5.6	16.5	N/A	200 Lbs.

\*The KM-650MAH is ENERGY STAR qualified.

Rated @ 90° Air / 70° Water

### KMD-850M SERIES | 30"W X 24 5/8"D X 28"H (ice machine dimensions only)



Rated in accordance with ARI Standard 810-95



30	x	30 1/2	x	39 5/8
Wide		Deep		High




48	x	32 1/2	x	74
Wide		Deep		High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>KMD-850MAH</b>	Air-Cooled	625	208-230V/60/1	6.2	34.0	N/A	249 Lbs.
<b>KMD-850MWH</b>	Water-Cooled	732	208-230V/60/1	4.7	31.0	182	249 Lbs.
<b>KMD-850MRH</b>	Remote A-C	680	208-230V/60/1	5.8	28.0	N/A	235 Lbs.

Rated @ 90° Air / 70° Water


### KM-901M SERIES | 30"W X 27 3/8"D X 37 7/16"H (ice machine dimensions only)




Rated in accordance with ARI Standard 810-95




30	x	32 1/2	x	83 7/16
Wide		Deep		High



44	x	32 1/2	x	83 7/16
Wide		Deep		High



48	x	32 1/2	x	83 7/16
Wide		Deep		High



52	x	32 1/2	x	83 7/16
Wide		Deep		High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>KM-901MAH(-P)</b>	Air-Cooled	813	208-230V/60/1	5.1	16.0	N/A	256 Lbs.
<b>KM-901MWH(-P)</b>	Water-Cooled	864	208-230V/60/1	4.5	20.8	128	249 Lbs.
<b>KM-901MRH</b>	Remote A-C	785	208-230V/60/1	5.4	19.3	N/A	249 Lbs.
<b>KM-901MRH3</b>	Remote A-C	815	208-230V/60/1	5.4	18.0	N/A	258 Lbs.

(-P) Exterior fasteners are tamper proof torx pin screws


Rated @ 90° Air / 70° Water



# CUBER SERIES

## KM CRESCENT CUBERS

**KMD-901M SERIES | 30"W X 24 5/8"D X 28"H (ice machine dimensions only)**



Rated in accordance with ARI Standard 810-95



Lancer FS30

30	x	30 1/2	x	39 5/8
Wide		Deep		High



48	x	32 1/2	x	74
Wide		Deep		High


Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KMD-901MWH	Water-Cooled	870	208-230V/60/1*	4.2	24.5	125	251 Lbs.
KMD-901MRH	Remote A-C	775	208-230V/60/1*	5.3	20.0	N/A	258 Lbs.


\*3 wire with neutral for 115V

Rated @ 90" Air / 70" Water

**KM-1301S SERIES | 48"W X 27 3/8"D X 27 3/8"H (ice machine dimensions only)**



Rated in accordance with ARI Standard 810-95




B-800

48	x	32 1/2	x	73 3/8
Wide		Deep		High




B-800

48	x	32 1/2	x	101 3/4
Wide		Deep		High



B-900

52	x	32 1/2	x	73 3/8
Wide		Deep		High



B-900

52	x	32 1/2	x	101 3/4
Wide		Deep		High


Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-1301SAH(-P)	Air-Cooled	1164	208-230V/60/1	4.63	15.7	N/A	315 Lbs.
KM-1301SAH3 *	Air-Cooled	1159	208-230V/60/3	4.6	15.6	N/A	315 Lbs.
KM-1301SWH(-P)	Water-Cooled	1276	208-230V/60/1	3.44	19.6	124	315 Lbs.
KM-1301SWH3	Water-Cooled	1251	208-230V/60/3	3.31	20.5	130	315 Lbs.
KM-1301SRH *	Remote A-C	1222	208-230V/60/1	4.1	16.6	N/A	315 Lbs.
KM-1301SRH3 *	Remote A-C	1197	208-230V/60/3	4.3	16.0	N/A	315 Lbs.

\*The KM-1301SAH3, KM-1301SRH and KM-1301SRH3 are ENERGY STAR qualified.  
(-P) Exterior fasteners are tamper proof torx pin screws

Rated @ 90" Air / 70" Water

**KM-1340M SERIES | 30"W X 27 3/8"D X 41 1/2"H (ice machine dimensions only)**



Rated in accordance with ARI Standard 810-95



B-500

30	x	32 1/2	x	87 1/2
Wide		Deep		High



B-700

44	x	32 1/2	x	87 1/2
Wide		Deep		High



B-800

48	x	32 1/2	x	87 1/2
Wide		Deep		High



B-900

52	x	32 1/2	x	87 1/2
Wide		Deep		High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-1340MAH	Air-Cooled	1167	208-230V/60/1*	4.7	18.3	N/A	315 Lbs.
KM-1340MWH	Water-Cooled	1316	208-230V/60/1*	3.9	19.7	133	293 Lbs.
KM-1340MRH *	Remote A-C	1251	208-230V/60/1*	4.5	18.3	N/A	289 Lbs.

\*The KM-1340MRH is ENERGY STAR qualified.

\*3 wire with neutral for 115V


Rated @ 90" Air / 70" Water

# CUBER SERIES



## KM CRESCENT CUBERS



### KM-1601M SERIES | 30"W X 27 3/8"D X 41 11/16"H (ice machine dimensions only)



CEC Compliant



Rated in accordance with ARI Standard 810-95



30	x	32 1/2	x	87 1/2
Wide		Deep		High

44	x	32 1/2	x	87 1/2
Wide		Deep		High

48	x	32 1/2	x	87 1/2
Wide		Deep		High

52	x	32 1/2	x	87 1/2
Wide		Deep		High


Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>KM-1601MRH</b>	Remote A-C	1417	208-230V/60/1*	4.64	18.6	N/A	316 Lbs.
<b>KM-1601MRH3</b> *	Remote A-C	1391	208-230V/60/3	4.55	19.2	N/A	316 Lbs.

\*The KM-1601MRH3 is ENERGY STAR qualified.

Rated @ 90° Air / 70° Water


### KM-1601S SERIES | 48"W X 27 3/8"D X 27 3/8"H (ice machine dimensions only)



CEC Compliant



Rated in accordance with ARI Standard 810-95



48	x	32 1/2	x	73 3/8
Wide		Deep		High

48	x	32 1/2	x	101 3/4
Wide		Deep		High

52	x	32 1/2	x	73 3/8
Wide		Deep		High

52	x	32 1/2	x	101 3/4
Wide		Deep		High


Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>KM-1601SWH</b>	Water-Cooled	1523	208-230V/60/1*	3.8	24.5	98	360 Lbs.
<b>KM-1601SWH3</b>	Water-Cooled	1565	208-230V/60/3	3.66	23.8	100	360 Lbs.
<b>KM-1601SRH</b>	Remote A-C	1490	208-230V/60/1*	4.36	23.6	N/A	350 Lbs.
<b>KM-1601SRH3</b>	Remote A-C	1498	208-230V/60/3	4.46	23.2	N/A	350 Lbs.

\*3 wire with neutral for 115V

Rated @ 90° Air / 70° Water

### KM-1900S SERIES | 48"W X 27 3/8"D X 36 7/16"H (ice machine dimensions only)



CEC Compliant



Rated in accordance with ARI Standard 810-95



48	x	32 1/2	x	82 7/16
Wide		Deep		High

48	x	32 1/2	x	119 7/8
Wide		Deep		High

52	x	32 1/2	x	82 7/16
Wide		Deep		High

52	x	32 1/2	x	119 7/8
Wide		Deep		High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>KM-1900SAH(-P)</b> *	Air-Cooled	1560	208-230V/60/1*	4.1	18.8	N/A	415 Lbs.
<b>KM-1900SAH3</b> *	Air-Cooled	1530	208-230V/60/3	4.1	17.0	N/A	415 Lbs.
<b>KM-1900SWH(-P)</b>	Water-Cooled	1826	208-230V/60/1*	3.24	16.1	98	415 Lbs.
<b>KM-1900SWH3</b>	Water-Cooled	1814	208-230V/60/3	3.3	18.8	99	415 Lbs.
<b>KM-1900SRH</b> *	Remote A-C	1640	208-230V/60/1*	4.09	20.0	N/A	415 Lbs.
<b>KM-1900SRH3</b>	Remote A-C	1650	208-230V/60/3	4.04	20.9	N/A	415 Lbs.

\*The KM-1900SAH, KM-1900SAH-P, KM-1900SAH3 and KM-1900SRH are ENERGY STAR qualified. \*3 wire with neutral for 115V

Rated @ 90° Air / 70° Water

(-P) Exterior fasteners are tamper proof torx pin screws



# CUBER SERIES

## KM CRESCENT CUBERS

**KMH-2000S SERIES | 36"W X 40"D X 36 7/16"H (ice machine dimensions only)**



Rated in accordance with ARI Standard 810-95

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>KMH-2000SWH</b>	Water-Cooled	1760	208-230V/60/1*	3.30	17.5	84	415 Lbs.
<b>KMH-2000SWH3</b>	Water-Cooled	1840	208-230V/60/3	3.19	17.4	102	415 Lbs.
<b>KMH-2000SRH *</b>	Remote A-C	1694	208-230V/60/1*	3.80	18.1	N/A	415 Lbs.
<b>KMH-2000SRH3 *</b>	Remote A-C	1675	208-230V/60/3	3.70	16.8	N/A	415 Lbs.

\*The KMH-2000SRH and KMH-2000SRH3 are ENERGY STAR qualified.


\*3 wire with neutral for 115V

Rated @ 90° Air / 70° Water

**KM-2100S SERIES | 48"W X 27 3/8"D X 36 7/16"H (ice machine dimensions only)**



Rated in accordance with ARI Standard 810-95

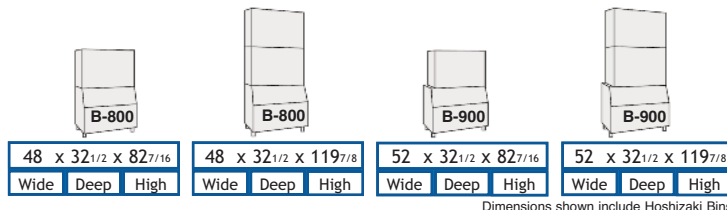


Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>KM-2100SWH3</b>	Water-Cooled	2054	208-230V/60/3	3.18	16.9	95	440 Lbs.
<b>KM-2100SRH3</b>	Remote A-C	1810	208-230V/60/3	4.26	21.1	N/A	440 Lbs.


\*3 wire with neutral for 115V

Rated @ 90° Air / 70° Water

**KM-2500S SERIES | 48"W X 27 3/8"D X 36 7/16"H (ice machine dimensions only)**

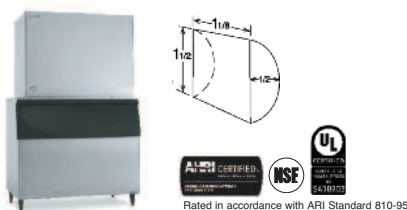

Rated in accordance with ARI Standard 810-95

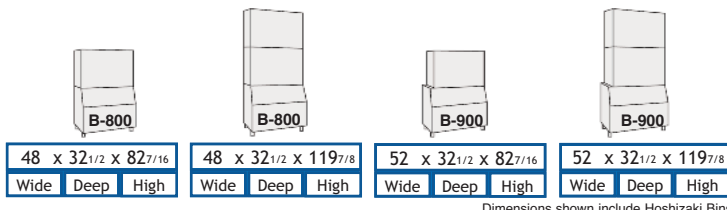

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>KM-2500SWH3</b>	Water-Cooled	2365	208-230V/60/3	3.54	17.2	127	415 Lbs.
<b>KM-2500SRH3</b>	Remote A-C	2235	208-230V/60/3	4.5	18.6	N/A	440 Lbs.

\*3 wire with neutral for 115V


Rated @ 90° Air / 70° Water

# CUBER SERIES



## KM CRESCENT CUBERS - SERENITY SERIES

**KMS-822MLH | 22"W X 24 5/8"D X 28"H (ice machine dimensions only)**



Rated in accordance with ARI Standard 810-95




22	30 1/2	35 3/8
Wide	Deep	High

22	24 5/8	28
Wide	Deep	High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KMS-822MLH	Remote A-C	774	115V/60/1	5.58	19.3	N/A	152 Lbs.

Rated @ 90° Air / 70° Water

**KMS-830MLH | 30"W X 16 1/2"D X 29"H (ice machine dimensions only)**



Rated in accordance with ARI Standard 810-95




30	30 1/2	39 5/8
Wide	Deep	High

30	16 1/2	29
Wide	Deep	High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KMS-830MLH with SRK-8H	Remote A-C	700	115V/60/1	5.50	16.0	N/A	137 Lbs. ice machine only
KMS-830MLH with SRK-8H3	Remote A-C	690	115V/60/1	5.40	16.0	N/A	137 Lbs. ice machine only

Rated @ 90° Air / 70° Water

**KMS-1122MLH | 22"W X 18"D X 31 1/4"H (ice machine dimensions only)**



Rated in accordance with ARI Standard 810-95




22	18	31 1/4
Wide	Deep	High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KMS-1122MLH* with SRK-12H	Remote A-C	985	115V/60/1	4.65	19.5	N/A	150 Lbs. ice machine only
KMS-1122MLH* with SRK-12H3	Remote A-C	1000	115V/60/1	4.6	19.5	N/A	150 Lbs. ice machine only

\*The KMS-1122MLH is ENERGY STAR qualified.

Rated @ 90° Air / 70° Water

**KMS-1401MLJ | 30"W X 24"D X 28"H (ice machine dimensions only)**



Rated in accordance with ARI Standard 810-95



30	30 1/2	39 5/8
Wide	Deep	High

30	24	28
Wide	Deep	High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KMS-1401MLJ with SRK-14J	Remote A-C	1280	115V/60/1	4.70	19.5	N/A	177 Lbs. ice machine only
KMS-1401MLJ with SRK-14J3	Remote A-C	1280	115V/60/1	4.70	19.5	N/A	177 Lbs. ice machine only


Rated @ 90° Air / 70° Water



# CUBER SERIES

## KM CRESCENT CUBERS - SERENITY SERIES

KMS-2000MLH | 30"W X 24"D X 32 7/8"H (ice machine dimensions only)



Rated in accordance with ARI Standard 810-95



Lancer FS30



KMS-2000MLH


30 x 30 1/2 x 39 5/8			30 x 24 x 32 7/8		
Wide	Deep	High	Wide	Deep	High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KMS-2000MLH with SRK-20H	Remote A-C	1786	115V/60/1	4.70	22.0	N/A	206 Lbs. ice machine only
KMS-2000MLH with SRK-20H3	Remote A-C	1706	115V/60/1	4.65	23.3	N/A	206 Lbs. ice machine only

Rated @ 90° Air / 70° Water

## KM CRESCENT CUBERS - MARINE APPLICATION

KM-1400S-M SERIES | 48"W X 27 3/8"D X 27 3/8"H (ice machine dimensions only)




Rated in accordance with ARI Standard 810-95



B-800

48 x 32 1/2 x 73 3/8		
Wide	Deep	High



B-800

48 x 32 1/2 x 101 3/4		
Wide	Deep	High



B-900

52 x 32 1/2 x 73 3/8		
Wide	Deep	High



B-900

52 x 32 1/2 x 101 3/4		
Wide	Deep	High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
KM-1400SWH-M	Water-Cooled	1293	208-230V/60/1*	3.4	18.9	161	315 Lbs.
KM-1400SWH3-M	Water-Cooled	1255	208-230V/60/3	3.3	17.9	146	315 Lbs.

\*2 wire


Rated @ 90° Air / 70° Water

## IM SQUARE CUBER

IM-500S SERIES | 44"W X 27 5/8"D X 21 3/4"H (ice machine dimensions only)




Rated in accordance with ARI Standard 810-95



B-700

44 x 32 1/2 x 67 3/4		
Wide	Deep	High




B-700

44 x 32 1/2 x 89 1/2		
Wide	Deep	High



B-800

48 x 32 1/2 x 67 3/4		
Wide	Deep	High



B-800

48 x 32 1/2 x 89 1/2		
Wide	Deep	High



B-900

52 x 32 1/2 x 67 3/4		
Wide	Deep	High



B-900

52 x 32 1/2 x 89 1/2		
Wide	Deep	High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
IM-500SAA	Air-Cooled	435	115V/60/1	5.45	19.8	N/A	220 Lbs.

\*The IM-500SAA is ENERGY STAR qualified.

Rated @ 90° Air / 70° Water


# FLAKER / CUBELET SERIES



## Features & Benefits of the Flaker / Cubelet Series



Flaked Ice




Cubelet Ice Dimensions

- Attractive stainless steel exterior
- Most models are available in both flaked and cubelet style ice
- The internal auger design produces the highest quality ice with fewer repairs and less down time
- The freezing cylinder is made from cast stainless steel
- The industry's only greaseless bearing design improves life of the machine
- **Hoshizaki Flaker and Cubelet** ice machines have electric water inlet valves and an automatic purge of water from the reservoir for cleaner operation and longer bearing life
- Features Advanced CleanCycle24® design - a 2 second rinse every hour
- Self-contained flakers flush automatically when bin control is activated

### FLAKED ICE USAGE GUIDE

Establishment	Approximate Daily Usage
Restaurant	1.5 lbs. ice per seat
Salad Bar/Seafood Display	30 lbs. ice per ft <sup>3</sup>
Hospital	
Patient Care	10 lbs. ice per bed
Cafeteria	1 lb. ice per seat
Nursing Home	6 lbs. per bed

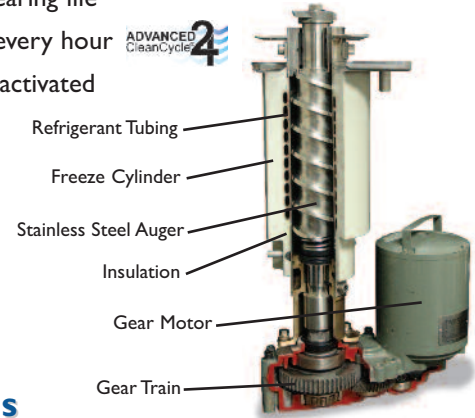

## SELF-CONTAINED FLAKERS with Built-In Bins

### F-300BAF | 36"W X 24"D X 39"H (\*6" Legs Included)



**Self-Contained Bin Storage Capacity**  
Up to 110 Lbs.



36 x 24 x 39*		
Wide	Deep	High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>F-300BAF</b> *	Air-Cooled	303	115V/60/1	4.8	12.0	N/A	210 Lbs.

\*The F-300BAF is ENERGY STAR qualified.

Rated @ 70° Air / 50° Water

### F-330BAH | 24"W X 26"D X 39"H (\*6" Legs Included)



**Self-Contained Bin Storage Capacity**  
Up to 80 Lbs.



24 x 26 x 39*		
Wide	Deep	High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>F-330BAH</b> *	Air-Cooled	330	115V/60/1	4.1	12.0	N/A	178 Lbs.

\*The F-330BAH is ENERGY STAR qualified.

Rated @ 70° Air / 50° Water

### F-500BAF | 38"W X 29"D X 42"H (\*6" Legs Included)



**Self-Contained Bin Storage Capacity**  
Up to 250 Lbs.



38 x 29 x 42*		
Wide	Deep	High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>F-500BAF</b> *	Air-Cooled	478	115V/60/1	4.3	12.0	N/A	270 Lbs.

\*The F-500BAF is ENERGY STAR qualified.

Rated @ 70° Air / 50° Water






# FLAKER / CUBELET SERIES

## FLAKERS


F-450MAH | 22"W X 27 3/8"D X 21 7/8"H (ice machine dimensions only)




22	x	32 1/2	x	68
Wide	Deep	High		




30	x	32 1/2	x	68
Wide	Deep	High		



44	x	32 1/2	x	68
Wide	Deep	High		



48	x	32 1/2	x	68
Wide	Deep	High		



52	x	32 1/2	x	68
Wide	Deep	High		

Dimensions shown include Hoshizaki Bins


Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-450MAH	Air-Cooled	493	115V/60/1	5.35	12.0	N/A	175 Lbs.

Rated @ 70° Air / 50° Water


F-801M SERIES | 22"W X 27 3/8"D X 25 15/16"H (ice machine dimensions only)




22	x	32 1/2	x	71 1/4
Wide	Deep	High		




30	x	32 1/2	x	71 1/4
Wide	Deep	High		



44	x	32 1/2	x	71 1/4
Wide	Deep	High		



48	x	32 1/2	x	71 1/4
Wide	Deep	High		



52	x	32 1/2	x	71 1/4
Wide	Deep	High		

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-801MAH *	Air-Cooled	823	115V/60/1	3.2	12.0	N/A	205 Lbs.
F-801MWH	Water-Cooled	584	115V/60/1	4.1	12.0	81.0	205 Lbs.

\*The F-801MAH is ENERGY STAR qualified.

Rated @ 70° Air / 50° Water


F-1001M SERIES | 22"W X 27 3/8"D X 25 15/16" J (ice machine dimensions only)



22	x	32 1/2	x	71 15/16
Wide	Deep	High		



30	x	32 1/2	x	71 15/16
Wide	Deep	High		



44	x	32 1/2	x	71 15/16
Wide	Deep	High		



48	x	32 1/2	x	71 15/16
Wide	Deep	High		



52	x	32 1/2	x	71 15/16
Wide	Deep	High		

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-1001MAJ *	Air-Cooled	970	115V/60/1	3.8	12.0	N/A	210 Lbs.
F-1001MWJ	Water-Cooled	890	115V/60/1	3.8	12.0	54.0	210 Lbs.
F-1001MRJ	Remote A-C	930	115V/60/1	4.1	12.0	N/A	210 Lbs.
F-1001MLJ	N/A	1150	115V/60/1	1.4	12.0	N/A	150 Lbs.

\*The F-1001MAJ is ENERGY STAR qualified.

Rated @ 70° Air / 50° Water

# FLAKER / CUBELET SERIES




## FLAKERS

**F-1501M SERIES | 30"W X 27 1/2"D X 34 7/16"H (ice machine dimensions only)**




30	x	32 1/2	x	79 1/4
Wide		Deep		High



44	x	32 1/2	x	79 1/4
Wide		Deep		High



48	x	32 1/2	x	79 1/4
Wide		Deep		High



52	x	32 1/2	x	79 1/4
Wide		Deep		High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-1501MAH *	Air-Cooled	1590	208-230V/60/1*	4.03	12.0	N/A	325 Lbs.
F-1501MWH	Water-Cooled	1435	208-230V/60/1*	3.62	12.0	57	325 Lbs.
F-1501MRH *	Remote A-C	1585	208-230V/60/1*	3.85	12.0	N/A	315 Lbs.

\*The F-1501MAH and F-1501MRH are ENERGY STAR qualified.


\*3 wire with neutral for 115V

Rated @ 70° Air / 50° Water

**F-2001M SERIES | 30"W X 27 1/2"D X 34 7/16"H (ice machine dimensions only)**



30	x	32 1/2	x	79 1/4
Wide		Deep		High



44	x	32 1/2	x	79 1/4
Wide		Deep		High



48	x	32 1/2	x	79 1/4
Wide		Deep		High



52	x	32 1/2	x	79 1/4
Wide		Deep		High

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-2001MWH	Water-Cooled	2030	208-230V/60/1*	3.68	12.0	70	342 Lbs.
F-2001MRH	Remote A-C	1990	208-230V/60/1*	4.19	12.0	N/A	360 Lbs.
F-2001MRH3	Remote A-C	2010	208-230V/60/1*	4.33	12.0	N/A	360 Lbs.
F-2001MLH	N/A	2280	115V/60/1	0.6	12.0	N/A	250 Lbs.

\*3 wire with neutral for 115V

Rated @ 70° Air / 50° Water


## SELF-CONTAINED CUBELETS with Built-In Bins

**C-101BAH | 14 7/8"W X 22 5/8"D X 33 1/2"H**

**Under Counter Unit**



**Self-Contained Bin Storage Capacity**  
Up to 29 Lbs.



UL approved for outdoor use



-DS shown with Custom Cabinetry



14 7/8	x	22 5/8	x	33 1/2
Wide		Deep		High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
C-101BAH *	Air-Cooled	92	115V/60/1	8.0	12.0	N/A	115 Lbs.
C-101BAH-DS *	Air-Cooled	92	115V/60/1	8.0	12.0	N/A	115 Lbs.
C-101BAH-AD *	Air-Cooled	92	115V/60/1	8.0	12.0	N/A	115 Lbs.
C-101BAH-ADDS *†	Air-Cooled	92	115V/60/1	8.0	12.0	N/A	115 Lbs.

\*The C-101BAH-(DS) and C-101BAH-AD(DS) are ENERGY STAR qualified.

\*The ADA compliant machine dimensions are 14 7/8" width x 22 5/8" depth x 31 1/2" height

†Designed to accommodate custom cabinetry

Rated @ 70° Air / 50° Water




# FLAKER / CUBELET SERIES

## SELF-CONTAINED CUBELETS with Built-In Bins

**F-330BAH-C | 24"W X 26"D X 39"H (\*6" Legs Included)**



**Self-Contained Bin Storage Capacity**  
Up to 80 Lbs.



24 x 26 x 39\*  
Wide | Deep | High







Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>F-330BAH-C *</b>	Air-Cooled	320	115V/60/1	4.5	12.0	N/A	178 Lbs.

\*The F-330BAH-C is ENERGY STAR qualified.

Rated @ 70° Air / 50° Water

## CUBELETS

**F-450MAH-C | 22"W X 27 3/8"D X 21 7/8"H (ice machine dimensions only)**



22 x 32 1/2 x 68 Wide   Deep   High	30 x 32 1/2 x 68 Wide   Deep   High	44 x 32 1/2 x 68 Wide   Deep   High	48 x 32 1/2 x 68 Wide   Deep   High	52 x 32 1/2 x 68 Wide   Deep   High
--	--	--	--	--


Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>F-450MAH-C</b>	Air-Cooled	431	115V/60/1	6.31	12.0	N/A	175 Lbs.

\*Not recommended for dispensing applications

Rated @ 70° Air / 50° Water

**FD-650M-C SERIES | 22"W X 24"D X 26"H (ice machine dimensions only)**



22 x 24 x 26  
Wide | Deep | High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
<b>FD-650MAH-C *</b>	Air-Cooled	650	115V/60/1	5.35	12.0	N/A	205 Lbs.
<b>FD-650MWH-C</b>	Water-Cooled	615	115V/60/1	3.81	12.0	N/A	205 Lbs.
<b>FD-650MRH-C *</b>	Remote A-C	590	115V/60/1	4.75	12.0	N/A	205 Lbs.

\*The FD-650MAH-C and FD-650MRH-C are ENERGY STAR qualified.


Rated @ 70° Air / 50° Water

# FLAKER / CUBELET SERIES




## CUBELETS


### F-801M-C SERIES | 22"W X 27 3/8"D X 25 15/16"H (ice machine dimensions only)




22	x	32 1/2	x	71 1/4
Wide	Deep	High		




30	x	32 1/2	x	71 1/4
Wide	Deep	High		



44	x	32 1/2	x	71 1/4
Wide	Deep	High		



48	x	32 1/2	x	71 1/4
Wide	Deep	High		



52	x	32 1/2	x	71 1/4
Wide	Deep	High		


Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-801MAH-C *	Air-Cooled	752	115V/60/1	3.5	12.0	N/A	205 Lbs.
F-801MWH-C	Water-Cooled	556	115V/60/1	4.29	12.0	83.0	205 Lbs.

\*The F-801MAH-C is ENERGY STAR qualified.

Rated @ 70° Air / 50° Water


### F-1001M-C SERIES | 22"W X 27 3/8"D X 25 15/16" J (ice machine dimensions only)




22	x	32 1/2	x	71 15/16
Wide	Deep	High		




30	x	32 1/2	x	71 15/16
Wide	Deep	High		



44	x	32 1/2	x	71 15/16
Wide	Deep	High		



48	x	32 1/2	x	71 15/16
Wide	Deep	High		




52	x	32 1/2	x	71 15/16
Wide	Deep	High		

Dimensions shown include Hoshizaki Bins

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-1001MAJ-C	Air-Cooled	910	115V/60/1	3.9	12.0	N/A	210 Lbs.
F-1001MWJ-C	Water-Cooled	790	115V/60/1	3.8	12.0	61.0	210 Lbs.
F-1001MRJ-C	Remote A-C	840	115V/60/1	4.6	12.0	N/A	210 Lbs.

Rated @ 70° Air / 50° Water

### FD-1001M-C SERIES | 22"W X 24"D X 26" J (ice machine dimensions only)



30	x	11	x	26
Wide	Deep	High		

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
FD-1001MAJ-C *	Air-Cooled	940	115V/60/1	3.4	12.0	N/A	210 Lbs.
FD-1001MRJ-C	Remote A-C	930	115V/60/1	3.6	12.0	N/A	210 Lbs.

\*The FD-1001MAJ-C is ENERGY STAR qualified.


Rated @ 70° Air / 50° Water



# FLAKER / CUBELET SERIES

## CUBELETS


**F-1501M-C SERIES | 30"W X 27 1/2"D X 34 7/16"H (ice machine dimensions only)**



30	x	32 1/2	x	79 1/4
Wide		Deep		High



44	x	32 1/2	x	79 1/4
Wide		Deep		High



48	x	32 1/2	x	79 1/4
Wide		Deep		High



52	x	32 1/2	x	79 1/4
Wide		Deep		High

Dimensions shown include Hoshizaki Bins


Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-1501MAH-C	Air-Cooled	1300	208-230V/60/1*	5.36	12.0	N/A	325 Lbs.
F-1501MWH-C	Water-Cooled	1125	208-230V/60/1*	4.55	12.0	65	325 Lbs.
F-1501MRH-C *	Remote A-C	1335	208-230V/60/1*	4.35	12.0	N/A	315 Lbs.

\*The F-1501MRH-C is ENERGY STAR qualified.

\*3 wire with neutral for 115V

Rated @ 70° Air / 50° Water

**F-2001M-C SERIES | 30"W X 27 1/2"D X 34 7/16"H (ice machine dimensions only)**



30	x	32 1/2	x	79 1/4
Wide		Deep		High



44	x	32 1/2	x	79 1/4
Wide		Deep		High



48	x	32 1/2	x	79 1/4
Wide		Deep		High



52	x	32 1/2	x	79 1/4
Wide		Deep		High

Dimensions shown include Hoshizaki Bins


Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
F-2001MRH-C	Remote A-C	1814	208-230V/60/1*	5.1	12.0	N/A	360 Lbs.

\*3 wire with neutral for 115V

Rated @ 70° Air / 50° Water

## CUBELETS - SERENITY SERIES

**FS-1001MLH-C - SERENITY SERIES | 30"W X 11"D X 26"H (ice machine dimensions only)**



30	x	30 1/2	x	39 5/8
Wide		Deep		High



30	x	11	x	26
Wide		Deep		High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs. 90/70	70/50	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
FS-1001MLH-C	Remote A-C	830	115V/60/1	5.96	4.94	12.0	N/A	166 Lbs.


Rated @ 70° Air / 50° Water

# FLAKER / CUBELET SERIES



## CUBELETS - SERENITY SERIES

**FS-1022MLH-C - SERENITY SERIES | 22"W X 16 1/2"D X 26"H (ice machine dimensions only)**



30	x	30 1/2	x	39 5/8
Wide		Deep		High




22	x	16 1/2	x	26
Wide		Deep		High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.		Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
				90/70	70/50			
FS-1022MLH-C	Remote A-C	830	115V/60/1	5.96	4.94	12.0	N/A	166 Lbs.

Rated @ 70° Air / 50° Water

**FS-1500MLH-C - SERENITY SERIES | 30"W X 16 1/2"D X 33"H (ice machine dimensions only)**



30	x	30 1/2	x	39 5/8
Wide		Deep		High



30	x	16 1/2	x	33
Wide		Deep		High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.		Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
				90/70	70/50			
FS-1500MLH-C	Remote A-C	1491	115V/60/1	4.51	3.75	12.0	N/A	222 Lbs.

Rated @ 70° Air / 50° Water





# DISPENSER SERIES

## DCM SERIES

**DCM-270BAH | 16 9/16" W X 24 1/8" D X 31 11/16" H (\*4" Legs Included - dispenser dimensions only)**



**Ice Bin Storage Capacity**  
Up to 9 Lbs.



16 9/16 X 24 1/8 X 31 11/16  
Wide Deep High


Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
DCM-270BAH	Air-Cooled	282	115V/60/1	5.5	12.0	N/A	165 Lbs.

Rated @ 70° Air / 50° Water

**DCM-300BAH | 26" W X 22 1/2" D X 40" H (ice machine / dispenser dimensions only)**



**Ice Bin Storage Capacity**  
Up to 40 Lbs.




26 x 22 1/2 x 40  
Wide Deep High



26 x 22 1/2 x 46  
Wide Deep High

Floor Model with Optional Stand



26 x 22 1/2 x 72 1/2  
Wide Deep High



Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
DCM-300BAH	Air-Cooled	321	115V/60/1	6.84	12.5	N/A	240 Lbs.

Rated @ 70° Air / 50° Water

**DCM-500B | 26" W X 22 1/2" D X 40" H (ice machine / dispenser dimensions only)**



**Ice Bin Storage Capacity**  
Up to 40 Lbs.



26 x 22 1/2 x 40  
Wide Deep High



26 x 22 1/2 x 46  
Wide Deep High

Floor Model with Optional Stand



26 x 22 1/2 x 72 1/2  
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
DCM-500BAH	Air-Cooled	618	115V/60/1	4.4	12.0	N/A	276 Lbs.
DCM-500BWH	Water-Cooled	567	115V/60/1	4.1	12.0	44.3	269 Lbs.

Rated @ 70° Air / 50° Water




# DISPENSER SERIES

## DCM SERIES

DCM-751B | 34 1/16"W X 28 1/2"D X 48 1/16"H (ice machine / dispenser dimensions only)



**Ice Bin Storage Capacity**  
Up to 95 Lbs.



34 1/16 X 28 1/2 X 48 1/16  
Wide Deep High



34 1/16 X 28 1/2 X 54 1/16  
Wide Deep High



34 1/16 X 28 1/2 X 80 1/2  
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
DCM-751BAH	Air-Cooled	801	115V/60/1	5.94	12.0	N/A	345 Lbs.
DCM-751BWH	Water-Cooled	800	115V/60/1	4.77	12.0	47.0	345 Lbs.

Rated @ 70" Air / 50" Water



## DCM OPTI-SERVE™ SERIES

DCM-270BAH-OS | 16 9/16"W X 24 1/8"D X 31 1/16"H (\*4" Legs Included - dispenser dimensions only)



**OPTI-SERVE**

**Ice Bin Storage Capacity**  
Up to 9 Lbs.



16 9/16 X 24 1/8 X 31 1/16  
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
DCM-270BAH-OS	Air-Cooled	288	115V/60/1	5.5	12.0	N/A	165 Lbs.

Rated @ 70" Air / 50" Water



**\*\*Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.**

DCM-300BAH-OS | 26"W X 22 1/2"D X 40"H (ice machine / dispenser dimensions only)



**OPTI-SERVE**


**Ice Bin Storage Capacity**  
Up to 40 Lbs.



26 X 22 1/2 X 40  
Wide Deep High



26 X 22 1/2 X 46  
Wide Deep High



26 X 22 1/2 X 72 1/2  
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
DCM-300BAH-OS	Air-Cooled	321	115V/60/1	6.84	12.5	N/A	240 Lbs.

Rated @ 70" Air / 50" Water

**\*\*Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.**





# DISPENSER SERIES


## DCM OPTI-SERVE™ SERIES

DCM-500B-OS | 26"W X 22 1/2"D X 40"H (ice machine / dispenser dimensions only)



**OPTI-SERVE**

**Ice Bin Storage Capacity**  
Up to 40 Lbs.




Counter-Top




26 x 22 1/2 x 40  
Wide Deep High

Counter-Top with Optional 6" Legs



26 x 22 1/2 x 46  
Wide Deep High

Floor Model with Optional Stand



26 x 22 1/2 x 72 1/2  
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
DCM-500BAH-OS	Air-Cooled	618	115V/60/1	4.4	12.0	N/A	276 Lbs.
DCM-500BWH-OS	Water-Cooled	567	115V/60/1	4.0	12.0	52.0	269 Lbs.

Rated @ 70° Air / 50° Water


**\*\*Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.**

DCM-751B-OS | 34 1/16"W X 28 1/2"D X 48 1/16"H (ice machine / dispenser dimensions only)



**OPTI-SERVE**

**Ice Bin Storage Capacity**  
Up to 95 Lbs.



Counter-Top




34 1/16 x 28 1/2 x 48 1/16  
Wide Deep High

Counter-Top with Optional 6" Legs



34 1/16 x 28 1/2 x 54 1/16  
Wide Deep High

Floor Model with Optional Stand



34 1/16 x 28 1/2 x 80 1/2  
Wide Deep High

Model Number	Condenser	Lbs. of ice per 24 hours	Electrical	KWH per 100 Lbs.	Potable Water Gal. per 100 lbs.	Condenser Water Gal. per 100 lbs.	Shipping Weight
DCM-751BAH-OS	Air-Cooled	801	115V/60/1	5.94	12.0	N/A	345 Lbs.
DCM-751BWH-OS	Water-Cooled	800	115V/60/1	4.77	12.0	47.0	345 Lbs.

Rated @ 70° Air / 50° Water

**\*\*Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.**

# DISPENSER SERIES



## Features & Benefits of Hoshizaki Dispensers


- Attractive stainless steel exterior provides long life and easy maintenance
- Crescent cube dispensers feature a built-in insulated storage bin with a “U”-shaped design
- Prevents clumping and three dimensional agitation assists in delivering ice conveniently
- **DB Series** accommodates KM Series cubers
- **DKM Hotel Dispenser** features the industries only one-piece design and is 35% quieter than other hotel dispensers
- **DCM Series** dispenses easy to chew cubelet ice and water
- Hoshizaki’s **DCM Opti-Serve™ Series** offers hands-free dispensing and helps eliminate the possibility of cross-contamination
- All dispensers feature built-in ice storage capacity

OPTI-SERVE



### DB SERIES

**DB-130H | 22"W X 30"D X 53"H (\*6" Legs Included - dispenser dimensions only)**



ALARM CERTIFIED  
NSF  
UL  
Rated in accordance with ARI Standard 820-95




22 x 30 x 53  
Wide Deep High

KM-320/461/515M Cuber sold separately



22 x 30 x 83<sup>5/16</sup>  
Wide Deep High


KM-600/650M Cuber sold separately



22 x 30 x 90<sup>1/2</sup>  
Wide Deep High

Model Number	Application Ice Storage Capacity	ARI-Rated Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker KWH per 100 lbs.	Shipping Weight
DB-130H	130 lbs.	90 lbs.	20 lbs. / min.	115V/60/1	N/A	215 Lbs.

**DB-200H | 30"W X 30"D X 53"H (\*6" Legs Included - dispenser dimensions only)**



ALARM CERTIFIED  
NSF  
UL  
Rated in accordance with ARI Standard 820-95



30 x 30 x 53  
Wide Deep High

KML-250/351/451 Cuber sold separately



30 x 30 x 75  
Wide Deep High

KML-631 Cuber sold separately



30 x 30 x 79  
Wide Deep High

KM-461/515M Cuber sold separately



30 x 30 x 83<sup>5/16</sup>  
Wide Deep High

KM-600/650M Cuber sold separately



30 x 30 x 90<sup>1/2</sup>  
Wide Deep High

Model Number	Application Ice Storage Capacity	ARI-Rated Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker KWH per 100 lbs.	Shipping Weight
DB-200H	200 lbs.	140 lbs.	13 lbs. / min.	115V/60/1	N/A	240 Lbs.



# DISPENSER SERIES

## DKM SERENITY SERIES

DKM-500B\_H | 30"W X 28"D X 77"H (\*6" Legs Included)




30	x	28	x	77
Wide		Deep		High

Model Number	Lbs. of Ice per 24 hrs.	Application Ice Storage Capacity	ARI-Rated Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker KWH per 100 lbs.	Shipping Weight
DKM-500BAH *	466 lbs.	200 lbs.	140 lbs.	13 lbs. / min.	115V/60/1	6.53	410 Lbs.
DKM-500BWH	441 lbs.	200 lbs.	140 lbs.	13 lbs. / min.	115V/60/1	4.98	372 Lbs.

\*The DKM-500BAH is ENERGY STAR qualified.



## DM SERIES

DM-200B | 30"W X 28"D X 36 3/8"H (dispenser dimensions only)



Counter-Top

Counter-Top with optional 4" legs



30	x	28	x	36 3/8
Wide		Deep		High

30	x	28	x	40 3/8
Wide		Deep		High


Model Number	Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker Production per 24 hrs.	Icemaker KWH per 100 lbs.	Shipping Weight
DM-200B	200 lbs.	7.5 lbs. / min.	115-120V/60/1	N/A	N/A	240 Lbs.

## DISPENSER STAND SERIES

SD STANDS | (\*6" Legs Included)



- Heavy duty stands for floor model ice machines/dispensers
- Attractive stainless steel exterior
- Easy cleaning and maintenance
- For **DM** and **DCM** Series Dispensers
- Locking doors standard (excluding SD-450 & 700)




SD - 200

30	x	28	x	32 13/16
Wide		Deep		High



SD - 270

16 1/2	x	24	x	35 3/16
Wide		Deep		High



SD - 450


26 1/4	x	22	x	32 1/2
Wide		Deep		High

Model Number	Use with Ice Machine / Dispenser Model	Shipping Weight
SD-200	DM-200B	125 lbs.
SD-270	DCM-270 (-OS)	95 lbs.
SD-450	DCM-300 (-OS) / DCM-500 (-OS)	110 lbs.
SD-500	DCM-300 (-OS) / DCM-500 (-OS)	100 lbs.
SD-700	DCM-751 (-OS)	165 lbs.
SD-750	DCM-751 (-OS)	125 lbs.




SD - 500

25 7/8	x	22	x	32 3/4
Wide		Deep		High



SD - 700

34 1/4	x	28 1/4	x	32 1/2
Wide		Deep		High



SD - 750

34	x	28	x	32 3/4
Wide		Deep		High

# ICE STORAGE BINS



Hoshizaki Ice Storage Bins are available with either stainless steel or vinyl clad exterior for easy cleaning and long lasting attractive appearance. Sturdy construction for side-by-side or stacked installations, and non-corrosive bin liner provide safe, sanitary storage of ice cubes or flaked ice. Foamed-in-place polyurethane insulation in all bin walls, and bottom, provides dependable ice storage. The new baffle design increases ice accessibility by 30%. *H-GUARD Plus* Antimicrobial Agent adds extra protection to the storage bin and ice scoop.



## ICE STORAGE BIN MODEL APPLICATION

Model Number	Application Storage Capacity	ARI Rated Storage Capacity	Dimensions w" x d" x h"	Shipping Weight
<b>B-250PF</b>	250 lbs.	230 lbs.	30" x 32 1/2" x 33 3/8"	130 lbs.
<b>B-300PF / SF</b>	300 lbs.	260 lbs.	22" x 32 1/2" x 46"	135 lbs.
<b>BD-300PF / SF</b>	300 lbs.	260 lbs.	22" x 32 1/2" x 46"	135 lbs.
<b>B-500PF / SF</b>	500 lbs.	360 lbs.	30" x 32 1/2" x 46"	155 lbs.
<b>BD-500PF / SF</b>	500 lbs.	360 lbs.	30" x 32 1/2" x 46"	155 lbs.
<b>B-700PF / SF</b>	700 lbs.	550 lbs.	44" x 32 1/2" x 46"	200 lbs.
<b>B-800PF / SF</b>	800 lbs.	600 lbs.	48" x 32 1/2" x 46"	210 lbs.
<b>B-900PF / SF</b>	900 lbs.	660 lbs.	52" x 32 1/2" x 46"	220 lbs.
<b>B-1150SS</b>	1150 lbs.	N/A	48" x 41" x 60"	345 lbs.
<b>B-1300SS</b>	1275 lbs.	N/A	48" x 41" x 66"	365 lbs.
<b>B-1500SS</b>	1500 lbs.	N/A	60" x 41" x 62"	395 lbs.
<b>B-1650SS</b>	1605 lbs.	N/A	60" x 41" x 66"	415 lbs.



**B-500SF**



**B-1650SS**

SS = stainless steel front, side, back and bottom

## PF / SF SERIES BINS



**B-250PF**

30	x	32 1/2	x	33 3/8
Wide	Deep	High		




**B-300PF/SF  
BD-300PF/SF**

22	x	32 1/2	x	46
Wide	Deep	High		




**B-500PF/SF  
BD-500PF/SF**

30	x	32 1/2	x	46
Wide	Deep	High		




**B-700PF/SF**

44	x	32 1/2	x	46
Wide	Deep	High		



**B-800PF/SF**

48	x	32 1/2	x	46
Wide	Deep	High		



**B-900PF/SF**

52	x	32 1/2	x	46
Wide	Deep	High		

## SS SERIES BINS




**B-1150SS**

48	x	41	x	60
Wide	Deep	High		




**B-1300SS**

48	x	41	x	66
Wide	Deep	High		



**B-1500SS**

60	x	41	x	62
Wide	Deep	High		



**B-1650SS**

60	x	41	x	66
Wide	Deep	High		



# TOP KIT APPLICATION

## ICE MACHINES

22" Width	22" Width	30" Width	30" Width	44" Width	44" Width	48" Width	60" Width
KM-320M	KMD-410M	KM-901M	KMD-450M	2 KM-320M	2 KMD-410M	KM-1301S	2 KM-901M**
KM-515M	KMS-822M	KM-1340M	KMD-850M	2 KM-515M	2 KM-822M	KM-1400S	2 KM-1340M
KM-600M	FD-650M-C	KM-1601M	KMD-901MRH	2 KM-600M	2 FD-650M-C	KM-1601S	2 KM-1601M
KM-650M	FD-1001M-C	KML Series	KMD-901MWH	2 KM-650M	2 FD-1001M-C	KM-1900S	2 KML Series
F-450M		F-1501M	KMS-1401M	IM-500S*		KM-2100S	2 F-1501M
F-801M		F-2001M	KMS-2000M	2 F-450M		KM-2500S	2 F-2001M
F-1001M				2 F-801M			2 KMD-850M
				2 F-1001M			2 KMD-901M

<b>22" Width</b> B-300PF/SF	NO TOP KIT NEEDED	N/A	N/A	N/A	N/A	N/A	N/A	N/A
<b>30" Width</b> B-250PF B-500PF/SF	NEED HS-2033	NEED HS-2033 & HS-2129	NO TOP KIT NEEDED	NEED HS-2129 NO TOP KIT NEEDED	N/A	N/A	N/A	N/A
<b>44" Width</b> B-700PF/SF	NEED HS-2035	NEED HS-2035 & HS-2130	NEED HS-2034	NEED HS-2130 & HS-2034	NO TOP KIT NEEDED	NEED HS-2130	N/A	N/A
<b>48" Width</b> B-800PF/SF	NEED HS-2035 & HS-2032	NEED HS-2035 & HS-2032/2131	NEED HS-2034 & HS-2032	NEED HS-2131 & HS-2034/2032	NEED HS-2032	NEED HS-2032 & HS-2131	NO TOP KIT NEEDED	N/A
<b>48" Width</b> B-1150SS B-1300SS	UNIVERSAL TOP KIT INCLUDED	N/A	UNIVERSAL TOP KIT INCLUDED	UNIVERSAL TOP KIT INCLUDED NEED HS-2147	N/A	N/A	UNIVERSAL TOP KIT INCLUDED	N/A
<b>52" Width</b> B-900PF/SF	NEED HS-2035 & HS-2033	NEED HS-2035 & HS-2033/2132	NEED HS-2035	NEED HS-2132 & HS-2035	NEED HS-2033	NEED HS-2033 & HS-2132	NEED HS-2032	N/A
<b>60" Width</b> B-1500SS B-1650SS	N/A	N/A	UNIVERSAL TOP KIT INCLUDED NEED HS-2111	N/A	UNIVERSAL TOP KIT INCLUDED *(N/A for IM-500)	N/A	UNIVERSAL TOP KIT INCLUDED	UNIVERSAL TOP KIT INCLUDED
<b>30" Width</b> DB-200H	NEED HS-2036 (DB-TOP KIT)	NEED HS-2036 (DB-TOP KIT) & HS-2148	NO TOP KIT NEEDED	HS-2148 (KMD-450 ONLY)	N/A	N/A	N/A	N/A

Any KMS\* or FD on bin need Top Kit Extension:

- HS-2129 - for use with B-500 bins
- HS-2130 - for use with B-700 bins
- HS-2131 - for use with B-800 bins
- HS-2132 - for use with B-900 bins
- HS-2147 - for use with B-1150 & 1300 bins

\*Excludes KMS-830MLH

BD Bin Applications - contact Factory

HS-2032 - 4" ABS Top Kit

HS-2033 - 8" ABS Top Kit

HS-2034 - 14" ABS Top Kit

HS-2035 - 22" ABS Top Kit

HS-2036 - (2) 4" ABS Top Kits


HS-2111 - 11.3" x 26.2" Stainless Cover/Separator

HS-2148 - 30" x 3.1" Stainless Cover

\*\* HS-2160 - for use with 2 KM-901M

## HCD ICE BAGGING SYSTEM SERIES

### HCD SERIES



30	x	36	x	71
Wide		Deep		High

48	x	36	x	71
Wide		Deep		High


Model Number	Application Ice Storage Capacity	Dispensing Rate	Electrical	Shipping Weight
HCD-500B	647 lbs.	120 lbs. / min.	115V/60/1	510 Lbs.
HCD-1000B	1078 lbs.	120 lbs. / min.	115V/60/1	590 Lbs.

# REMOTE CONDENSER SERIES



## AIR-COOLED REMOTE CONDENSERS - URC / SRC / SRK

An Ice Machine with a **Remote Air Condenser** provides quiet operation at the icemaker location, improves efficiency, and saves energy with cooler operation. Sturdy construction and weather-resistant cabinet finish provides long life operation. **Remote Condensers** may be installed outdoors up to 55' from the icemaker. For installations exceeding 55', contact a Factory Technical Service Representative.



- URC-5F
- URC-9F
- URC-14F
- URC-22F
- URC-23F




- SRC-10H
- SRC-14H

- SRK-8H
- SRK-10H
- SRK-12H(3)
- SRK-14J(3)
- SRK-20H(3)

SRK shown without Legs

### Remote Condenser Installation on Roof

For best performance allow 24" clearance for air circulation

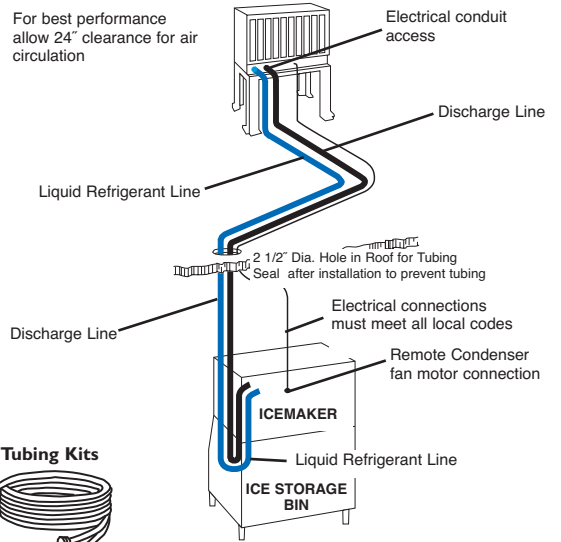

Ice maker and Storage Bin Sold Separately


Model Number	Ice Machine	Electrical	Shipping Weight	20' Length	35' Length	55' Length
URC-5F	KM-515MRH KM-650MRH FD-1001MRJ-C F-1001MRJ(-C)	115V/60/1	60 lbs.	R404-2046-2	R-404-3546-2	N/A
SRK-8H(3)	KMS-830MLH	208-230V/60/1	206 lbs.	25' - HS-0250 (Brazing Required)	35' - HS-0251 (Brazing Required)	55' - HS-0252 (Brazing Required)
URC-9F	KML-631MRH KMD-850MRH KM-901MRH(3) KMD-901MRH	115V/60/1	95 lbs.	R404-2068-2	R-404-3568-2	R-404-5568-2
SRC-10H	FS-1001MLH-C FS-1022MLH-C	208-230V/60/1	180 lbs.	R404-20410	R-404-35410	R-404-55410
SRK-10H	KMS-822MLH	208-230V/60/1	273 lbs.	25' - HS-0250 (Brazing Required)	35' - HS-0251 (Brazing Required)	55' - HS-0252 (Brazing Required)
SRK-12H(3)	KMS-1122MLH	208-230V/60/1(3)	275 lbs.	R404-20810	R-404-35810	R-404-55810
SRC-14H	FS-1500MLH-C	208-230V/60/1	235 lbs.	R404-20610	R-404-35610	R-404-55610
SRK-14J(3)	KMS-1401MLJ	208-230V/60/1(3)	275 lbs.	R404-20810	R-404-35810	R-404-55810
URC-14F	KM-1301SRH(3) KM-1340MRH F-1501MRH(-C)	115V/60/1	110 lbs.	R404-2068-2	R-404-3568-2	R-404-5568-2
SRK-20H(3)	KMS-2000MLH	208-230V/60/1	325 lbs.	25' - HS-0243 (Brazing Required)	35' - HS-0244 (Brazing Required)	55' - HS-0245 (Brazing Required)
URC-22F	KM-1601MRH(3) KM-1601SRH(3) KM-1900SRH(3) KM-2100SRH3 F-2000MRH(3) F-2001MRH(-C)	208-230V/60/1	210 lbs.	R404-20610	R-404-35610	R-404-55610
URC-23F	KM-2500SRH3	208-230V/60/1	210 lbs.	R404-20610	R-404-35610	R-404-55610




**URC-5F**  
24 x 18<sup>1</sup>/<sub>8</sub> x 32<sup>13</sup>/<sub>16</sub>  
Wide Deep High



**URC-9F**  
34<sup>5</sup>/<sub>16</sub> x 18<sup>1</sup>/<sub>8</sub> x 36<sup>15</sup>/<sub>16</sub>  
Wide Deep High




**URC-14F**  
37<sup>13</sup>/<sub>16</sub> x 18<sup>1</sup>/<sub>8</sub> x 37  
Wide Deep High




**SRK-20H(3)**  
62 x 21 x 45  
Wide Deep High




**SRK-8H(3)**  
35<sup>11</sup>/<sub>16</sub> x 25<sup>3</sup>/<sub>8</sub> x 37  
Wide Deep High



**SRC-10H**  
30<sup>1</sup>/<sub>4</sub> x 25<sup>3</sup>/<sub>8</sub> x 34<sup>7</sup>/<sub>8</sub>  
**SRC-14H**  
37<sup>7</sup>/<sub>8</sub> x 25<sup>1</sup>/<sub>2</sub> x 37  
Wide Deep High



**SRK-10H / SRK-12H(3)  
SRK-14J(3)**  
52<sup>3</sup>/<sub>8</sub> x 19<sup>1</sup>/<sub>2</sub> x 43  
Wide Deep High



**URC-22F / URC-23F**  
46<sup>3</sup>/<sub>8</sub> x 17<sup>1</sup>/<sub>4</sub> x 40<sup>1</sup>/<sub>2</sub>  
Wide Deep High




## Features & Benefits of Hoshizaki Display Cases

- **HNC Sushi Cases** feature five models to choose from providing a wide selection for displaying
- Cases are refrigerated and contain a larger condenser face, improving cooling performance
- Self-contained refrigeration unit - ease of installation
- NSF approved thermometer



## HNC SERIES

### HNC SERIES



Refer to Chart Below

Wide	Deep	High
------	------	------

Model Number	Condenser	Refrigeration Unit Location (Front View)	Dimensions W x D x H	Electrical	Shipping Weight
<b>HNC-120BA-R-S</b>	Air-Cooled	Right Side	47 1/4 x 13 5/8 x 11	115V/60/1	90 Lbs.
<b>HNC-120BA-L-S</b>	Air-Cooled	Left Side	47 1/4 x 13 5/8 x 11	115V/60/1	90 Lbs.
<b>HNC-150BA-R-S</b>	Air-Cooled	Right Side	59 1/16 x 13 5/8 x 11	115V/60/1	105 Lbs.
<b>HNC-150BA-L-S</b>	Air-Cooled	Left Side	59 1/16 x 13 5/8 x 11	115V/60/1	105 Lbs.
<b>HNC-180BA-R-S</b>	Air-Cooled	Right Side	70 7/8 x 13 5/8 x 11	115V/60/1	120 Lbs.
<b>HNC-180BA-L-S</b>	Air-Cooled	Left Side	70 7/8 x 13 5/8 x 11	115V/60/1	120 Lbs.
<b>HNC-210BA-R-S</b>	Air-Cooled	Right Side	82 11/16 x 13 5/8 x 11	115V/60/1	135 Lbs.
<b>HNC-210BA-L-S</b>	Air-Cooled	Left Side	82 11/16 x 13 5/8 x 11	115V/60/1	135 Lbs.



## Features & Benefits

### Commercial Series Features

- Stainless steel exterior front and sides for long life, durability and easy maintenance
- Energy efficient, vacuum formed, seamless, one piece ABS interior liner
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks
- One piece, full length, extruded aluminum, flush mount door handle maximizes aisle space
- Solid state, digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Units are shipped with standard factory installed casters
- 79.63" High, cabinet will go through standard door opening



### Professional Series Features

- Stainless steel interior and exterior for long life, durability and easy maintenance
- Energy efficient thermostatic expansion valve, self contained refrigeration system
- Innovative Variable Speed Compressor with "adaptive control" technology
- **EverCheck**® digital control system with audio alarms
- Rapid pull down and recovery times
- Self-closing stainless steel doors with torsion spring all metal hinges and locks
- Flush mounted door handle maximizes aisle space
- Hinged front panel for easy access to refrigeration system
- Removable, cleanable air filter protects condenser and reduces cleaning



### Professional and Commercial Series Features

- Unique "ducted" air distribution system, achieves a uniform cabinet temperature even when full
- Cabinets and doors are insulated with 2 3/8" foamed in place polyurethane
- Exclusive "stepped" door design to protect recessed door gasket
- Shelves are adjustable in 1" increments, allowing maximum interior flexibility
- Field reversible doors (with optional kit)
- Enamel coated evaporator coil
- Automatic hot gas condensate disposable system, eliminates need for external drain
- Three year parts and labor warranty







# REACH-IN SERIES

## COMMERCIAL SERIES

### REFRIGERATORS

- Stainless steel exterior front and sides
- Energy efficient, vacuum formed, seamless, one piece ABS interior liner
- Cabinet and doors are insulated with 2-3/8" of R-134A CFC-free polyurethane foam
- Doors are constructed of stainless steel exterior and interior
- 4" Heavy duty casters standard



	CRIB-FS(L)	CRIB-HS(L)	CR2B-FS	CR2B-HS	CR3B-FS	CR3B-HS
<b>Nominal Storage Capacity</b>	23.3 ft <sup>3</sup>	23.3 ft <sup>3</sup>	51.0 ft <sup>3</sup>	51.0 ft <sup>3</sup>	74.3 ft <sup>3</sup>	74.3 ft <sup>3</sup>
<b>Interior Storage Capacity (CF) (AHAM)</b>	21.0 ft <sup>3</sup>	21.0 ft <sup>3</sup>	47.0 ft <sup>3</sup>	47.0 ft <sup>3</sup>	68.2 ft <sup>3</sup>	67.9 ft <sup>3</sup>
<b>Overall Width</b>	27.5"	27.5"	55"	55"	83"	83"
<b>Overall Depth</b>	33.6"	33.6"	33.6"	33.6"	33.6"	33.6"
<b>Height (including 4" casters)</b>	79.63"	79.63"	79.63"	79.63"	79.63"	79.63"
<b>Depth with doors open at 90°</b>	59.6"	59.6"	59.6"	59.6"	59.6"	59.6"
<b>Interior Door opening width</b>	22.8"	22.8"	22.8"	22.8"	22.8"	22.8"
<b>Interior Door opening height</b>	59.6"	28.1"	59.6"	28.1"	59.6"	28.1"
<b>Adjustable Shelves</b>	3	3	6	6	6 (L) / 3 (R)	6 (L) / 3 (R)
<b>Shelf Dimensions (W x D)</b>	21.5" x 26"	21.5" x 26"	23.9" x 24.6"	23.9" x 24.6"	(L) 23.9" x 24.6" (R) 21.25" x 26"	(L) 23.9" x 24.6" (R) 21.25" x 26"
<b>Crated Shipping Weight</b>	315 lbs.	315 lbs.	600 lbs.	600 lbs.	915 lbs.	915 lbs.
<b>Crated Height</b>	83"	83"	83"	83"	83"	83"
<b>Crated Width</b>	31.5"	31.5"	59"	59"	90.5"	90.5"
<b>Crated Depth</b>	39.5"	39.5"	39.5"	39.5"	39.5"	39.5"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	3.7	3.7	7.0	8.0	12.0	12.0
<b>HACR Breaker</b>	15.0	15.0	15.0	15.0	20.0	20.0
<b>Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	2.52	2.1	3.05	5.9	5.57	5.80
<b>Heat Rejection (BTU / hr)</b>	450	450	866	1226	866 (L) / 450 (R)	866 (L) / 450 (R)
<b>Voltage Range</b>	104 - 126	96 - 136	104 - 126	96 - 136	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Control Set Point Range</b>	34° - 52°F	30° - 50°F	34° - 52°F	30° - 50°F	34° - 52°F	34° - 52°F
<b>Refrigerant</b>	R-134A	R-134A	R-134A	R-134A	R-134A	R-134A

\*CR1B-HS and CR2B-FS are ENERGY STAR qualified.

\*Based on 100°F ambient cycling at set point

# REACH-IN SERIES



## COMMERCIAL SERIES

### REFRIGERATORS

- Stainless steel exterior front and sides
- Energy efficient, vacuum formed, seamless, one piece ABS interior liner
- Cabinet is insulated with 2-3/8" of R-134A CFC-free polyurethane foam
- Glass doors are energy efficient Multi Pane, Argon filled with Low-E non reflective coating and locks
- 4" Heavy duty casters standard


**CR1B-FGY**

**CR2B-FGY**

**CR3B-FGY**

<b>Nominal Storage Capacity</b>	23.3 ft <sup>3</sup>	51.0 ft <sup>3</sup>	74.3 ft <sup>3</sup>
<b>Interior Storage Capacity (CF) (AHAM)</b>	20.9 ft <sup>3</sup>	47.2 ft <sup>3</sup>	68.2 ft <sup>3</sup>
<b>Overall Width</b>	27.5"	55"	83"
<b>Overall Depth</b>	34.8"	34.8"	34.8"
<b>Height (including 4" casters)</b>	79.63"	79.63"	79.63"
<b>Depth with doors open at 90°</b>	60.5"	60.5"	60.5"
<b>Interior Door opening width</b>	22.8"	22.8"	22.8"
<b>Interior Door opening height</b>	59.6"	59.6"	59.6"
<b>Adjustable Shelves</b>	3	6	6 (L) / 3 (R)
<b>Shelf Dimensions (W x D)</b>	21.5" x 26"	23.9" x 24.6"	(L) 23.9" x 24.6" (R) 21.25" x 26"
<b>Crated Shipping Weight</b>	343 lbs.	656 lbs.	970 lbs.
<b>Crated Height</b>	83"	83"	83"
<b>Crated Width</b>	31.5"	59"	90.5"
<b>Crated Depth</b>	39.5"	39.5"	39.5"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	4.1	6.2	10.3
<b>HACR Breaker</b>	15.0	15.0	20.0
<b>Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	3.12	4.97	5.57
<b>Heat Rejection (BTU / hr)</b>	626	1137	1890
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F
<b>Control Set Point Range</b>	34° - 52°F	34° - 52°F	34° - 52°F
<b>Refrigerant</b>	R-134A	R-134A	R-134A

\*CR1B-FGY and CR2B-FGY are ENERGY STAR qualified.

\*Based on 100°F ambient cycling at set point



# REACH-IN SERIES

## COMMERCIAL SERIES

### FREEZERS

- Stainless steel exterior front and sides
- Energy efficient, vacuum formed, seamless, one piece ABS interior liner
- Cabinet and doors are insulated with 2-3/8" of R-134A CFC-free polyurethane foam
- Doors are constructed of stainless steel exterior and interior
- 4" Heavy duty casters standard



	CF1B-FS(L)	CF1B-HS(L)	CF2B-FS	CF2B-HS	CF3B-FS	CF3B-HS
<b>Nominal Storage Capacity</b>	23.3 ft <sup>3</sup>	23.3 ft <sup>3</sup>	51.0 ft <sup>3</sup>	51.0 ft <sup>3</sup>	74.3 ft <sup>3</sup>	74.3 ft <sup>3</sup>
<b>Interior Storage Capacity (CF) (AHAM)</b>	20.9 ft <sup>3</sup>	21.0 ft <sup>3</sup>	47.2 ft <sup>3</sup>	47.0 ft <sup>3</sup>	68.2 ft <sup>3</sup>	67.9 ft <sup>3</sup>
<b>Overall Width</b>	27.5"	27.5"	55"	55"	83"	83"
<b>Overall Depth</b>	33.6"	33.6"	33.6"	33.6"	33.6"	33.6"
<b>Height (including 4" casters)</b>	79.63"	79.63"	79.63"	79.63"	79.63"	79.63"
<b>Depth with doors open at 90°</b>	59.6"	59.6"	59.6"	59.6"	59.6"	59.6"
<b>Interior Door opening width</b>	22.8"	22.8"	22.8"	22.8"	22.8"	22.8"
<b>Interior Door opening height</b>	59.6"	28.1"	59.6"	28.1"	59.6"	28.1"
<b>Adjustable Shelves</b>	3	3	6	6	6 (L) / 3 (R)	6 (L) / 3 (R)
<b>Shelf Dimensions (W x D)</b>	21.5" x 26"	23.9" x 24.6"	23.9" x 24.6"	23.9" x 24.6"	(L) 23.9" x 24.6" (R) 21.25" x 26"	(L) 23.9" x 24.6" (R) 21.25" x 26"
<b>Crated Shipping Weight</b>	315 lbs.	315 lbs.	600 lbs.	600 lbs.	915 lbs.	915 lbs.
<b>Crated Height</b>	83"	83"	83"	83"	83"	83"
<b>Crated Width</b>	31.5"	31.5"	59"	59"	90.5"	90.5"
<b>Crated Depth</b>	39.5"	39.5"	39.5"	39.5"	39.5"	39.5"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115/208-230/1	115/208-230/1
<b>Amperage</b>	9.5	9	11.1	11.1	16.0	16.0
<b>HACR Breaker</b>	15.0	15.0	15.0	15.0	20.0	20.0
<b>Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	5.95	6.8	11.46	11.8	17.41	18.23
<b>Heat Rejection (BTU / hr)</b>	1305	1635	2137	2137	2137(L) / 1305(R)	2137(L) / 1305(R)
<b>Voltage Range</b>	104 - 126	96 - 136	104 - 126	96 - 136	208 - 254	208 - 254
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Control Set Point Range</b>	-10° - +12°F	-10° - +10°F	-10° - +12°F	-10° - +10°F	-10° - +12°F	-10° - +12°F
<b>Refrigerant</b>	R-404A	R-404A	R-404A	R-404A	R-404A	R-404A

\*CF1B-FS, CF1B-HS, CF2B-FS and CF2B-HS are ENERGY STAR qualified.

\*Based on 100°F ambient cycling at set point

# REACH-IN SERIES



## COMMERCIAL SERIES

### FREEZERS

- Stainless steel exterior front and sides
- Energy efficient, vacuum formed, seamless, one piece ABS interior liner
- Cabinet is insulated with 2-3/8" of R-134A CFC-free polyurethane foam
- Glass doors are energy efficient Triple Pane, Argon filled with Low-E non reflective coating and locks
- 4" Heavy duty casters standard



**CF1B-FG**



**CF2B-FG**

	<b>CF1B-FG</b>	<b>CF2B-FG</b>
<b>Nominal Storage Capacity</b>	23.3 ft <sup>3</sup>	51.0 ft <sup>3</sup>
<b>Interior Storage Capacity (CF) (AHAM)</b>	20.9 ft <sup>3</sup>	47.2 ft <sup>3</sup>
<b>Overall Width</b>	27.5"	55"
<b>Overall Depth</b>	34.8"	34.8"
<b>Height (including 4" casters)</b>	79.63"	79.63"
<b>Depth with doors open at 90°</b>	60.5"	60.5"
<b>Interior Door opening width</b>	22.8"	22.8"
<b>Interior Door opening height</b>	59.6"	59.6"
<b>Adjustable Shelves</b>	3	6
<b>Shelf Dimensions (W x D)</b>	21.5" x 26"	23.9" x 24.6"
<b>Crated Shipping Weight</b>	382 lbs.	600 lbs.
<b>Crated Height</b>	83"	83"
<b>Crated Width</b>	31.5"	59"
<b>Crated Depth</b>	39.5"	39.5"
<b>Voltage</b>	115V/60/1	115V/60/1
<b>Amperage</b>	9.0	9.8
<b>HACR Breaker</b>	15.0	15.0
<b>Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	8.68	13.73
<b>Heat Rejection (BTU / hr)</b>	1493	1952
<b>Voltage Range</b>	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 80°F	45° - 80°F
<b>Control Set Point Range</b>	-10° to +12°F	-10° to +12°F
<b>Refrigerant</b>	R-404A	R-404A

\*CF1B-FG and CF2B-FG are ENERGY STAR qualified.

\*Based on 100°F ambient cycling at set point



# REACH-IN SERIES

## COMPACT UNDERCOUNTER SERIES

### REFRIGERATOR

- Stainless steel exterior
- UL approval for outdoor use
- Energy efficient, one piece ABS interior liner
- Door is stainless steel exterior, aluminum interior and is field reversible
- Ducted air flow for even air distribution throughout cabinet
- Built-in cabinet installation with louvered trim



**HR24A**

<b>Interior Storage Capacity (CF) (AHAM)</b>	4.0 ft <sup>3</sup>
<b>Overall Width</b>	23.4"
<b>Overall Depth</b>	24.5"
<b>Height (including 4" casters)</b>	32.7"
<b>Depth with doors open at 90°</b>	46.4"
<b>Interior Door opening width</b>	18.1"
<b>Adjustable Shelves</b>	3
<b>Shelf Dimensions (W x D)</b>	(1) 19.13" x 11" (2) 19.13" x 16"
<b>Voltage</b>	115V/60/1
<b>Amperage</b>	2.0
<b>HACR Breaker</b>	15.0
<b>Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	0.378
<b>Voltage Range</b>	104 - 127
<b>Ambient Temp. Range</b>	60° - 95°F
<b>Control Set Point Range</b>	36° - 50°F
<b>Refrigerant</b>	R-134A

\*HR24A is ENERGY STAR qualified.

\*Based on 100°F ambient cycling at set point

# REACH-IN SERIES



## COMMERCIAL SERIES - UNDERCOUNTERS

### REFRIGERATORS

- Stainless steel exterior front, sides and top
- Stainless steel exterior door and drawers with ABS interior liner
- Cabinet and doors are insulated with 2" of R-134A CFC-free polyurethane foam
- Field reversible door
- 4" Stem casters standard (2.25" casters - LP model)
- -01 - Door locks 27" & 48"



	CRMR27	CRMR27-LP	CRMR48	CRMR60	CRMR72
<b>Nominal Storage Capacity</b>	7.2 ft <sup>3</sup>	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>	17.55 ft <sup>3</sup>	21.25 ft <sup>3</sup>
<b>Interior Storage Capacity (CF) (AHAM)</b>	6.22 ft <sup>3</sup>	6.22 ft <sup>3</sup>	11.95 ft <sup>3</sup>	16.6 ft <sup>3</sup>	19.7 ft <sup>3</sup>
<b>Overall Width</b>	27"	27"	48"	60"	72"
<b>Overall Depth</b>	30"	30"	30"	30"	30"
<b>Height (including 4" casters)</b>	33.63"	32.3"	33.63"	33.63"	33.63"
<b>Depth with doors open at 90°</b>	54.5"	54.5"	51.5"	57.5"	51.5"
<b>Interior Door opening width</b>	22.6"	22.6"	19.5"	25.5"	19.5"
<b>Interior Door opening height</b>	22.9"	22.9"	22.9"	22.9"	22.9"
<b>Adjustable Shelves</b>	1	1	2	2	3
<b>Shelf Dimensions (W x D)</b>	22.0" x 16.0"	22.0" x 16.0"	21.3" x 16.0"	27.3" x 15.9"	22.0" x 16.0"
<b>Crated Shipping Weight</b>	160 lbs.	160 lbs.	222 lbs.	268 lbs.	312 lbs.
<b>Crated Height</b>	36.5"	36.5"	36.5"	36.75"	36.5"
<b>Crated Width</b>	31.5"	31.5"	52.5"	62"	74"
<b>Crated Depth</b>	34"	34"	34"	34"	34"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	2.6	2.6	2.6	4.2	2.6
<b>HACR Breaker</b>	15.0	15.0	15.0	15.0	15.0
<b>Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	.65	.65	1.44	2.15	2.84
<b>Heat Rejection (BTU / hr)</b>	180	180	327	414	539
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Temperature Range</b>	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
<b>Refrigerant</b>	R-134A	R-134A	R-134A	R-134A	R-134A

\*CRMR27, CRMR27-LP and CRMR48 are ENERGY STAR qualified.



# REACH-IN SERIES

## COMMERCIAL SERIES - UNDERCOUNTERS with DRAWERS

### REFRIGERATORS

- Stainless steel exterior front, sides and top
- Stainless steel exterior door with ABS interior liner
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- 4" Stem casters standard



**CRMR27-D**

**CRMR48-D4**

<b>Nominal Storage Capacity</b>	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>
<b>Interior Storage Capacity (CF) (AHAM)</b>	6.22 ft <sup>3</sup>	11.95 ft <sup>3</sup>
<b>Overall Width</b>	27"	48"
<b>Overall Depth</b>	30"	30"
<b>Height (incl. 4" casters)</b>	33.63"	33.63"
<b>Depth with drawer fully open</b>	43.25"	43.25"
<b>Drawer opening width</b>	22.6"	19.5"
<b>Drawer opening height</b>	22.9"	22.9"
<b>Drawer Pan Capacity (pans by others)</b>	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
<b>Pan Capacity (# of 1/6 size x 4" deep)</b>	N/A	N/A
<b>Crated Shipping Weight</b>	176 lbs.	262 lbs.
<b>Crated Height</b>	36.5"	36.5"
<b>Crated Width</b>	31.5"	52.5"
<b>Crated Depth</b>	34"	34"
<b>Voltage</b>	115V/60/1	115V/60/1
<b>Amperage</b>	2.6	2.6
<b>HACR Breaker</b>	15.0	15.0
<b>Energy Consumption (kwh 7 day) ENERGY STAR/DOE/NSF</b>	1.4	2.3
<b>Heat Rejection (BTU / hr)</b>	202.8	327
<b>Voltage Range</b>	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F
<b>Temperature Range</b>	32° - 52°F	32° - 52°F
<b>Refrigerant</b>	R-134A	R-134A

# REACH-IN SERIES



## COMMERCIAL SERIES - UNDERCOUNTERS

### FREEZERS

- Stainless steel exterior front, sides and top
- Stainless steel exterior door with ABS interior liner
- Cabinet and doors are insulated with 2" of R-134A CFC-free polyurethane foam
- Field reversible door
- 4" Stem casters standard (2.25" casters - LP model)
- -01 - Door locks 27" & 48"



CRMF27

CRMF27-LP

CRMF48

CRMF60

<b>Nominal Storage Capacity</b>	7.2 ft <sup>3</sup>	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>	17.55 ft <sup>3</sup>
<b>Interior Storage Capacity (CF) (AHAM)</b>	6.22 ft <sup>3</sup>	6.22 ft <sup>3</sup>	11.95 ft <sup>3</sup>	16.6 ft <sup>3</sup>
<b>Overall Width</b>	27"	27"	48"	60"
<b>Overall Depth</b>	30"	30"	30"	30"
<b>Height (incl. 4" casters, -LP 2.25")</b>	33.63"	32.3"	33.63"	33.63"
<b>Depth with doors open at 90°</b>	54.5"	54.5"	51.5"	57.5"
<b>Interior Door opening width</b>	22.6"	22.6"	19.5"	25.5"
<b>Interior Door opening height</b>	22.9"	22.9"	22.9"	22.9"
<b>Adjustable Shelves</b>	1	1	2	2
<b>Shelf Dimensions (W x D)</b>	22.0" x 16.0"	22.0" x 16.0"	21.3" x 16.0"	27.3" x 15.9"
<b>Crated Shipping Weight</b>	160 lbs.	160 lbs.	238 lbs.	268 lbs.
<b>Crated Height</b>	36.5"	36.5"	36.5"	36.5"
<b>Crated Width</b>	31.5"	31.5"	52.5"	62"
<b>Crated Depth</b>	34"	34"	34"	34"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	3.4	3.4	6.0	6.0
<b>HACR Breaker</b>	15.0	15.0	15.0	15.0
<b>Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	2.66	2.66	4.34	4.86
<b>Heat Rejection (BTU / hr)</b>	442	442	820	821
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Temperature Range</b>	-18° - +10°F	-18° - +10°F	-18° - +10°F	-10° - +10°F
<b>Refrigerant</b>	R-134A	R-134A	R-134A	R-134A

\*CRMF27, CRMF27-LP, CRMF48 and CRMF60 are ENERGY STAR qualified.





# REACH-IN SERIES

## COMMERCIAL SERIES - UNDERCOUNTER with DRAWERS

### FREEZERS

- Stainless steel exterior front, sides and top
- Stainless steel exterior door with ABS interior liner
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- 4" Stem casters standard



**CRMF27-D**

Nominal Storage Capacity	7.2 ft <sup>3</sup>
Interior Storage Capacity (CF) (AHAM)	6.22 ft <sup>3</sup>
Overall Width	27"
Overall Depth	30"
Height (incl. 4" casters)	33.63"
Depth with drawer fully open	43.25"
Drawer opening width	22.6"
Drawer opening height	22.9"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer
Pan Capacity (# of 1/6 size x 4" deep)	N/A
Crated Shipping Weight	176 lbs.
Crated Height	36.5"
Crated Width	31.5"
Crated Depth	34"
Voltage	115V/60/1
Amperage	3.4
HACR Breaker	15.0
Energy Consumption (kwh 7 day) ENERGY STAR/DOE/NSF	3.9
Heat Rejection (BTU / hr)	560
Voltage Range	104 - 126
Ambient Temp. Range	45° - 100°F
Temperature Range	-18° - +10°F
Refrigerant	R-134A

# REACH-IN SERIES



## COMMERCIAL SERIES - WORKTOPS

### REFRIGERATORS

- Stainless steel exterior front, sides and top
- Stainless steel exterior door with ABS interior liner
- Cabinet and doors are insulated with 2" of R-134A CFC-free polyurethane foam
- Field reversible door
- 6" Stem casters standard
- -01 - Door locks 27" & 48"



CRMR27-W

CRMR48-W

CRMR60-W

CRMR72-W

	CRMR27-W	CRMR48-W	CRMR60-W	CRMR72-W
<b>Nominal Storage Capacity</b>	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>	17.55 ft <sup>3</sup>	21.25 ft <sup>3</sup>
<b>Interior Storage Capacity (CF) (AHAM)</b>	6.22 ft <sup>3</sup>	11.95 ft <sup>3</sup>	16.6 ft <sup>3</sup>	19.7 ft <sup>3</sup>
<b>Overall Width</b>	27"	48"	60"	72"
<b>Overall Depth</b>	30"	30"	30"	30"
<b>Height (including 6" casters)</b>	40"	40"	40"	40"
<b>Depth with doors open at 90°</b>	54.5"	51.5"	57.5"	51.5"
<b>Interior Door opening width</b>	22.6"	19.5"	25.5"	19.5"
<b>Interior Door opening height</b>	22.9"	22.9"	22.9"	22.9"
<b>Adjustable Shelves</b>	1	2	2	3
<b>Shelf Dimensions (W x D)</b>	22.8" x 16.0"	21.3" x 16.0"	27.3" x 15.9"	22.0" x 16.0"
<b>Crated Shipping Weight</b>	156 lbs.	222 lbs.	272 lbs.	317 lbs.
<b>Crated Height</b>	40.5"	40.5"	40.75"	40.5"
<b>Crated Width</b>	31.5"	52.5"	62"	74"
<b>Crated Depth</b>	34"	34"	34"	34"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	2.6	2.6	4.2	2.6
<b>HACR Breaker</b>	15.0	15.0	15.0	15.0
<b>Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	.65	1.44	2.15	4.2
<b>Heat Rejection (BTU / hr)</b>	180	327	414	539
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Temperature Range</b>	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
<b>Refrigerant</b>	R-134A	R-134A	R-134A	R-134A

\*CRMR27-W and CRMR48-W are ENERGY STAR qualified.



# REACH-IN SERIES

## COMMERCIAL SERIES - WORKTOPS with DRAWERS

### REFRIGERATORS

- Stainless steel exterior front, sides and top
- Stainless steel exterior drawer with ABS interior liner
- Cabinet and drawers are insulated with 2" of foamed in place polyurethane
- 6" Stem casters standard



CRMR27-WD

CRMR48-WD4

Nominal Storage Capacity	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>
Interior Storage Capacity (CF) (AHAM)	6.22 ft <sup>3</sup>	11.95 ft <sup>3</sup>
Overall Width	27"	48"
Overall Depth	30"	30"
Height (including 6" casters)	40"	40"
Depth with drawer fully open	43.25"	43.25"
Drawer opening width	22.6"	19.5"
Drawer opening height	22.9"	22.9"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	N/A	N/A
Crated Shipping Weight	176 lbs.	263 lbs.
Crated Height	40.5"	40.5"
Crated Width	31.5"	52.5"
Crated Depth	34"	34"
Voltage	115V/60/1	115V/60/1
Amperage	2.6	2.6
HACR Breaker	15.0	15.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	1.4	2.3
Heat Rejection (BTU / hr)	202.8	327
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F
Refrigerant	R-134A	R-134A

# REACH-IN SERIES



## COMMERCIAL SERIES - WORKTOPS

### FREEZERS

- Stainless steel exterior front, sides and top
- Stainless steel exterior door with ABS interior liner
- Cabinet and doors are insulated with 2" of R-134A CFC-free polyurethane foam
- Field reversible door
- 6" Stem casters standard
- -01 - Door locks 27" & 48"



**CRMF27-W**



**CRMF48-W**



**CRMF60-W**

<b>Nominal Storage Capacity</b>	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>	17.55 ft <sup>3</sup>
<b>Interior Storage Capacity (CF) (AHAM)</b>	6.22 ft <sup>3</sup>	11.95 ft <sup>3</sup>	16.6 ft <sup>3</sup>
<b>Overall Width</b>	27"	48"	60"
<b>Overall Depth</b>	30"	30"	30"
<b>Height (including 6" casters)</b>	40"	40"	40"
<b>Depth with doors open at 90°</b>	54.5"	51.5"	57.5"
<b>Interior Door opening width</b>	22.6"	19.5"	25.5"
<b>Interior Door opening height</b>	22.9"	22.9"	22.9"
<b>Adjustable Shelves</b>	1	2	2
<b>Shelf Dimensions (W x D)</b>	22.8" x 16.0"	21.3" x 16.0"	27.3" x 15.9"
<b>Crated Shipping Weight</b>	160 lbs.	238 lbs.	272 lbs.
<b>Crated Height</b>	40.5"	40.5"	40.5"
<b>Crated Width</b>	31.5"	52.5"	62"
<b>Crated Depth</b>	34"	34"	34"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	3.4	6.0	6.0
<b>HACR Breaker</b>	15.0	15.0	15.0
<b>Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	2.66	4.34	4.86
<b>Heat Rejection (BTU / hr)</b>	442	820	821
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F
<b>Temperature Range</b>	-18° - +10°F	20° - 52°F	-10° - +10°F
<b>Refrigerant</b>	R-134A	R-134A	R-134A

\*CRMF27-W, CRMF48-W and CRMF60-W are ENERGY STAR qualified.



# REACH-IN SERIES

## COMMERCIAL SERIES - WORKTOPS with DRAWERS

### FREEZERS

- Stainless steel exterior front, sides and top
- Stainless steel exterior drawer with ABS interior liner
- Cabinet and drawers are insulated with 2" of foamed in place polyurethane
- 6" Stem casters standard



CRMF27-WD

Nominal Storage Capacity	7.2 ft <sup>3</sup>
Interior Storage Capacity (CF) (AHAM)	6.22 ft <sup>3</sup>
Overall Width	27"
Overall Depth	30"
Height (including 6" casters)	40"
Depth with drawer fully open	43.25"
Drawer opening width	22.6"
Drawer opening height	22.9"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer
Pan Capacity (# of 1/6 size x 4" deep)	N/A
Crated Shipping Weight	176 lbs.
Crated Height	40.5"
Crated Width	31.5"
Crated Depth	34"
Voltage	115V/60/1
Amperage	3.4
HACR Breaker	15.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	3.9
Heat Rejection (BTU / hr)	560
Voltage Range	104 - 126
Ambient Temp. Range	45° - 100°F
Temperature Range	-18° - +10°F
Refrigerant	R-134A





# REACH-IN SERIES

## COMMERCIAL SERIES - PREP TABLES - SANDWICH TOP

### REFRIGERATORS

- Stainless steel exterior front, sides and top
  - Stainless steel exterior door with ABS interior liner
  - Cabinet and doors are insulated with 2" of R-134A CFC-free polyurethane foam
  - Field reversible door
  - Provided with full complement of polycarbonate plastic 1/6th size pans
  - 6" Stem casters standard
- (-8) - 8 Pan capacity, 4" deep
  - (-12) - 12 Pan capacity, 4" deep



**CRMR27-8D**



**CRMR48-12D4**

<b>Nominal Storage Capacity</b>	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>
<b>Overall Width</b>	27"	48"
<b>Overall Depth</b>	30"	30"
<b>Height (including 6" casters)</b>	45.2"	45.2"
<b>Depth with Cutting Board installed</b>	30.7"	30.7"
<b>Depth with drawer fully open</b>	43.25"	43.25"
<b>Drawer opening width</b>	22.6"	19.5"
<b>Drawer opening height</b>	22.9"	22.9"
<b>Drawer Pan Capacity (pans by others)</b>	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
<b>Pan Capacity (# of 1/6 size x 4" deep)</b>	8 (6" max. pan depth)	12 (6" max. pan depth)
<b>Crated Shipping Weight</b>	205 lbs.	262 lbs.
<b>Crated Height</b>	45.1"	45.1"
<b>Crated Width</b>	31.5"	52.5"
<b>Crated Depth</b>	34"	34"
<b>Voltage</b>	115V/60/1	115V/60/1
<b>Amperage</b>	2.6	2.9
<b>HACR Breaker</b>	15.0	15.0
<b>Energy Consumption (kwh / day) ENERGY STAR/DOE</b>	1.6	4.0
<b>Heat Rejection (BTU / hr)</b>	230	567
<b>Voltage Range</b>	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 86°F	45° - 100°F
<b>Temperature Range</b>	32° - 52°F	32° - 52°F
<b>Refrigerant</b>	R-134A	R-134A

# REACH-IN SERIES



## COMMERCIAL SERIES - PREP TABLES - MEGA TOP

### REFRIGERATORS

- Stainless steel exterior front, sides and top
- Stainless steel exterior door with ABS interior liner
- Cabinet and doors are insulated with 2" of R-134A CFC-free polyurethane foam
- Field reversible door
- Provided with full complement of polycarbonate plastic 1/6th size pans
- 6" Stem casters standard
- (-12M) - 12 Pan capacity, 4" deep
- (-24M) - 24 Pan capacity, 4" deep
- 60"x10"x1/2" thick polyethylene cutting board is standard for CRMR-60-18M / -24M
- 72"x10"x1/2" thick polyethylene cutting board is standard for CRMR-72-18M / -24M / -30M
- (-18M) - 18 Pan capacity, 4" deep
- (-30M) - 30 Pan capacity, 4" deep


**CRMR27-12M CRMR48-12M / -18M**
**CRMR60-12M / -18M / -24M**
**CRMR72-18M / -24M / -30M**

	CRMR27-12M	CRMR48-12M / -18M	CRMR60-12M / -18M / -24M	CRMR72-18M / -24M / -30M
<b>Nominal Storage Capacity</b>	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>	13.66 ft <sup>3</sup>	17.55 ft <sup>3</sup> 17.55 ft <sup>3</sup> 17.55 ft <sup>3</sup>
<b>Overall Width</b>	27"	48"	48"	60" 60" 60" 72" 72" 72"
<b>Overall Depth</b>	30"	30"	30"	30" 30" 30" 31" 31" 31"
<b>Height (including 6" casters)</b>	45.2"	45.2"	45.2"	45.2" 45.2" 45.2" 45.2" 45.2" 45.2"
<b>Depth with Cutting Board installed</b>	30.7"	35.3"	35.3"	35.3" 35.3" 35.3" 35.3" 35.3" 35.3"
<b>Depth with doors open at 90°</b>	54.5"	51.5"	51.5"	51.5" 51.5" 51.5" 51.5" 51.5" 51.5"
<b>Interior Door opening width</b>	22.75"	19.5"	19.5"	25.5" 25.5" 25.5" 19.5" 19.5" 19.5"
<b>Interior Door opening height</b>	22.9"	22.9"	22.9"	22.9" 22.9" 22.9" 22.9" 22.9" 22.9"
<b>Adjustable Shelves</b>	1	2	2	2 2 2 3 3 3
<b>Shelf Dimensions (W x D)</b>	22.0" x 16.0"	21.3" x 16.0"	21.3" x 16.0"	22" x 15.9" 22" x 15.9" 22" x 15.9" 22" x 15.9" 22" x 15.9" 22" x 15.9"
<b>Crated Shipping Weight</b>	185 lbs.	260 lbs.	260 lbs.	323 lbs. 323 lbs. 323 lbs. 375 lbs. 375 lbs. 375 lbs.
<b>Crated Height</b>	45.1"	45.1"	45.1"	45.1" 45.1" 45.1" 45.7" 45.7" 45.7"
<b>Crated Width</b>	31.5"	52.5"	52.5"	64.5" 64.5" 64.5" 74" 74" 74"
<b>Crated Depth</b>	34"	34"	34"	34" 34" 34" 34" 34" 34"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1 115V/60/1 115V/60/1 115V/60/1 115V/60/1 115V/60/1
<b>Amperage</b>	2.6	2.9	2.9	5.5 5.5 5.5 5.5 5.5 5.5
<b>HACR Breaker</b>	15.0	15.0	15.0	15.0 15.0 15.0 15.0 15.0 15.0
<b>Energy Consumption (kwh / day) ENERGY STAR/DOE</b>	2.6	4.0	4.0	4.2 4.2 4.2 6.54 6.54 6.54
<b>Heat Rejection (BTU / hr)</b>	540	567	567	597.5 597.5 597.5 929 929 929
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126 104 - 126 104 - 126 104 - 126 104 - 126 104 - 126
<b>Ambient Temp. Range</b>	45° - 86°F	45° - 100°F	45° - 100°F	45° - 86°F 45° - 86°F 45° - 86°F 45° - 86°F 45° - 86°F 45° - 86°F
<b>Temperature Range</b>	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F 32° - 52°F 32° - 52°F 32° - 52°F 32° - 52°F 32° - 52°F
<b>Refrigerant</b>	R-134A	R-134A	R-134A	R-134A R-134A R-134A R-134A R-134A R-134A





# REACH-IN SERIES

## COMMERCIAL SERIES - PREP TABLES - MEGA TOP

### REFRIGERATORS

- Stainless steel exterior front, sides and top
- Stainless steel exterior drawer with stainless steel interior liner
- Cabinet and drawers are insulated with 2" of CFC free, foamed in place polyurethane
- Enamel coated evaporator coil
- Standard with 6" stem casters (two with brakes)

- 27"x10"x1/2" thick white polyethylene cutting board is standard



CRMR27-12MD

- 48" x 10" x 1/2" thick white polyethylene cutting board is standard



CRMR48-18MD4

Nominal Storage Capacity	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>
Overall Width	27"	48"
Overall Depth	30"	30"
Height (including 6" casters)	45.2"	45.2"
Depth with Cutting Board installed	37.3"	35.3"
Depth with drawer fully open	49.25"	43.25"
Drawer opening width	22.6"	19.5"
Drawer opening height	22.9"	22.9"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	12 (6" max. pan depth)	18 (6" max. pan depth)
Crated Shipping Weight	205 lbs.	262 lbs.
Crated Height	45.1"	45.1"
Crated Width	31.5"	52.5"
Crated Depth	34"	34"
Voltage	115V/60/1	115V/60/1
Amperage	2.6	2.9
HACR Breaker	15.0	15.0
*Energy Consumption (kwh / day) ENERGY STAR/DOE	1.6	4.0
*Heat Rejection (BTU / hr)	230	567
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 86°F	45° - 86°F
Temperature Range	32° - 52°F	32° - 52°F
Refrigerant	R-134A	R-134A

# REACH-IN SERIES



## COMMERCIAL SERIES - PREP TABLES - PIZZA

### REFRIGERATORS

- Stainless steel exterior front, sides and top
- Stainless steel exterior door with ABS interior liner
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Field reversible door
- 6" Stem casters standard



CPT46

CPT67

CPT93

	CPT46	CPT67	CPT93
<b>Nominal Storage Capacity</b>	11.0 ft <sup>3</sup>	19.9 ft <sup>3</sup>	30.1 ft <sup>3</sup>
<b>Overall Width</b>	46"	67"	93"
<b>Overall Depth</b>	32.24"	32.24"	32.24"
<b>Height (including 6" casters)</b>	43.45"	43.45"	43.45"
<b>Depth with doors open at 90°</b>	57.71"	57.71"	57.71"
<b>Interior Door opening width</b>	22.6"	22.6"	22.6"
<b>Interior Door opening height</b>	22.9"	22.9"	22.9"
<b>Adjustable Shelves</b>	2	4	6
<b>Shelf Dimensions (W x D)</b>	22.0" x 15.9"	24.8" x 25.61"	24.8" x 25.61"
<b>Pan Capacity (# of 1/3 size x 4" deep)</b>	6 (6" max. pan depth)	9 (6" max. pan depth)	12 (6" max. pan depth)
<b>Crated Shipping Weight</b>	283 lbs.	400 lbs.	628 lbs.
<b>Crated Height</b>	44.25"	44.25"	44.25"
<b>Crated Width</b>	47.75"	68.75"	94.75"
<b>Crated Depth</b>	33.75"	33.75"	33.75"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	5.5	5.5	5.5
<b>HACR Breaker</b>	15.0	15.0	15.0
<b>Energy Consumption (kwh 7 day) @NSF</b>	3.2	5.0	5.5
<b>Heat Rejection (BTU / hr)</b>	454	778	775.3
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 86°F	45° - 86°F	45° - 86°F
<b>Control Set Point Range</b>	28° - 45°F	28° - 45°F	28° - 45°F
<b>Refrigerant</b>	R-134A	R-134A	R-134A



# REACH-IN SERIES

## COMMERCIAL SERIES - PIZZA TABLES with DRAWERS

### REFRIGERATORS

- Stainless steel exterior front, sides and top
- Stainless steel exterior drawers with stainless steel interior liner
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- Standard with 6" casters (two with brakes)

- 67" x 19" x 1/2" thick white polyethylene cutting board is standard



**CPT67-D4**

Nominal Storage Capacity	19.9 ft <sup>3</sup>
Overall Width	67"
Overall Depth	32.24"
Height (including 6" casters)	43.45"
Depth with Cutting Board installed	35.17"
Depth with drawer fully open	58.24"
Drawer opening width	22.59"
Drawer opening height	22.92"
Drawer Pan Capacity (pans by others)	(2) 12" x 20" x 6" DP pans
Pan Capacity (# of 1/3 size x 4" deep)	9
Crated Shipping Weight	387 lbs.
Crated Height	44.25"
Crated Width	68.75"
Crated Depth	33.75"
Voltage	115V/60/1
Amperage	5.5
HACR Breaker	15.0
*Energy Consumption (kwh / day) ENERGY STAR/DOE	6.0
*Heat Rejection (BTU / hr)	848
Voltage Range	104 - 126
Ambient Temp. Range	45° - 86°F
Control Setpoint Range	28° - 45°F
Refrigerant	R-134A

# REACH-IN SERIES



## PROFESSIONAL SERIES

### REFRIGERATORS

- Stainless steel interior and exterior
- Energy efficient thermostatic expansion valve self contained refrigeration system
- Innovative Variable Speed Compressor with "adaptive control" technology
- Doors are constructed of high grade stainless steel
- EverCheck® controls with audio and visual alert



RH1-SSE-FS    RH1-SSE-HS    RH2-SSE-FS    RH2-SSE-HS    RH3-SSE-FS    RH3-SSE-HS

	RH1-SSE-FS	RH1-SSE-HS	RH2-SSE-FS	RH2-SSE-HS	RH3-SSE-FS	RH3-SSE-HS
<b>Interior Storage Capacity</b>	22.3 ft <sup>30</sup>	22.3 ft <sup>3</sup>	48.0 ft <sup>3</sup>	48.0 ft <sup>3</sup>	74.0 ft <sup>3</sup>	74.0 ft <sup>3</sup>
<b>Overall Width</b>	27.5"	27.5"	56"	56"	82.5"	82.5"
<b>Overall Depth</b>	33.6"	33.6"	33.6"	33.6"	33.6"	33.6"
<b>Height (including 4" casters)</b>	82.5"	82.5"	82.5"	82.5"	82.5"	82.5"
<b>Depth with doors open at 90°</b>	58.5"	58.5"	58.5"	58.5"	58.5"	58.5"
<b>Interior Door opening width</b>	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
<b>Interior Door opening height</b>	59.25"	26.75"	59.25"	26.75"	59.25"	26.75"
<b>Adjustable Shelves</b>	3	3	6	6	9	9
<b>Center Shelves</b>	N/A	N/A	3	3	6	6
<b>Shelf Dimensions (W x D)</b>	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"
<b>Crated Shipping Weight</b>	400 lbs.	400 lbs.	625 lbs.	625 lbs.	825 lbs.	825 lbs.
<b>Crated Height</b>	85"	85"	85"	85"	85"	85"
<b>Crated Width</b>	32"	32"	59"	59"	87"	87"
<b>Crated Depth</b>	38"	38"	38"	38"	38"	38"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	4.3	4.3	6.0	6.0	7.1	7.1
<b>HACR Breaker</b>	15.0	15.0	15.0	15.0	15.0	15.0
<b>Energy Consumption. (kwh / day) ENERGY STAR / DOE</b>	2.1	1.9	3.4	3.9	4.3	4.3
<b>Heat Rejection (BTU / hr)</b>	582	582	938	938	2,085	2,085
<b>Voltage Range</b>	80 - 140	80 - 140	80 - 140	80 - 140	80 - 140	80 - 140
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Control Set Point Range</b>	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F
<b>Refrigerant</b>	R-404A	R-404A	R-404A	R-404A	R-404A	R-404A

\*RH1-SSE-FS, RH1-SSE-HS, RH2-SSE-FS, RH3-SSE-FS and RH3-SSE-HS are ENERGY STAR qualified.

\*Based on 100°F ambient cycling at set point



# REACH-IN SERIES

## PROFESSIONAL SERIES

### REFRIGERATORS

- Stainless steel interior and exterior
- Energy efficient thermostatic expansion valve self contained refrigeration system
- Innovative Variable Speed Compressor with "adaptive control" technology
- Doors are constructed of high grade stainless steel
- EverCheck® controls with audio and visual alert



RH1-SSE-FG    RH1-SSE-HG    RH2-SSE-FG    RH2-SSE-HG    RH3-SSB-FG    RH3-SSB-HG

<b>Interior Storage Capacity</b>	22.3 ft <sup>3</sup>	22.3 ft <sup>3</sup>	48.0 ft <sup>3</sup>	48.0 ft <sup>3</sup>	74.0 ft <sup>3</sup>	73.6 ft <sup>3</sup>
<b>Overall Width</b>	27.5"	27.5"	56"	56"	82.5"	82.5"
<b>Overall Depth</b>	33.6"	33.6"	33.6"	33.6"	33.6"	33.6"
<b>Height (including 4" casters)</b>	82.5"	82.5"	82.5"	82.5"	82.5"	82.5"
<b>Depth with doors open at 90°</b>	58.5"	58.5"	58.5"	58.5"	58.5"	58.5"
<b>Interior Door opening width</b>	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
<b>Interior Door opening height</b>	59.25"	26.75"	59.25"	26.75"	59.25"	26.75"
<b>Adjustable Shelves</b>	3	3	6	6	9	9
<b>Center Shelves</b>	N/A	N/A	3	3	6	6
<b>Shelf Dimensions (W x D)</b>	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"
<b>Crated Shipping Weight</b>	400 lbs.	400 lbs.	625 lbs.	625 lbs.	825 lbs.	825 lbs.
<b>Crated Height</b>	85"	85"	85"	85"	85"	85"
<b>Crated Width</b>	32"	32"	59"	59"	87"	87"
<b>Crated Depth</b>	38"	38"	38"	38"	38"	38"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	4.3	4.3	6.0	6.0	11.8	14.0
<b>HACR Breaker</b>	15.0	15.0	15.0	15.0	20.0	20.0
<b>Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	3.7	3.0	5.6	3.9	3.7	5.6
<b>Heat Rejection (BTU / hr)</b>	655	655	981	981	2,080	2,080
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Control Set Point Range</b>	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F
<b>Refrigerant</b>	R-404A	R-404A	R-404A	R-404A	R-404A	R-404A

\*RH2-SSE-FG, RH2-SSE-HG and RH3-SSB-FG are ENERGY STAR qualified.

\*Based on 100°F ambient cycling at set point

# REACH-IN SERIES



## PROFESSIONAL SERIES

### FREEZERS

- Stainless steel interior and exterior
- Ducted air distribution system for uniform cabinet temperature eliminating "hot spots"
- Cabinet and doors are foamed with R-134A CFC-free polyurethane foam
- Doors are constructed of high grade stainless steel
- EverCheck® controls with audio and visual alert



FHI-SSB

FHI-SSB-HD

FH2-SSB

FH2-SSB-HD

	FHI-SSB	FHI-SSB-HD	FH2-SSB	FH2-SSB-HD
<b>Interior Storage Capacity</b>	22.3 ft <sup>3</sup>	22.3 ft <sup>3</sup>	48.0 ft <sup>3</sup>	48.0 ft <sup>3</sup>
<b>Overall Width</b>	27.5"	27.5"	55"	55"
<b>Overall Depth</b>	33.6"	33.6"	33.6"	33.6"
<b>Height (including 4" casters)</b>	82.5"	82.5"	82.5"	82.5"
<b>Depth with doors open at 90°</b>	58.5"	58.5"	58.5"	58.5"
<b>Interior Door opening width</b>	21.75"	21.75"	21.75"	21.75"
<b>Interior Door opening height</b>	59.25"	26.75"	59.25"	26.75"
<b>Adjustable Shelves</b>	3	3	6	6
<b>Center Shelves</b>	N/A	N/A	3	3
<b>Shelf Dimensions (W x D)</b>	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"
<b>Crated Shipping Weight</b>	400 lbs.	400 lbs.	650 lbs.	650 lbs.
<b>Crated Height</b>	85"	85"	85"	85"
<b>Crated Width</b>	32"	32"	59"	59"
<b>Crated Depth</b>	38"	38"	38"	38"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	11.0	11.0	15.5	15.5
<b>HACR Breaker</b>	15.0	15.0	20.0	20.0
<b>Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	9.0	9.7	15.9	17.4
<b>Heat Rejection (BTU / hr)</b>	2100	2100	3415	3415
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Control Set Point Range</b>	-10° - +25°F	-10° - +25°F	-10° - +25°F	-10° - +25°F
<b>Refrigerant</b>	R-404A	R-404A	R-404A	R-404A

\*Based on 100°F ambient cycling at set point



# REACH-IN SERIES

## PROFESSIONAL SERIES - DUAL TEMPS

### REFRIGERATORS and FREEZERS

- Stainless steel interior and exterior
- Ducted air distribution system for uniform cabinet temperature eliminating "hot spots"
- Cabinet and doors are foamed with R-134A CFC-free polyurethane foam
- Doors are constructed of high grade stainless steel
- EverCheck® controls with audio and visual alert



RFH1-SSB-HSE      RFH2-SSB      RFH2-SSB-HD      RFH3-SSB      RFH3-SSB-HD

<b>Interior Storage Capacity (ea. section)</b>	Ref 9.1 ft <sup>3</sup> Frz 10.5 ft <sup>3</sup>	22.3 ft <sup>3</sup>	22.3 ft <sup>3</sup>	Ref 48.0 ft <sup>3</sup> Frz 22.3 ft <sup>3</sup>	Ref 48.0 ft <sup>3</sup> Frz 22.3 ft <sup>3</sup>
<b>Overall Width</b>	27.5"	55"	55"	82.5"	82.5"
<b>Overall Depth</b>	33.6"	33.6"	33.6"	33.6"	33.6"
<b>Height (including 4" casters)</b>	78"	82.5"	82.5"	82.5"	82.5"
<b>Depth with doors open at 90°</b>	58.5"	58.5"	58.5"	58.5"	58.5"
<b>Interior Door opening width</b>	21.75"	21.75"	21.75"	21.75"	21.75"
<b>Interior Door opening height</b>	26.75"	59.25"	26.75"	59.25"	26.75"
<b>Adjustable Shelves</b>	3	6 (3 ea.)	6 (3 ea.)	Ref 6 / Frz 3	Ref 6 / Frz 3
<b>Center Shelves</b>	N/A	N/A	N/A	Ref 3 / Frz 0	Ref 3 / Frz 0
<b>Shelf Dimensions (W x D)</b>	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"
<b>Crated Shipping Weight</b>	490 lbs.	750 lbs.	750 lbs.	992 lbs.	992 lbs.
<b>Crated Height</b>	85"	85"	85"	85"	85"
<b>Crated Width</b>	32"	59"	59"	87"	87"
<b>Crated Depth</b>	38"	38"	38"	38"	38"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	9.5	17**	17**	20.6**	20.6**
<b>HACR Breaker</b>	15.0	20.0	20.0	30.0	30.0
<b>Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	10.0	12.9	13.5	17.1	16.6
<b>Heat Rejection (BTU / hr)</b>	1630	2580	2580	3035	3035
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Control Set Point Range</b>	Ref 36° - 50°F Frz -10° - +25°F	Ref 36° - 50°F Frz -10° - +25°F	Ref 36° - 50°F Frz -10° - +25°F	Ref 36° - 50°F Frz -10° - +25°F	Ref 36° - 50°F Frz -10° - +25°F
<b>Refrigerant</b>	Ref R-134A \ Frz R-404A	Ref R-134A \ Frz R-404A	Ref R-134A \ Frz R-404A	Ref R-134A \ Frz R-404A	Ref R-134A \ Frz R-404A

\*\*Based on 100°F ambient cycling at set point

\*\*For reference only

# REACH-IN SERIES



## PROFESSIONAL SERIES - PASS THRU'S

### REFRIGERATORS

- Stainless steel interior and exterior
- Ducted air distribution system for uniform cabinet temperature eliminating "hot spots"
- Cabinet walls (and Solid Door models) are foamed with R-134A CFC-free polyurethane foam
- Double pane heated glass doors
- Cylinder door locks standard
- EverCheck® controls with audio and visual alert



PTRISSE-HGHS

PTRISSE-FGFG

PTRISSE-HGHG

PTRISSE-FSFS

PTRISSE-HSHS

	PTRISSE-HGHS	PTRISSE-FGFG	PTRISSE-HGHG	PTRISSE-FSFS	PTRISSE-HSHS
<b>Interior Storage Capacity</b>	23.8 ft <sup>3</sup>	23.8 ft <sup>3</sup>	23.8 ft <sup>3</sup>	23.8 ft <sup>3</sup>	23.8 ft <sup>3</sup>
<b>Overall Width</b>	27.5"	27.5"	27.5"	27.5"	27.5"
<b>Overall Depth</b>	35.9"	35.9"	35.9"	35.9"	35.9"
<b>Height (including 4" casters)</b>	82.5"	82.5"	82.5"	82.5"	82.5"
<b>Depth with doors open at 90°</b>	85.1"	84.7"	84.7"	85.9"	85.9"
<b>Interior Door opening width</b>	21.75"	21.75"	21.75"	21.75"	21.75"
<b>Interior Door opening height</b>	26.75"	59.25"	26.75"	59.25"	26.75"
<b>Adjustable Shelves</b>	3	3	3	3	3
<b>Center Shelves</b>	N/A	N/A	N/A	N/A	N/A
<b>Shelf Dimensions (W x D)</b>	21.2" x 30.75"	21.2" x 30.75"	21.2" x 30.75"	21.2" x 30.75"	21.2" x 30.75"
<b>Crated Shipping Weight</b>	475 lbs.	475 lbs.	475 lbs.	475 lbs.	475 lbs.
<b>Crated Height</b>	85"	85"	85"	85"	85"
<b>Crated Width</b>	32"	32"	32"	32"	32"
<b>Crated Depth</b>	38"	38"	38"	38"	38"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	12.0	12.0	12.0	12.0	12.0
<b>HACR Breaker</b>	15.0	15.0	15.0	15.0	15.0
<b>Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	4.5	4.4	4.5	4.2	4.2
<b>Heat Rejection (BTU / hr)</b>	2273	2630	2630	1700	1700
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Control Set Point Range</b>	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F
<b>Refrigerant</b>	R-404A	R-404A	R-404A	R-404A	R-404A

\*Based on 100°F ambient cycling at set point





# REACH-IN SERIES

## PROFESSIONAL SERIES - PASS THRU

### REFRIGERATORS

- Stainless steel interior and exterior
- Ducted air distribution system for uniform cabinet temperature eliminating "hot spots"
- Cabinet and doors are foamed with R-134A CFC-free polyurethane foam
- Doors are constructed of high grade stainless steel
- Door glass is triple pane, argon filled with Low-E non-reflective coating
- EverCheck® controls with audio and visual alert



PTR2SSB-FGFG

PTR2SSB-HGHG

PTR2SSE-FSFS

PTR2SSE-HSHS

<b>Interior Storage Capacity</b>	51.3 ft <sup>3</sup>	51.3 ft <sup>3</sup>	51.3 ft <sup>3</sup>	51.3 ft <sup>3</sup>
<b>Overall Width</b>	55"	55"	55"	55"
<b>Overall Depth</b>	35.9"	35.9"	35.9"	35.9"
<b>Height (including 6" adj. legs)</b>	84.5"	84.5"	84.5"	84.5"
<b>Depth with doors open at 90°</b>	85.9"	85.9"	85.9"	85.9"
<b>Interior Door opening width</b>	21.75"	21.75"	21.75"	21.75"
<b>Interior Door opening height</b>	59.25"	26.75"	59.25"	26.75"
<b>Adjustable Shelves</b>	6	6	6	6
<b>Center Shelves</b>	3	3	3	3
<b>Shelf Dimensions (W x D)</b>	21.2" x 30.75"	21.2" x 30.75"	21.2" x 30.75"	21.2" x 30.75"
<b>Crated Shipping Weight</b>	700 lbs.	700 lbs.	700 lbs.	700 lbs.
<b>Crated Height</b>	85"	85"	85"	85"
<b>Crated Width</b>	59"	59"	59"	59"
<b>Crated Depth</b>	39"	39"	39"	39"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	12.0	12.0	12.0	12.0
<b>HACR Breaker</b>	15.0	15.0	15.0	15.0
<b>Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	16.6	16.6	6.3	6.3
<b>Heat Rejection (BTU / hr)</b>	2360	2360	2360	2360
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Control Set Point Range</b>	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F
<b>Refrigerant</b>	R-404A	R-404A	R-404A	R-404A

\*Based on 100°F ambient cycling at set point

# REACH-IN SERIES



## PROFESSIONAL SERIES - ROLL-INS

### REFRIGERATORS

- Stainless steel interior and exterior
- Ducted air distribution system for uniform cabinet temperature even when full
- Cabinet and doors are foamed with R-134A CFC-free polyurethane foam
- Doors are constructed of high grade stainless steel
- Stainless steel ramp and interior rack guides allows rack to roll easily
- EverCheck® controls with audio and visual alert



**RIR1-SSB**



**RIR2-SSB**

<b>Interior Storage Capacity</b>	37.7 ft <sup>3</sup>	77.3 ft <sup>3</sup>
<b>Overall Width</b>	35"	68"
<b>Overall Depth (including 4" for Ramp)</b>	38.4"	38.4"
<b>Height</b>	90.5"	90.5"
<b>Depth with doors open at 90°</b>	65"	65"
<b>Door opening width</b>	29.4"	29.4"
<b>Door opening height</b>	72.8"	72.8"
<b>Adjustable Shelves</b>	N/A	N/A
<b>Center Shelves</b>	N/A	N/A
<b>Maximum Rack Size (WxDxH) (Rack by others)</b>	27" x 29" x 72"	27" x 29" x 72"
<b>Crated Shipping Weight</b>	500 lbs.	825 lbs.
<b>Crated Height</b>	95.4"	95.4"
<b>Crated Width</b>	39"	72"
<b>Crated Depth</b>	40.75"	40.75"
<b>Voltage</b>	115V/60/1	115V/60/1
<b>Amperage</b>	7.0	7.0
<b>HACR Breaker</b>	15.0	15.0
<b>Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	5.5	8.30
<b>Heat Rejection (BTU / hr)</b>	1135	1717
<b>Voltage Range</b>	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F
<b>Control Set Point Range</b>	+36° - +50°F	+36° - +50°F
<b>Refrigerant</b>	R-404A	R-404A

\*Based on 100°F ambient cycling at set point



# REACH-IN SERIES

## PROFESSIONAL SERIES - HOT FOOD HOLDING CABINET

### HOT FOOD HOLDING CABINET

- Stainless steel interior and exterior
- Innovative ducted air distribution system eliminates hot and cold spots in cabinet
- High density fiberglass insulation in cabinet top, sides, back, bottom and doors
- Universal tray slides (13 sets) standard
- Easy to use LED digital controller (fahrenheit or celsius) with separate on/off switch, high/low temperature alarms
- Self closing all stainless steel doors with locks



HHI-SSB-FS



HHI-SSB-HS

<b>Interior Storage Capacity</b>	24.9 ft <sup>3</sup>	24.9 ft <sup>3</sup>
<b>Overall Width</b>	27.5"	27.5"
<b>Overall Depth</b>	33.75"	33.75"
<b>Height</b> (including 5" casters)	84.5"	84.5"
<b>Depth with doors open at 90°</b>	58.6"	58.6"
<b>Door Opening Width</b>	22"	22"
<b>Door Opening Height</b>	27"	27"
<b>Tray Slides</b>	13 Sets	13 Sets
<b>Crated Shipping Weight</b>	475 lbs.	475 lbs.
<b>Crated Height</b>	85"	85"
<b>Crated Width</b>	32"	32"
<b>Crated Depth</b>	38"	38"
<b>Voltage</b>	115V/60/1	115V/60/1
<b>Amperage</b>	14.2	14.2
<b>HACR Breaker</b>	20.0	20.0
<b>*Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	11.08	11.08
<b>*Heat Rejection (BTU / hr)</b>	N/A	N/A
<b>Voltage Range</b>	110 - 120	110 - 120
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F
<b>Control Set Point Range</b>	90° - 190°F	90° - 190°F

\*Based on 100°F ambient cycling at set point

# REACH-IN SERIES



## PROFESSIONAL SERIES - UNDERCOUNTERS

### REFRIGERATORS

- Stainless steel interior and exterior top, front, sides and bottom - galvanized back
- Removable cartridge style refrigeration system
- Cabinet and doors are foamed with CFC-free polyurethane foam
- Doors and drawer fronts are constructed of high-grade stainless steel inside and out
- EverCheck® controls
- 4" Heavy duty casters standard



	HUR40A	HUR68A	HUR96A	HUR40A-D	HUR68A-D	HUR96A-D
<b>Interior Storage Capacity</b>	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>	29.1 ft <sup>3</sup>	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>	29.1 ft <sup>3</sup>
<b>Overall Width</b>	40.25"	68"	95.8"	40.25"	68"	95.8"
<b>Overall Depth</b>	32.3"	32.3"	32.3"	32.3"	32.3"	32.3"
<b>Height (including 4" casters)</b>	33.9"	33.9"	33.9"	33.9"	33.9"	33.9"
<b>Depth with doors open at 90° -OR- drawers fully open</b>	56.8"	56.8"	56.8"	58.1"	58.1"	58.1"
<b>Interior Door opening width</b>	22.5"	22.5"	22.5"	N/A	N/A	N/A
<b>Interior Door opening height</b>	24.3"	24.3"	24.3"	9.9"	9.9"	9.9"
<b>Adjustable Shelves</b>	2	4	6	N/A	N/A	N/A
<b>Center Shelves</b>	N/A	N/A	N/A	N/A	N/A	N/A
<b>Shelf Dimensions (W x D)</b>	22.4" x 24.6"	25" x 24.6"	25.9" x 24.6"	N/A	N/A	N/A
<b>Crated Shipping Weight</b>	312 lbs.	435 lbs.	558 lbs.	375 lbs.	546 lbs.	725 lbs.
<b>Crated Height</b>	39.5"	39.5"	39.5"	39.5"	39.5"	39.5"
<b>Crated Width</b>	44.25"	72"	99.8"	44.25"	72"	99.8"
<b>Crated Depth</b>	36.25"	36.25"	36.25"	36.25"	36.25"	36.25"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	5.0	4.8	6.0	5.0	5.0	6.0
<b>HACR Breaker</b>	15.0	15.0	15.0	15.0	15.0	15.0
<b>Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	2.4	2.8	4.5	3.2	4.9	6.0
<b>Heat Rejection (BTU / hr)</b>	449	638	740	449	695	740
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Control Set Point Range</b>	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F
<b>Refrigerant</b>	R-134a	R-134a	R-134a	R-134a	R-134a	R-134a

\*Based on 100°F ambient cycling at set point



# REACH-IN SERIES

## PROFESSIONAL SERIES - UNDERCOUNTERS

### FREEZERS

- Stainless steel interior and exterior top, front, sides and bottom - galvanized back
- Removable cartridge style refrigeration system
- Cabinet and doors are foamed with CFC-free polyurethane foam
- Doors and drawer fronts are constructed of high-grade 300 Series stainless steel inside and out
- EverCheck® controls
- 4" Heavy duty casters standard


**HUF40A**

**HUF68A**

**HUF40A-D**

**HUF68A-D**

<b>Interior Storage Capacity</b>	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>
<b>Overall Width</b>	40.25"	68"	40.25"	68"
<b>Overall Depth</b>	32.3"	32.3"	32.3"	32.3"
<b>Height (including 4" casters)</b>	33.9"	33.9"	33.9"	33.9"
<b>Depth with doors open at 90° -OR- drawers fully open</b>	56.8"	56.8"	58.1"	58.1"
<b>Interior Door opening width</b>	22.5"	22.5"	N/A	N/A
<b>Interior Door opening height</b>	24.3"	24.3"	9.9"	9.9"
<b>Adjustable Shelves</b>	2	4	N/A	N/A
<b>Center Shelves</b>	N/A	N/A	N/A	N/A
<b>Shelf Dimensions (W x D)</b>	22.4" x 24.6"	25" x 24.6"	N/A	N/A
<b>Crated Shipping Weight</b>	317 lbs.	442 lbs.	375 lbs.	553 lbs.
<b>Crated Height</b>	39.5"	39.5"	39.5"	39.5"
<b>Crated Width</b>	44.25"	72"	44.25"	72"
<b>Crated Depth</b>	36.25"	36.25"	36.25"	36.25"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	5.5	10.0	5.5	10.0
<b>HACR Breaker</b>	15.0	15.0	15.0	15.0
<b>Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	5.0	9.5	8.9	14.8
<b>Heat Rejection (BTU / hr)</b>	1133	1708	1267	1791
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Control Set Point Range</b>	-13° - +19°F	-13° - +19°F	-13° - +19°F	-13° - +19°F
<b>Refrigerant</b>	R-404A	R-404A	R-404A	R-404A

\*Based on 100°F ambient cycling at set point

# REACH-IN SERIES



## PROFESSIONAL SERIES - WORKTOPS

### REFRIGERATORS

- Stainless steel interior and exterior top, front, sides and bottom - galvanized back
- Top includes 4" backsplash
- Removable cartridge style refrigeration system
- Cabinet and doors are foamed with CFC-free polyurethane foam
- Doors and drawer fronts are constructed of high-grade stainless steel inside and out
- EverCheck® controls
- 6" Heavy duty casters standard



HWR40A

HWR68A

HWR96A

HWR40A-D

HWR68A-D

HWR96A-D

	HWR40A	HWR68A	HWR96A	HWR40A-D	HWR68A-D	HWR96A-D
<b>Interior Storage Capacity</b>	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>	29.1 ft <sup>3</sup>	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>	29.1 ft <sup>3</sup>
<b>Overall Width</b>	40.25"	68"	95.8"	40.25"	68"	95.8"
<b>Overall Depth</b>	32.3"	32.3"	32.3"	32.3"	32.3"	32.3"
<b>Height (including 6" casters)</b>	39.9"	39.9"	39.9"	39.9"	39.9"	39.9"
<b>Depth with doors open at 90° -OR- drawers fully open</b>	56.8"	56.8"	56.8"	58.1"	58.1"	58.1"
<b>Interior Door opening width</b>	22.5"	22.5"	22.5"	N/A	N/A	N/A"
<b>Interior Door opening height</b>	24.3"	24.3"	24.3"	9.9"	9.9"	9.9"
<b>Adjustable Shelves</b>	2	4	6	N/A	N/A	N/A
<b>Center Shelves</b>	N/A	N/A	N/A	N/A	N/A	N/A
<b>Shelf Dimensions (W x D)</b>	22.4" x 24.6"	25" x 24.6"	25.9" x 24.6"	N/A	N/A	N/A
<b>Crated Shipping Weight</b>	317 lbs.	443 lbs.	561 lbs.	375 lbs.	554 lbs.	734 lbs.
<b>Crated Height</b>	43.25"	43.25"	43.25"	43.25"	43.25"	43.25"
<b>Crated Width</b>	44.25"	72"	99.8"	44.25"	72"	99.8"
<b>Crated Depth</b>	36.25"	36.25"	36.25"	36.25"	36.25"	36.25"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	5.0	5.0	6.0	5.0	5.0	6.0
<b>HACR Breaker</b>	15.0	15.0	15.0	15.0	15.0	15.0
<b>Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	2.4	2.8	4.5	3.2	4.9	6.0
<b>Heat Rejection (BTU / hr)</b>	449	638	740	449	695	852
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Control Set Point Range</b>	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F
<b>Refrigerant</b>	R-134a	R-134a	R-134a	R-134a	R-134a	R-134a

\*Based on 100°F ambient cycling at set point



# REACH-IN SERIES

## PROFESSIONAL SERIES - WORKTOPS

### FREEZERS

- Stainless steel interior and exterior top, front, sides and bottom - galvanized back
- Top includes 4" backsplash
- Removable cartridge style refrigeration system
- Cabinet and doors are foamed with CFC-free polyurethane foam
- Doors and drawer fronts are constructed of high-grade 300 Series stainless steel inside and out
- EverCheck® controls
- 6" Heavy duty casters standard


**HWF40A**

**HWF68A**

**HWF40A-D**

**HWF68A-D**

<b>Interior Storage Capacity</b>	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>
<b>Overall Width</b>	40.25"	68"	40.25"	68"
<b>Overall Depth</b>	32.3"	32.3"	32.3"	32.3"
<b>Height (including 6" casters)</b>	39.9"	39.9"	39.9"	39.9"
<b>Depth with doors open at 90° -OR- drawers fully open</b>	56.8"	56.8"	58.1"	58.1"
<b>Interior Door opening width</b>	22.5"	22.5"	N/A	N/A
<b>Interior Door opening height</b>	24.3"	24.3"	9.9"	9.9"
<b>Adjustable Shelves</b>	2	4	N/A	N/A
<b>Center Shelves</b>	N/A	N/A	N/A	N/A
<b>Shelf Dimensions (W x D)</b>	22.4" x 24.6"	25" x 24.6"	N/A	N/A
<b>Crated Shipping Weight</b>	322 lbs.	450 lbs.	380 lbs.	561 lbs.
<b>Crated Height</b>	43.25"	43.25"	43.25"	43.25"
<b>Crated Width</b>	44.25"	72"	44.25"	72"
<b>Crated Depth</b>	36.25"	36.25"	36.25"	36.25"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	5.5	10.0	5.5	10.0
<b>HACR Breaker</b>	15.0	15.0	15.0	15.0
<b>Energy Consumption (kwh / day) ENERGY STAR / DOE</b>	5.0	9.5	8.9	14.8
<b>Heat Rejection (BTU / hr)</b>	1133	1708	1267	1791
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Control Set Point Range</b>	-13° - +19°F	-13° - +19°F	-13° - +19°F	-13° - +19°F
<b>Refrigerant</b>	R-404A	R-404A	R-404A	R-404A

\*Based on 100°F ambient cycling at set point

# REACH-IN SERIES



## PROFESSIONAL SERIES - PREP TABLES

### REFRIGERATORS

- Stainless steel interior and exterior top, front, sides and bottom - galvanized back
- Refrigerated rails is mechanically cooled and is equipped with a 1" drain
- Exclusive "Night Switch" control setting allows over night product storage in rail with cover closed
- Doors are constructed of high-grade stainless steel inside and out
- Drawer fronts are constructed of high-grade stainless steel inside and out
- EverCheck® controls
- 4" Heavy duty casters standard



HPR46A



HPR72A



HPR46A-D



HPR72A-D

Interior Storage Capacity	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>
Overall Width	46"	72"	46"	72"
Overall Depth	32.3"	32.3"	32.3"	32.3"
Height (including 4" casters)	44.8"	44.8"	44.8"	44.8"
Depth with doors open at 90° / Depth with drawer fully open (-D)	56.8"	56.8"	58.1"	58.1"
Door opening width	22.5"	22.5"	22.5"	22.5"
Door opening height / Drawer opening height (-D)	24.3"	24.3"	9.9"	9.9"
Adjustable Shelves	1	2	N/A	N/A
Shelf Dimensions (W x D)	22.4" x 24.6"	22.4" x 24.6"	N/A	N/A
Crated Shipping Weight	373 lbs.	585 lbs.	431 lbs.	696 lbs.
Crated Height	51.8"	51.8"	51.8"	51.8"
Crated Width	50"	76"	50"	76"
Crated Depth	36.25"	36.25"	36.25"	36.25"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	7.6	13.6	7.6	13.6
HACR Breaker	15.0	20.0	15.0	20.0
Energy Consumption (kwh / day) ENERGY STAR / DOE	7.3	13.9	7.3	16
Heat Rejection (BTU / hr)	1044	1976	1043.5	2275
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 86°F	45° - 86°F	45° - 86°F	45° - 86°F
Control Set Point Range (Base)	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F
Control Set Point Range (Rail)	-13° - +53°F	-13° - +53°F	-13° - +53°F	-13° - +53°F
Refrigerant	R-404A	R-404A	R-404A	R-404A

\*Based on 86°F ambient cycling at set point





# OPTIONS & ACCESSORIES

## FOR REACH-INS

### CASTERS

- Equipped w/ Front Locking Brakes




### FOOT PEDAL DOOR OPENER

- For Hands Free Operation




### SHELVES

- Stainless Steel Shelf
- Epoxy Coated Shelf




### CENTER SHELVES

- Stainless Steel Shelf
- Epoxy Coated Shelf



### TRAY / PAN SLIDES

- 16 max recommendation per section
- Universal size accommodates:  
**Baker Pans:** width 17 7/8" to 18"  
length 25 3/4" to 26"  
**Hotel Pans:** width 12 7/8" to 13"  
length 20 3/4" to 20 7/8"



### MISCELLANEOUS RAISED RAIL

- Adapter Rail
- Cutting Boards

### SECURITY

- Padlock Hasp for 1 and 2 Section Reach-Ins
- Correctional Facility Packages Available

### PROFESSIONAL SERIES DOOR REVERSAL KIT

- Full Door Kit
- Half Door Kit

### COMMERCIAL SERIES DOOR REVERSAL KIT

- Full Door Kit
- Half Door Kit

### MISCELLANEOUS - UNDERCOUNTER

- Stainless Steel Back
- Double Sided Bull Nose Worktop

### MISCELLANEOUS - WORKTOP

- Stainless Steel Back
- Double Sided Bull Nose Worktop

### MISCELLANEOUS - PROFESSIONAL SERIES UPRIGHTS

- Remote Monitoring Control Board (for NAFEM Data Protocol)

# WARRANTIES



### KM CUBER / IM CUBER / DKM ICE MACHINE & DISPENSER and HOTEL / MOTEL DISPENSING BINS

Three Year	Parts & Labor on entire machine
Five Year	Parts & Labor on: Evaporator
Five Year	Parts on: Compressor; air-cooled condenser

### AM-50 CUBER and C-101 FLAKERS

Two Year	Parts & Labor on entire machine
----------	---------------------------------

### FLAKERS and CUBELET ICE MACHINES

Three Year	Parts & Labor on entire machine*
	* (Serial numbers Vxxxxxj and after.)
Five Year	Parts on: Compressor; air-cooled condenser

### DCM / DT SANITARY CUBELET ICEMAKER / DISPENSER

Three Year	Parts & Labor on entire machine
Five Year	Parts on: Compressor; air-cooled condenser

### DM ICE DISPENSER

Two Year	Parts & Labor on entire dispenser
----------	-----------------------------------

### BINS

Two Year	Parts & Labor on slope front bins (Production prior to Jan. 2012) & DM
Three Year	Parts & Labor on slope front bins (Jan. 2012 production and after)
Five Year	Parts & Labor on large upright models

### COUNTERTOP REFRIGERATED DISPLAY CASES

One Year	Parts & Labor on entire unit
Two Year	Parts & Labor on: Compressor, evaporator, air-cooled condenser
Five Year	Parts on: Compressor; air-cooled condenser

### REMOTE CONDENSERS

<b>Cubers: Three Year</b>	Parts & Labor on entire machine
<b>Five Year</b>	Parts & Labor: Air-cooled condenser coil
<b>Flakers: Three Year</b>	Parts & Labor on entire machine
<b>Five Year</b>	Parts on: Air-cooled condenser coil

### REACH-IN WARRANTY

Three Year	Parts & Labor on entire machine
Five Year	Parts on: Compressor - Additional warranties available



## HOSHIZAKI AMERICA, INC.

618 Hwy. 74, South  
Peachtree City, GA 30269  
TEL 800-438-6087 | (770) 487-2331  
FAX 800-345-1325 | (770) 487-1325  
[www.hoshizakiamerica.com](http://www.hoshizakiamerica.com)

“A Superior Degree of Reliability”

©2015 Hoshizaki America, Inc.

Item #40067 | 1/26/2015