

SUSHI CASES



PREP TABLES



EQUIPMENT STANDS



REFRIGERATORS



FREEZERS



# 2016

REFRIGERATION PRICE GUIDE

EFFECTIVE: February 1, 2016



“A SUPERIOR DEGREE OF RELIABILITY”

[hoshizakiamerica.com](http://hoshizakiamerica.com)





## TABLE OF CONTENTS

---

<b>REFRIGERATION SERIES</b>	2
<b>REFRIGERATION MODEL CODE</b>	4-5
<b>COMMERCIAL SERIES</b>	6
Upright Refrigerators & Freezers	6-9
Compact Undercounter Refrigerator	10
Undercounter Refrigerators & Freezers	11-12
Undercounter Refrigerators & Freezer with Drawers	13-14
Worktop Refrigerators & Freezers	15-16
Worktop Refrigerators & Freezer with Drawers	17-18
Prep Tables - Sandwich Top Refrigerators	19
Prep Tables - Sandwich Top Refrigerators with Drawers	20
Prep Tables - Mega Top Refrigerators	21
Prep Tables - Mega Top Refrigerators with Drawers	22
Prep Tables - Pizza Refrigerators	23
Prep Tables - Pizza Refrigerators with Drawers	24
<b>REFRIGERATED EQUIPMENT STAND</b>	
Low-Profile Refrigerated Equipment Stand	25
<b>PROFESSIONAL SERIES</b>	26
Upright Refrigerators & Freezers	26-28
Upright Dual Temps	29
Upright Pass Thrus	30-31
Upright Roll-Ins	32
Upright Hot Food Holding Cabinets	33
Undercounter Refrigerators & Freezers	34-35
Worktop Refrigerators & Freezers	36-37
Prep Tables	38
<b>SUSHI CASES</b>	39
<b>REFRIGERATION ACCESSORIES</b>	40-43

Terms and Conditions  
Specifications are subject to change without notice.  
All rights reserved by Hoshizaki America, Inc.

## CORPORATE VISION

**Hoshizaki** is a name synonymous with quality, innovation and reliability. These values exist through the vision of our leadership and focus on our teamwork... developing quality relationships with our employees, suppliers, distributors, dealers, designers, and service providers. Together, we positively impact the users of our products and the communities in which we live.



## CORPORATE LOCATIONS

**Hoshizaki America, Inc.**, with corporate headquarters in Peachtree City, Georgia, and a second manufacturing facility in Griffin, Georgia, operates some of the most automated production facilities in the industry. Using state-of-the-art technology, every Hoshizaki unit is run-tested at the factory, and undergoes rigorous quality performance tests. Hoshizaki America offers advanced seminars at our headquarters and basic training programs which are scheduled across the country for both service representatives and customers.

Griffin, GA



Peachtree City, GA

## DID YOU KNOW?

- **HOSHIZAKI** is the world's largest manufacturer of commercial ice equipment, employing over 10,000 people.
- **HOSHIZAKI** is the world's largest manufacturer of commercial refrigerated food service equipment with sales of over \$2 billion serving customers in 75 nations.
- **HOSHIZAKI** operates plants worldwide including two in the USA, three in Japan, one in England, China, Australia and Mexico.
- **HOSHIZAKI** operates sales offices worldwide with distribution throughout 75 nations.
- 47 of the top 50 U.S. food service chains specify and use **HOSHIZAKI** products.
- In expansion to a full-service kitchen equipment company, **HOSHIZAKI** acquired Lancer Corporation in 2006, GRAM Commercial A/S in 2008, both Jackson and Macom in 2013.
- **HOSHIZAKI** is certified in ISO-9001, ISO-14001 and OSHAS-18001:2007 - being the first and only food service equipment manufacturer to achieve ISO-14001.
- In 2015, **HOSHIZAKI** was awarded "Partner Of The Year - Sustained Excellence" by Energy Star.



## REFRIGERATION SERIES

### Features & Benefits

#### Commercial Series Features

- Stainless steel exterior front and sides for long life, durability and easy maintenance
- Stainless steel interior on all upright models
- Energy efficient thermostatic expansion valve self contained refrigeration system
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks
- One piece, full length, extruded aluminum, flush mount door handle maximizes aisle space
- Solid state, digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Larger units are shipped with factory installed stem casters as standard
- 79.63" high, cabinet will go through standard door opening

#### Professional Series Features

- Stainless steel interior and exterior for long life, durability and easy maintenance
- Energy efficient thermostatic expansion valve self contained refrigeration system
- Innovative Variable Speed Compressor with "adaptive control" technology
- **EverCheck™** digital control system with audio alarms
- Rapid temperature cool down and recovery time
- Self-closing stainless steel doors with torsion spring all metal hinges and locks
- Flush mounted door handle maximizes aisle space
- Hinged front panel for easy access to refrigeration system
- Removable, cleanable air filter protects condenser and reduces cleaning

#### Professional and Commercial Series Features

- Unique "ducted" air distribution system, achieves a uniform cabinet temperature even when full
- Cabinets and doors are insulated with 2 3/8" foamed in place polyurethane
- Exclusive "stepped" door design to protect recessed door gasket
- Shelves are adjustable in 1" increments, allowing maximum interior flexibility
- Field reversible doors (with optional kit)
- Enamel coated evaporator coil
- Automatic hot gas condensate disposable system, eliminates need for external drain
- Three year parts and labor warranty



**EFFECTIVE: February 1, 2016**

Supersedes all previous price lists

## TERMS and CONDITIONS

Prices are F.O.B. Factory. All prices and specifications are subject to change without notice. Hoshizaki reserves the right to determine point of shipment.

**TERMS:** Terms are such as the Company may extend to the purchaser.

**LOST OR DAMAGED SHIPMENTS:** Whenever seller shall deliver or cause to be delivered to a common carrier any goods ordered by consignee, whether the particular common carrier shall have been designated in the shipping instructions of the consignee or not, seller shall not be responsible for any delays or damage in shipment and the common carrier to which seller shall deliver goods shipped to the consignee is hereby declared to the agent of the consignee. Therefore it is the responsibility of the consignee to file claim with the carrier for lost or damaged shipments.

## WARRANTY

All units to be free from manufacturing defects, covered by:

### Professional Series® Refrigerators, Freezers & Dual Temps

3-Year - Parts & Labor on entire machine.

5-Year - Parts on Compressor.

### Commercial Series® Refrigerators & Freezers

3-Year - Parts & Labor on entire machine.

5-Year - Parts on Compressor.

### Compact Undercounter Refrigerator - HR24A

3-Year - Parts & Labor on entire machine.

### Countertop Refrigerated Display Cases

1-Year - Parts & Labor on entire machine

2-Year - Parts & Labor on Compressor, Evaporator, Air-Cooled Condenser

5-Year - Parts on Compressor, Air-Cooled Condenser

### Warranty

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories only. Contact Factory for Warranty in other Countries. Refer to manufacturer's full warranty for complete details. Suggested List Prices are intended only as a guide. This does not restrict the price seller may establish due to market conditions.



## AGENCY LISTINGS and MARKS







## REFRIGERATION MODEL NUMBER IDENTIFICATION CODES

### UPRIGHT MODELS

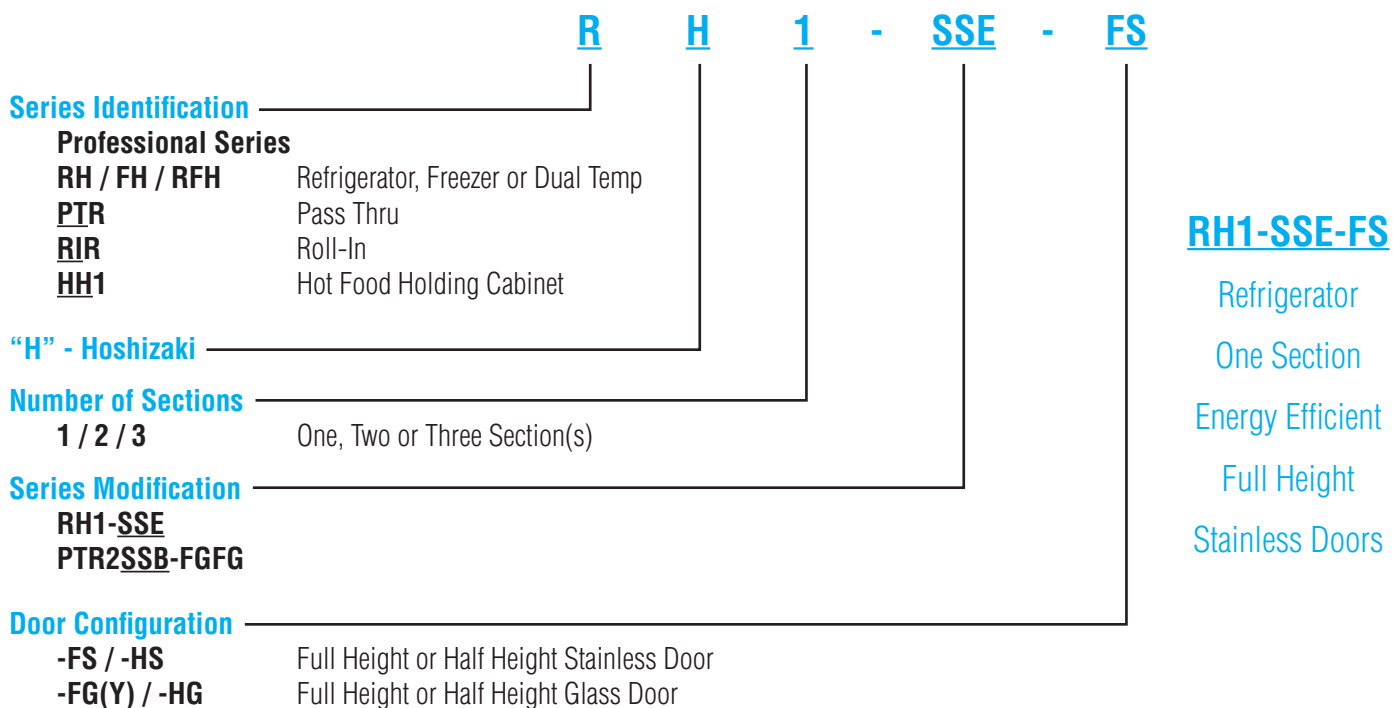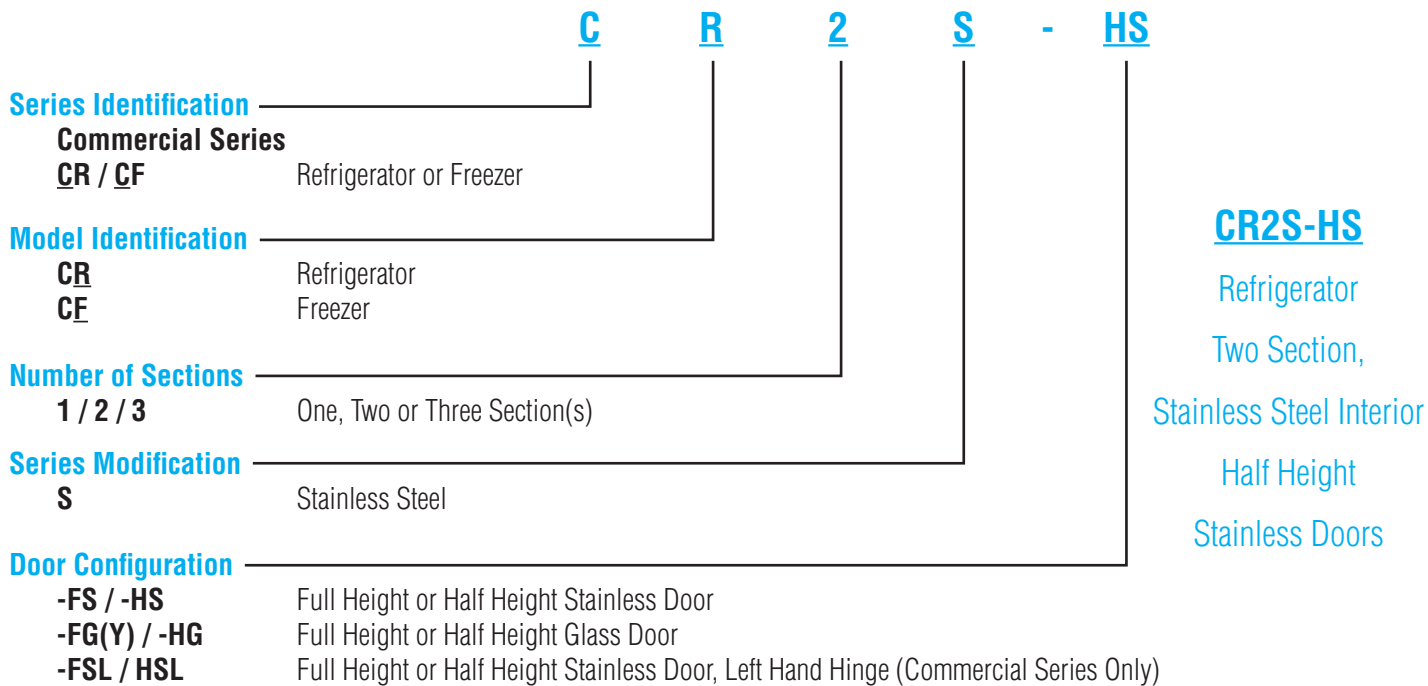

## HORIZONTAL MODELS

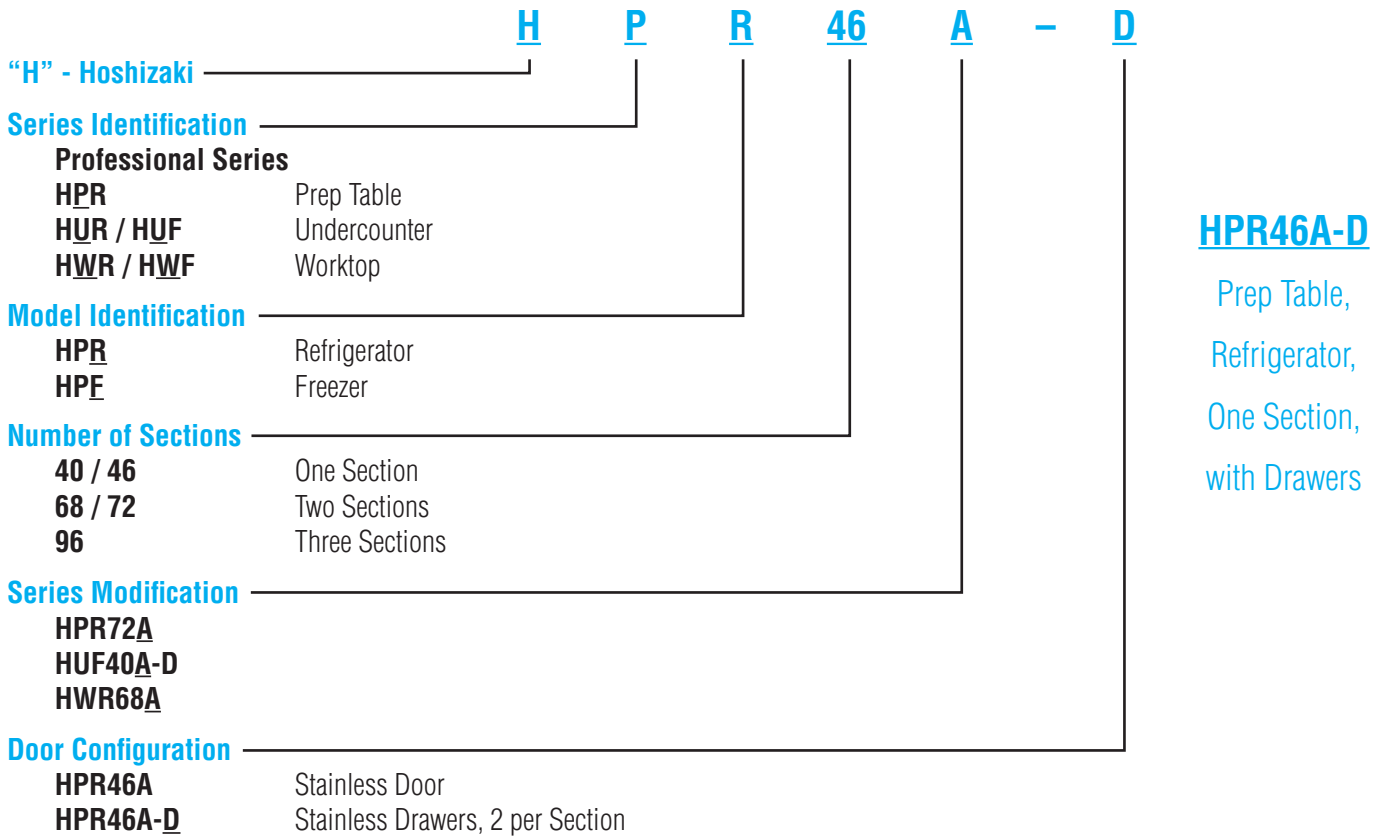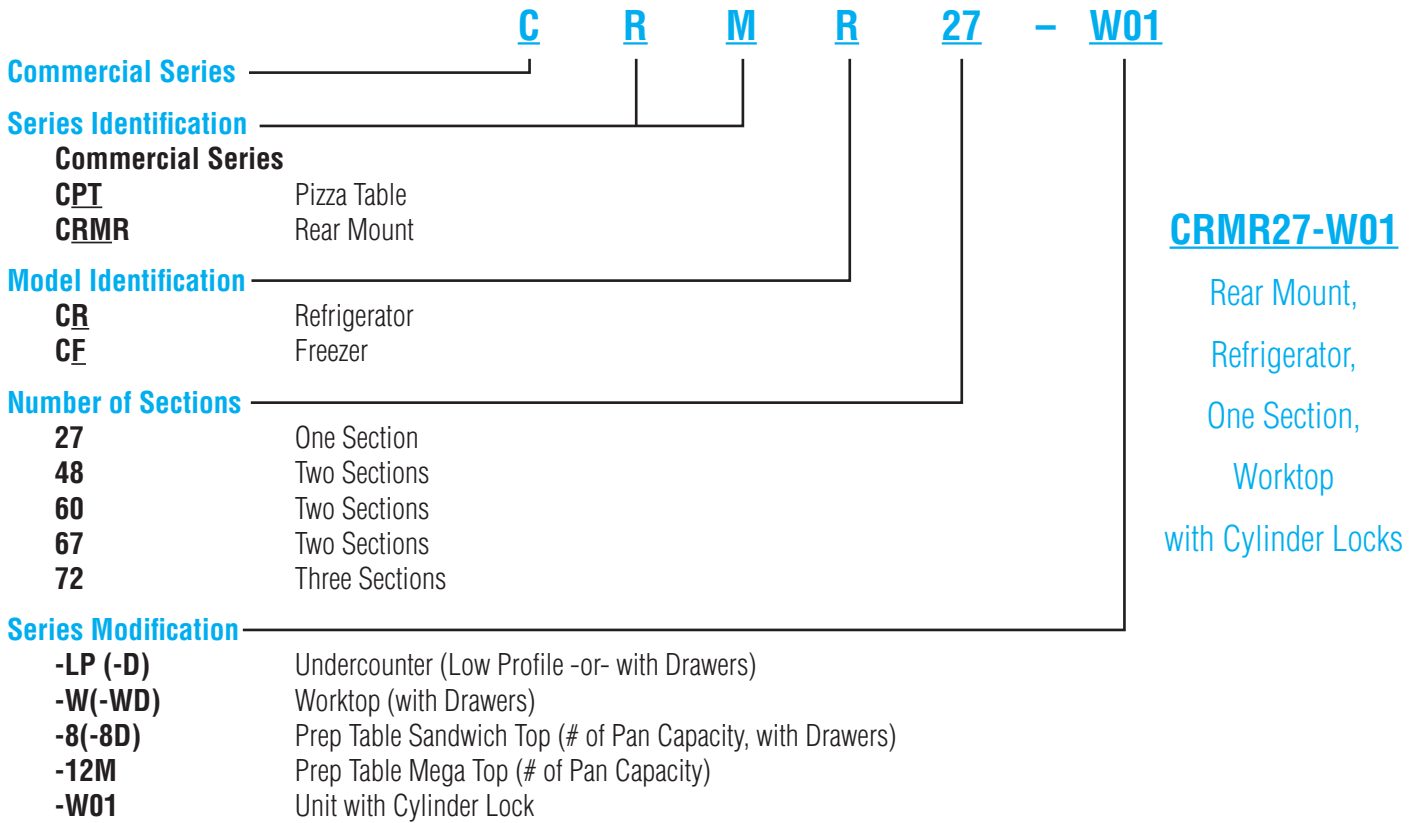



## COMMERCIAL SERIES

## UPRIGHT REFRIGERATORS



CR1S-FS(L)

CR1S-HS(L)  
ENERGY STAR  
Qualified

CR2S-FS  
ENERGY STAR  
Qualified

CR2S-HS

CR3S-FS

CR3S-HS

- Stainless steel exterior front and sides
- Energy efficient thermostatic expansion valve self contained refrigeration system
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks

- Stainless steel interior and door liner
- Cabinet and doors are insulated with 2-3/8" of R-134A CFC-free polyurethane foam
- 4" Heavy duty stem casters standard



Model Number	CR1S-FS(L)	CR1S-HS(L)	CR2S-FS	CR2S-HS	CR3S-FS	CR3S-HS
Nominal Storage Capacity	23.3 ft <sup>3</sup>	23.3 ft <sup>3</sup>	51 ft <sup>3</sup>	51 ft <sup>3</sup>	74.3 ft <sup>3</sup>	74.3 ft <sup>3</sup>
Interior Storage Capacity (CF) (AHAM)	20.9 ft <sup>3</sup>	20.8 ft <sup>3</sup>	47.2 ft <sup>3</sup>	47 ft <sup>3</sup>	68.1 ft <sup>3</sup>	67.8 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 33.75" x 79.75"	27.5" x 33.75" x 79.75"	55" x 33.75" x 79.75"	55" x 33.75" x 79.75"	83" x 33.75" x 79.75"	83" x 33.75" x 79.75"
Depth with doors open at 90°	59.5"	59.5"	59.5"	59.5"	59.5"	59.5"
Interior Door opening width	22"	22"	22"	22"	22"	22"
Interior Door opening height	59.25"	27.75"	59.25"	27.75"	59.25"	27.75"
Adjustable Shelves	3	3	6	6	6 (L) / 3 (R)	6 (L) / 3 (R)
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	24" x 24.75"	24" x 24.75"	(L) 24" x 24.75" (R) 21.25" x 26"	(L) 24" x 24.75" (R) 21.25" x 26"
Crated Shipping Weight	354 lbs.	354 lbs.	540 lbs.	540 lbs.	895 lbs.	895 lbs.
Crated Shipping Dimensions (W x D x H)	31.5" x 37.5" x 83"	31.5" x 37.5" x 83"	58" x 36.5" x 83"	58" x 36.5" x 83"	86" x 36.5" x 83"	86" x 36.5" x 83"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	3.5	3.5	5.8	8.5	9.2	9.2
HACR Breaker	15	15	15	15	20	20
*Energy Consumption (kWh / day) ENERGY STAR / DOE	1.96	1.84	3.45	3.02	5.25	4.98
*Heat Rejection (BTU / hr)	401	392	786	660	595 (L) / 367 (R)	595 (L) / 367 (R)
Voltage Range	104 - 126	96 - 136	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	33° - 52°F	33° - 52°F	33° - 52°F	33° - 52°F	33° - 52°F	33° - 52°F
Refrigerant	R-134A	R-134A	R-134A	R-134A	R-134A	R-134A
List F.O.B. Griffin	<b>\$5,370</b>	<b>\$6,350</b>	<b>\$7,150</b>	<b>\$8,590</b>	<b>\$12,750</b>	<b>\$14,160</b>

\*Based on 100°F ambient cycling at set point



## UPRIGHT REFRIGERATORS

## COMMERCIAL SERIES



**CR1S-FGY**  
ENERGY STAR  
Qualified



**CR2S-FGY**  
ENERGY STAR  
Qualified



**CR3S-FGY**

- Stainless steel exterior front and sides
- Energy efficient thermostatic expansion valve self contained refrigeration system
- Glass doors are energy efficient Multi Pane, Argon filled with locks

- Durable stainless steel interior
- Cabinet is insulated with 2-3/8" of R-134A CFC-free polyurethane foam
- 4" Heavy duty stem casters standard



Model Number	CR1S-FGY	CR2S-FGY	CR3S-FGY
Nominal Storage Capacity	23.3 ft <sup>3</sup>	47.2 ft <sup>3</sup>	74.3 ft <sup>3</sup>
Interior Storage Capacity (CF) (AHAM)	20.9 ft <sup>3</sup>	47.2 ft <sup>3</sup>	68.1 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 34.75" x 79.75"	55" x 34.75" x 79.75"	83" x 34.75" x 79.75"
Depth with doors open at 90°	57.25"	57.25"	57.25"
Interior Door opening width	22"	22"	22.8"
Interior Door opening height	59.5"	59.5"	59.5"
Adjustable Shelves	3	6	6 (L) / 3 (R)
Shelf Dimensions (W x D)	21.25" x 26"	24" x 24.75"	(L) 24" x 24.75" (R) 21.25" x 26"
Crated Shipping Weight	354 lbs.	540 lbs.	895 lbs.
Crated Shipping Dimensions (W x D x H)	31.5" x 37.5" x 83"	58" x 36.5" x 83"	86" x 36.5" x 83"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage	3.8	5.7	10
HACR Breaker	15	15	20
*Energy Consumption (kWh / day) ENERGY STAR / DOE	2.73	4.21	7.5
*Heat Rejection (BTU / hr)	550	968	(L) 968 (R) 683
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	33° - 52°F	33° - 52°F	33° - 52°F
Refrigerant	R-134A	R-134A	R-134A
List F.O.B. Griffin	<b>\$6,600</b>	<b>\$9,070</b>	<b>\$18,070</b>

\*Based on 100°F ambient cycling at set point



## COMMERCIAL SERIES

## UPRIGHT FREEZERS



CF1S-FS(L)

CF1S-HS(L)

CF2S-FS  
ENERGY STAR  
Qualified

CF2S-HS  
ENERGY STAR  
Qualified

CF3S-FS

CF3S-HS

- Stainless steel exterior front and sides
- Energy efficient thermostatic expansion valve self contained refrigeration system
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks
- Durable stainless steel interior
- Cabinet and doors are insulated with 2-3/8" of R-134A CFC-free polyurethane foam
- 4" Heavy duty stem casters standard



Model Number	CF1S-FS(L)	CF1S-HS(L)	CF2S-FS	CF2S-HS	CF3S-FS	CF3S-HS
Nominal Storage Capacity	23.3 ft <sup>3</sup>	23.3 ft <sup>3</sup>	51 ft <sup>3</sup>	51 ft <sup>3</sup>	74.3 ft <sup>3</sup>	74.3 ft <sup>3</sup>
Interior Storage Capacity (CF) (AHAM)	20.9 ft <sup>3</sup>	20.8 ft <sup>3</sup>	47.2 ft <sup>3</sup>	47.0 ft <sup>3</sup>	68.1 ft <sup>3</sup>	67.8 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 33.75" x 79.75"	27.5" x 33.75" x 79.75"	55" x 33.75" x 79.75"	55" x 33.75" x 79.75"	83" x 33.75" x 79.75"	83" x 33.75" x 79.75"
Depth with doors open at 90°	59.5"	59.5"	59.5"	59.5"	59.5"	59.5"
Interior Door opening width	22"	22"	22"	22"	22"	22"
Interior Door opening height	59.25"	27.75"	59.25"	27.75"	59.25"	27.75"
Adjustable Shelves	3	3	6	6	6 (L) / 3 (R)	6 (L) / 3 (R)
Shelf Dimensions (W x D)	21.75" x 26"	21.75" x 26"	24" x 24.75"	24" x 24.75"	(L) 24" x 24.75" (R) 21.25" x 26"	(L) 24" x 24.75" (R) 21.25" x 26"
Crated Shipping Weight	360 lbs.	360 lbs.	545 lbs.	545 lbs.	905 lbs.	905 lbs.
Crated Shipping Dimensions (W x D x H)	31.5" x 37.5" x 83"	31.5" x 37.5" x 83"	58" x 36.5" x 83"	58" x 36.5" x 83"	86" x 36.5" x 83"	86" x 36.5" x 83"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	230/115V/60/1	230/115V/60/1
Amperage	9.5	9.5	11	11	9.5	9.5
HACR Breaker	15	15	15	15	20	20
*Energy Consumption (kWh / day) ENERGY STAR / DOE	7.53	7.94	12.11	13.9	20.42	21.23
*Heat Rejection (BTU / hr)	1429	1704	2240	2244	2148 (L) / 1589 (R)	2148 (L) / 1589 (R)
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F
Refrigerant	R-404A	R-404A	R-404A	R-404A	R-404A	R-404A
List F.O.B. Griffin	<b>\$6,710</b>	<b>\$7,550</b>	<b>\$9,410</b>	<b>\$10,630</b>	<b>\$14,280</b>	<b>\$15,400</b>

\*Based on 100°F ambient cycling at set point

## UPRIGHT FREEZERS

## COMMERCIAL SERIES



**CF1S-FGY**  
ENERGY STAR  
Qualified



**CF2S-FGY**  
ENERGY STAR  
Qualified

- Stainless steel exterior front and sides
- Energy efficient thermostatic expansion valve self contained refrigeration system
- Glass doors are energy efficient Triple Pane, Argon filled with Low-E non reflective coating and locks

- Durable stainless steel interior
- Cabinet is insulated with 2-3/8" of R-134A CFC-free polyurethane foam
- 4" Heavy duty stem casters standard



Model Number	CF1S-FGY	CF2S-FGY
Nominal Storage Capacity	23.3 ft <sup>3</sup>	51.0 ft <sup>3</sup>
Interior Storage Capacity (CF) (AHAM)	20.9 ft <sup>3</sup>	47.2 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 34.75" x 79.75"	55" x 34.75" x 79.75"
Depth with doors open at 90°	57.25"	57.25"
Interior Door opening width	22"	22"
Interior Door opening height	59.5"	59.5"
Adjustable Shelves	3	6
Shelf Dimensions (W x D)	21.25" x 26"	24" x 24.75"
Crated Shipping Weight	360 lbs.	545 lbs.
Crated Shipping Dimensions (W x D x H)	31.5" x 37.5" x 83"	58" x 36.5" x 83"
Voltage	115V/60/1	115V/60/1
Amperage	8.6	10.5
HACR Breaker	15	15
*Energy Consumption (kWh / day) ENERGY STAR / DOE	9.6	14.98
*Heat Rejection (BTU / hr)	1450	2332
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 80°F	45° - 80°F
Control Set Point Range	-10° - +12°F	-10° - +12°F
Refrigerant	R-404A	R-404A
List F.O.B. Griffin	<b>\$9,780</b>	<b>\$13,820</b>

\*Based on 100°F ambient cycling at set point



**HR24A**  
**ENERGY STAR**  
Qualified

- Stainless steel exterior
- UL approval for outdoor use
- Energy efficient, one piece ABS interior liner
- Door is stainless steel exterior, aluminum interior and is field reversible
- Ducted air flow for even air distribution throughout cabinet
- Built-in cabinet installation with louvered trim



Model Number	HR24A
Interior Storage Capacity (CF) (AHAM)	4 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	23.4" x 24.5" x 32.7"
Depth with doors open at 90°	46.4"
Interior Door opening width	18.1"
Adjustable Shelves	3
Shelf Dimensions (W x D)	(1) 19.13" x 11" (2) 19.13" x 16"
Voltage	115V/60/1
Amperage	2
HACR Breaker	15
*Energy Consumption (kWh / day) ENERGY STAR / DOE	0.378
Voltage Range	104 - 127
Ambient Temp. Range	60° - 95°F
Control Set Point Range	36° - 50°F
Refrigerant	R-134A
List F.O.B. Griffin	<b>\$2,800</b>

\*Based on 100°F ambient cycling at set point

ACCESSORIES:

**HS-5057** - Tempered Glass Shelves, 3 pack

\$180

## UNDERCOUNTER REFRIGERATORS

## COMMERCIAL SERIES



**CRMR27(-01)**  
ENERGY STAR  
Qualified

**CRMR27-LP**  
ENERGY STAR  
Qualified

**CRMR48(-01)**  
ENERGY STAR  
Qualified

**CRMR60**

**CRMR72**

- Stainless steel exterior front, sides and top
- Cabinet and doors are insulated with 2" of R-134A CFC-free polyurethane foam
- 4" Stem casters standard (2.25" casters - LP model)

- Stainless steel exterior doors with ABS interior liner
- Field reversible door
- -01 - Door locks 27" & 48"



Model Number	<b>CRMR27</b> <b>CRMR27-01**</b> CRMR27-01 Cylinder Door Lock	<b>CRMR27-LP</b> Low Profile unit meets ADA requirements	<b>CRMR48</b> <b>CRMR48-01**</b> CRMR48-01 Cylinder Door Lock	<b>CRMR60</b>	<b>CRMR72</b>
<b>Nominal Storage Capacity</b>	7.2 ft <sup>3</sup>	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>	17.55 ft <sup>3</sup>	21.25 ft <sup>3</sup>
<b>Interior Storage Capacity (CF) (AHAM)</b>	6.22 ft <sup>3</sup>	6.22 ft <sup>3</sup>	11.95 ft <sup>3</sup>	16.6 ft <sup>3</sup>	19.7 ft <sup>3</sup>
<b>Overall Dimensions (W x D x H including 4" casters)</b>	27" 30" 33.63"	27" 30" 32.3"	48" 30" 33.63"	60" 30" 33.63"	72" 30" 33.63"
<b>Depth with doors open at 90°</b>	54.5"	54.5"	51.5"	57.5"	51.5"
<b>Interior Door opening width</b>	22.6"	22.6"	19.5"	25.5"	29.5"
<b>Interior Door opening height</b>	22.9"	22.9"	22.9"	22.9"	22.9"
<b>Adjustable Shelves</b>	1	1	2	2	3
<b>Shelf Dimensions (W x D)</b>	22" x 16"	22" x 16"	21.3" x 16"	27.3" x 15.9"	22" x 16"
<b>Crated Shipping Weight</b>	160 lbs.	160 lbs.	222 lbs.	268 lbs.	312 lbs.
<b>Crated Shipping Dimensions (W x D x H)</b>	31.5" x 34" x 36.5"	31.5" x 34" x 36.5"	52.5" x 34" x 36.5"	62" x 34" x 36.75"	74" x 34" x 36.5"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	2.6	2.6	2.6	4.2	2.6
<b>HACR Breaker</b>	15	15	15	15	15
<b>*Energy Consumption (kWh / day) ENERGY STAR / DOE</b>	.65	.65	1.44	2.15	2.84
<b>*Heat Rejection (BTU / hr)</b>	180	180	327	414	539
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Temperature Range</b>	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
<b>Refrigerant</b>	R-134A	R-134A	R-134A	R-134A	R-134A
<b>List F.O.B. Griffin</b>	<b>\$3,210</b> <b>**\$3,650</b>	<b>\$3,390</b>	<b>\$4,830</b> <b>**\$5,580</b>	<b>\$5,360</b>	<b>\$6,140</b>

\*\*SPECIAL ORDER - Please contact your local Hoshizaki Sales Representative for availability.



## COMMERCIAL SERIES

## UNDERCOUNTER FREEZERS



**CRMF27**  
ENERGY STAR  
Qualified



**CRMF27-LP**  
ENERGY STAR  
Qualified



**CRMF48**  
ENERGY STAR  
Qualified



**CRMF60**  
ENERGY STAR  
Qualified

- Stainless steel exterior front, sides and top
- Cabinet and doors are insulated with 2" of R-134A CFC-free polyurethane foam
- 4" Stem casters standard (2.25" casters - LP model)

- Stainless steel exterior door with ABS interior liner
- Field reversible door
- -01 - Door locks 27" & 48"



Model Number	<b>CRMF27</b> <b>CRMF27-01**</b> CRMF27-01 Cylinder Door Lock	<b>CRMF27-LP</b> Low Profile unit meets ADA requirements	<b>CRMF48</b> <b>CRMF48-01**</b> CRM48-01 Cylinder Door Lock	<b>CRMF60</b>
<b>Nominal Storage Capacity</b>	7.2 ft <sup>3</sup>	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>	17.55 ft <sup>3</sup>
<b>Interior Storage Capacity (CF) (AHAM)</b>	6.22 ft <sup>3</sup>	6.22 ft <sup>3</sup>	11.95 ft <sup>3</sup>	16.6 ft <sup>3</sup>
<b>Overall Dimensions (W x D x H including 4" casters)</b>	27" x 30" x 33.63"	27" x 30" x 32.3"	48" x 30" x 33.63"	60" x 30" x 33.63"
<b>Depth with doors open at 90°</b>	54.5"	54.5"	51.5"	57.5"
<b>Interior Door opening width</b>	22.6"	22.6"	19.5"	25.5"
<b>Interior Door opening height</b>	22.9"	22.9"	22.9"	22.9"
<b>Adjustable Shelves</b>	1	1	2	2
<b>Shelf Dimensions (W x D)</b>	22" x 16"	22" x 16"	21.3" x 16"	27.3" x 15.9"
<b>Crated Shipping Weight</b>	160 lbs.	160 lbs.	238 lbs.	268 lbs.
<b>Crated Shipping Dimensions (W x D x H)</b>	31.5" x 34" x 36.5"	31.5" x 34" x 36.5"	52.5" x 34" x 36.5"	62" x 34" x 36.5"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	3.4	3.4	6	6
<b>HACR Breaker</b>	15	15	15	15
<b>*Energy Consumption (kWh / day) ENERGY STAR / DOE</b>	2.66	2.66	4.34	4.86
<b>*Heat Rejection (BTU / hr)</b>	442	442	820	821
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Temperature Range</b>	-18° - +10°F	-18° - +10°F	-18° - +10°F	-10° - +10°F
<b>Refrigerant</b>	R-134A	R-134A	R-134A	R-134A
<b>List F.O.B. Griffin</b>	<b>\$3,870</b> <b>**\$4,350</b>	<b>\$4,080</b>	<b>\$5,610</b> <b>**\$6,420</b>	<b>\$6,960</b>

**\*\*SPECIAL ORDER - Please contact your local Hoshizaki Sales Representative for availability.**

## UNDERCOUNTER REFRIGERATORS with DRAWERS

## COMMERCIAL SERIES



**CRMR27-D**



**CRMR48-D4**



**CRMR60-D4**



**CRMR72-D6**

- Stainless steel exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- Stainless steel exterior drawers with stainless steel interior liner
- 4" Stem casters standard

Model Number	CRMR27-D	CRMR48-D4	CRMR60-D4	CRMR72-D6
Nominal Storage Capacity	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>	17.55 ft <sup>3</sup>	21.25 ft <sup>3</sup>
Interior Storage Capacity (CF) (AHAM)	6.22 ft <sup>3</sup>	11.95 ft <sup>3</sup>	16.6 ft <sup>3</sup>	19.7 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.63"	48" x 30" x 33.63"	60" x 30" x 33.63"	72" x 30" x 33.63"
Depth with drawer fully open	49.25"	43.25"	50.1"	43.25"
Drawer opening width	22.6"	19.5"	25.5"	19.5"
Drawer opening height	22.9"	22.9"	22.9"	22.9"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	N/A	N/A	N/A	N/A
Crated Shipping Weight	176 lbs.	262 lbs.	308 lbs.	372 lbs.
Crated Shipping Dimensions (W x D x H)	31.5" x 34" x 36.5"	52.5" x 34" x 36.5"	62" x 34" x 36.75"	74" x 34" x 36.75"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	2.6	2.6	4.2	4.2
HACR Breaker	15	15	15	15
*Energy Consumption (kWh / day) ENERGY STAR / DOE / NSF	1.4	2.3	2.15	4.5
*Heat Rejection (BTU / hr)	202.8	327	473.5	647
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R-134A	R-134A	R-134A	R-134A
Accessories (See page 78-81 for prices)	HS-4007	HS-4007	HS-4007	HS-4007
List F.O.B. Griffin	<b>\$5,070</b>	<b>\$8,440</b>	<b>\$9,540</b>	<b>\$12,170</b>



## COMMERCIAL SERIES

## UNDERCOUNTER FREEZER with DRAWERS



**CRMF27-D**



**CRMF48-D4**

- Stainless steel exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- Stainless steel exterior drawers with stainless steel interior liner
- 4" Stem casters standard

Model Number	CRMF27-D	CRMF48-D4
Nominal Storage Capacity	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>
Interior Storage Capacity (CF) (AHAM)	6.22 ft <sup>3</sup>	11.95 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27"30"33.63"	48"30"33.63"
Depth with drawer fully open	43.25"	50.25"
Drawer opening width	22.6"	19.5"
Drawer opening height	22.9"	22.9"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 size and (1) 1/3 Size, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	N/A	N/A
Crated Shipping Weight	176 lbs.	262 lbs.
Crated Shipping Dimensions (W x D x H)	31.5" x 34" x 36.5"	52.5" x 34" x 36.5"
Voltage	115V/60/1	115V/60/1
Amperage	3.4	6
HACR Breaker	15	15
*Energy Consumption (kWh / day) ENERGY STAR / DOE / NSF	3.9	6.6
*Heat Rejection (BTU / hr)	560	945
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Temperature Range	-18° - +10°F	-10° - +10°F
Refrigerant	R-134A	R-134A
Accessories (See page 78-81 for prices)	HS-4007	HS-4007
List F.O.B. Griffin	<b>\$6,080</b>	<b>\$9,180</b>



## WORKTOP REFRIGERATORS

## COMMERCIAL SERIES



**CRMR27-W(-01)**  
ENERGY STAR  
Qualified



**CRMR48-W(-01)**  
ENERGY STAR  
Qualified



**CRMR60-W**



**CRMR72-W**

- Stainless steel exterior front, sides and top
- Cabinet and doors are insulated with 2" of R-134A CFC-free polyurethane foam
- 6" Stem casters standard

- Stainless steel exterior door with ABS interior liner
- Field reversible door
- -01 - Door locks 27" & 48"



Model Number	<b>CRMR27-W</b> <b>CRMR27-W01**</b> CRMR27-W01 Cylinder Door Lock	<b>CRMR48-W</b> <b>CRMR48-W01**</b> CRMR48-W01 Cylinder Door Lock	<b>CRMR60-W</b>	<b>CRMR72-W</b>
<b>Nominal Storage Capacity</b>	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>	17.55 ft <sup>3</sup>	21.25 ft <sup>3</sup>
<b>Interior Storage Capacity (CF) (AHAM)</b>	6.22 ft <sup>3</sup>	11.95 ft <sup>3</sup>	16.6 ft <sup>3</sup>	19.7 ft <sup>3</sup>
<b>Overall Dimensions (W x D x H including 6" casters)</b>	27" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"	72" x 30" x 40"
<b>Depth with doors open at 90°</b>	54.5"	51.5"	57.5"	51.5"
<b>Interior Door opening width</b>	22.6"	19.5"	25.5"	19.5"
<b>Interior Door opening height</b>	22.9"	22.9"	22.9"	22.9"
<b>Adjustable Shelves</b>	1	2	2	3
<b>Shelf Dimensions (W x D)</b>	22.8" x 16"	21.3" x 16"	27.3" x 15.9"	22.0" x 16"
<b>Crated Shipping Weight</b>	156 lbs.	222 lbs.	272 lbs.	317 lbs.
<b>Crated Shipping Dimensions (W x D x H)</b>	31.5" x 34" x 40.5"	52.5" x 34" x 40.5"	62" x 34" x 40.75"	74" x 34" x 40.5"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	2.6	2.6	4.2	2.6
<b>HACR Breaker</b>	15	15	15	15
<b>*Energy Consumption (kWh / day) ENERGY STAR / DOE</b>	.65	1.44	2.15	4.2
<b>*Heat Rejection (BTU / hr)</b>	180	327	414	539
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Temperature Range</b>	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
<b>Refrigerant</b>	R-134A	R-134A	R-134A	R-134A
<b>List F.O.B. Griffin</b>	<b>\$3,370</b> <b>**\$3,690</b>	<b>\$5,050</b> <b>**\$5,620</b>	<b>\$5,610</b>	<b>\$6,430</b>

**\*\*SPECIAL ORDER - Please contact your local Hoshizaki Sales Representative for availability.**



## COMMERCIAL SERIES

## WORKTOP FREEZERS



**CRMF27-W(-01)**  
ENERGY STAR  
Qualified



**CRMF48-W(-01)**  
ENERGY STAR  
Qualified



**CRMF60-W**  
ENERGY STAR  
Qualified

- Stainless steel exterior front, sides and top
- Cabinet and doors are insulated with 2" of R-134A CFC-free polyurethane foam
- 6" Stem casters standard

- Stainless steel exterior door with ABS interior liner
- Field reversible door
- -01 - Door locks 27" & 48"



Model Number	<b>CRMF27-W</b> <b>CRMF27-W01**</b> CRMF27-W01 Cylinder Door Lock	<b>CRMF48-W</b> <b>CRMF48-W01**</b> CRMF48-W01 Cylinder Door Lock	<b>CRMF60-W</b>
<b>Nominal Storage Capacity</b>	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>	17.55 ft <sup>3</sup>
<b>Interior Storage Capacity (CF) (AHAM)</b>	6.22 ft <sup>3</sup>	11.95 ft <sup>3</sup>	16.6 ft <sup>3</sup>
<b>Overall Dimensions (W x D x H including 6" casters)</b>	27" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"
<b>Depth with doors open at 90°</b>	54.5"	51.5"	57.5"
<b>Interior Door opening width</b>	22.6"	19.5"	25.5"
<b>Interior Door opening height</b>	22.9"	22.9"	22.9"
<b>Adjustable Shelves</b>	1	2	3
<b>Shelf Dimensions (W x D)</b>	22.8" x 16.0"	21.3" x 16"	27.3" x 15.9"
<b>Crated Shipping Weight</b>	160 lbs.	238 lbs.	272 lbs.
<b>Crated Shipping Dimensions (W x D x H)</b>	31.5" x 34" x 40.5"	52.5" x 34" x 40.5"	62" x 34" x 40.5"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	3.4	6	6
<b>HACR Breaker</b>	15	15	15
<b>*Energy Consumption (kWh / day) ENERGY STAR / DOE</b>	2.66	4.34	4.86
<b>*Heat Rejection (BTU / hr)</b>	442	820	821
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F
<b>Temperature Range</b>	-18° - +10°F	20° - 52°F	-10° - +10°F
<b>Refrigerant</b>	R-134A	R-134A	R-134A
<b>List F.O.B. Griffin</b>	<b>\$3,950</b> <b>**\$4,280</b>	<b>\$5,850</b> <b>**\$6,440</b>	<b>\$7,240</b>

**\*\*SPECIAL ORDER - Please contact your local Hoshizaki Sales Representative for availability.**

## WORKTOP REFRIGERATORS with DRAWERS

## COMMERCIAL SERIES



**CRMR27-WD**



**CRMR48-WD4**



**CRMR60-WD4**



**CRMR72-WD6**

- Stainless steel exterior front, sides and top
- Cabinet and drawers are insulated with 2" of foamed in place polyurethane

- Stainless steel exterior drawers with stainless steel interior liner
- 6" Stem casters standard



Model Number	CRMR27-WD	CRMR48-WD4	CRMR60-WD4	CRMR72-WD6
Nominal Storage Capacity	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>	17.55 ft <sup>3</sup>	21.25 ft <sup>3</sup>
Interior Storage Capacity (CF) (AHAM)	6.22 ft <sup>3</sup>	11.95 ft <sup>3</sup>	16.6 ft <sup>3</sup>	19.7 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"	72" x 30" x 40"
Depth with drawer fully open	43.25"	43.25"	50.1"	43.25"
Drawer opening width	22.6"	19.5"	25.5"	19.5"
Drawer opening height	22.9"	22.9"	22.9"	22.9"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	N/A	N/A	N/A	N/A
Crated Shipping Weight	176 lbs.	263 lbs.	312 lbs.	377 lbs.
Crated Shipping Dimensions (W x D x H)	31.5" x 34" x 40.5"	52.5" x 34" x 40.5"	62" x 34" x 40.75"	74" x 34" x 40.75"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	2.6	2.6	4.2	4.2
HACR Breaker	15	15	15	15
*Energy Consumption (kWh / day) ENERGY STAR / DOE / NSF	1.4	2.3	2.15	4.5
*Heat Rejection (BTU / hr)	202.8	327	473.5	647
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R-134A	R-134A	R-134A	R-134A
Accessories (See page 78-81 for prices)	HS-4007	HS-4007	HS-4007	HS-4007
List F.O.B. Griffin	<b>\$5,180</b>	<b>\$8,580</b>	<b>\$9,740</b>	<b>\$12,600</b>



## COMMERCIAL SERIES

## WORKTOP FREEZER with DRAWERS



**CRMF27-WD**



**CRMF48-WD4**

- Stainless steel exterior front, sides and top
- Cabinet and drawers are insulated with 2" of foamed in place polyurethane

- Stainless steel exterior drawer with stainless steel interior liner
- 6" Stem casters standard

Model Number	CRMF27-WD	CRMF48-WD4
Nominal Storage Capacity	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>
Interior Storage Capacity (CF) (AHAM)	6.22 ft <sup>3</sup>	11.95 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" 30" 40"	48" 30" 40"
Depth with drawer fully open	49.25"	50.25"
Drawer opening width	22.6"	19.5"
Drawer opening height	22.9"	22.9"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 Size and (1) 1/3 Size, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	N/A	N/A
Crated Shipping Weight	176 lbs.	263 lbs.
Crated Shipping Dimensions (W x D x H)	31.5" x 34" x 40.5"	52.5" x 34" x 40.5"
Voltage	115V/60/1	115V/60/1
Amperage	2.6	6
HACR Breaker	15	15
*Energy Consumption (kWh / day) ENERGY STAR / DOE	3.9	6.6
*Heat Rejection (BTU / hr)	202.8	945
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Temperature Range	-18° - +10°F	-10° - +10°F
Refrigerant	R-134A	R-134A
Accessories (See page 78-81 for prices)	HS-4007	HS-4007
List F.O.B. Griffin	<b>\$6,220</b>	<b>\$9,380</b>

## PREP TABLES - SANDWICH TOP REFRIGERATORS

## COMMERCIAL SERIES



**CRMR27-8**



**CRMR48-8**



**CRMR48-12**



**CRMR60-8**



**CRMR60-12**



**CRMR60-16**



**CRMR72-12**



**CRMR72-16**



**CRMR72-18**

- Stainless steel exterior front, sides and top
- Cabinet and doors are insulated with 2" of R-134A CFC-free polyurethane foam
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Stainless steel exterior door with ABS interior liner
- 6" Stem casters standard
- Field reversible door
- 1/2" x 10" Cutting board standard

Model Number	CRMR27-8	CRMR48-8	CRMR48-12	CRMR60-8	CRMR60-12	CRMR60-16	CRMR72-12	CRMR72-16	CRMR72-18
<b>Nominal Storage Capacity</b>	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>	13.66 ft <sup>3</sup>	17.55 ft <sup>3</sup>	17.55 ft <sup>3</sup>	17.55 ft <sup>3</sup>	21.25 ft <sup>3</sup>	21.25 ft <sup>3</sup>	21.25 ft <sup>3</sup>
<b>Overall Dimensions (W x D x H including 6" casters)</b>	27" x 30" x 45.2"	48" x 30" x 45.2"	48" x 30" x 45.2"	60" x 30" x 45.2"	60" x 30" x 45.2"	60" x 30" x 45.2"	72" x 30" x 45.2"	72" x 30" x 45.2"	72" x 30" x 45.2"
<b>Depth with Cutting Board installed</b>	30.7"	30.7"	30.7"	30.3"	30.3"	30.3"	30.7"	30.7"	30.7"
<b>Depth with doors open at 90°</b>	54.5"	51.5"	51.5"	51.5"	51.5"	51.5"	51.5"	51.5"	51.5"
<b>Interior Door opening width</b>	22.75"	19.5"	19.5"	25.5"	25.5"	25.5"	19.5"	19.5"	19.5"
<b>Interior Door opening height</b>	22.9"	22.9"	22.9"	22.9"	22.9"	22.9"	22.9"	22.9"	22.9"
<b>Adjustable Shelves</b>	1	2	2	2	2	2	3	3	3
<b>Shelf Dimensions (W x D)</b>	22" x 16"	21.3" x 16"	21.3" x 16"	22" x 15.9"	22" x 15.9"	22" x 15.9"	22" x 15.9"	22" x 15.9"	22" x 15.9"
<b>Crated Shipping Weight</b>	185 lbs.	260 lbs.	260 lbs.	323 lbs.	323 lbs.	323 lbs.	375 lbs.	375 lbs.	375 lbs.
<b>Crated Shipping Dimensions (W x D x H)</b>	31.5" x 34" x 45.1"	52.5" x 34" x 45.1"	52.5" x 34" x 45.1"	62" x 34" x 45.1"	62" x 34" x 45.1"	62" x 34" x 45.1"	74" x 34" x 45.7"	74" x 34" x 45.7"	74" x 34" x 45.7"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	2.6	2.9	2.9	5.5	5.5	5.5	5.5	5.5	5.5
<b>HACR Breaker</b>	15	15	15	15	15	15	15	15	15
<b>*Energy Consumption (kWh / day) ENERGY STAR / DOE</b>	2.6	4	4	4.2	4.2	4.2	6.41	6.41	6.41
<b>*Heat Rejection (BTU / hr)</b>	540	567	567	596	596	596	911	911	911
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 86°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 86°F	45° - 86°F	45° - 86°F
<b>Temperature Range</b>	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
<b>Refrigerant</b>	R-134A	R-134A	R-134A	R-134A	R-134A	R-134A	R-134A	R-134A	R-134A
<b>Accessories (See page 40-43 for prices)</b>	HS-5068 HS-5069 HS-5072 HS-5075	HS-5068 HS-5069 HS-5073 HS-5076	HS-5068 HS-5069 HS-5074 HS-5076	HS-5068 HS-5069 HS-5073 HS-5170	HS-5068 HS-5069 HS-5074 HS-5170	HS-5068 HS-5069 HS-5106 HS-5170	HS-5068 HS-5069 HS-5074 HS-5086	HS-5068 HS-5069 HS-5106 HS-5086	HS-5068 HS-5069 HS-5107 HS-5086
<b>List F.O.B. Griffin</b>	<b>\$3,690</b>	<b>\$5,160</b>	<b>\$5,690</b>	<b>\$6,240</b>	<b>\$6,340</b>	<b>\$6,060</b>	<b>\$7,330</b>	<b>\$7,400</b>	<b>\$7,130</b>



## COMMERCIAL SERIES

## PREP TABLES - SANDWICH TOP REFRIGERATORS with DRAWERS



**CRMR27-8D**



**CRMR48-12D4**

- Stainless steel exterior front, sides and top
- Cabinet and drawers are insulated with 2" of foamed in place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Stainless steel exterior drawer with ABS interior liner
- (-8) - 8 Pan capacity, 4" deep
- 1/2" x 10" Cutting board standard
- 6" Stem casters standard
- (-12) - 12 Pan capacity, 4" deep

Model Number	CRMR27-8D	CRMR48-12D4
Nominal Storage Capacity	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27"30"45.2"	48"30"45.2"
Depth with Cutting Board installed	30.7"	30.7"
Depth with drawer fully open	43.25"	43.25"
Drawer opening width	22.6"	19.5"
Drawer opening height	22.9"	22.9"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	8 (6" max. pan depth)	12 (6" max. pan depth)
Crated Shipping Weight	205 lbs.	262 lbs.
Crated Shipping Dimensions (W x D x H)	31.5" x 34" x 46.2"	52.5" x 34" x 46.2"
Voltage	115V/60/1	115V/60/1
Amperage	2.6	2.9
HACR Breaker	15	15
*Energy Consumption (kWh / day) ENERGY STAR / DOE	1.6	4
*Heat Rejection (BTU / hr)	230	567
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 86°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F
Refrigerant	R-134A	R-134A
Accessories (See page 40-43 for prices)	HS-5068 HS-5069 HS-4007 HS-5072 HS-5075	HS-5068 HS-5069 HS-4007 HS-5074 HS-5076
List F.O.B. Griffin	<b>\$5,890</b>	<b>\$9,340</b>

## PREP TABLES - MEGA TOP REFRIGERATORS

## COMMERCIAL SERIES



**CRMR27-12M**



**CRMR48-12M**



**CRMR48-18M**



**CRMR60-12M**



**CRMR60-18M**



**CRMR60-24M**



**CRMR72-18M**



**CRMR72-24M**



**CRMR72-30M**

- Stainless steel exterior front, sides and top
- Stainless steel exterior door with ABS interior liner
- Cabinet and doors are insulated with 2" of R-134A CFC-free polyurethane foam
- Field reversible door
- Provided with full complement of polycarbonate plastic 1/6th size pans
- 6" Stem casters standard
- (-12M) - 12 Pan capacity, 4" deep
- (-18M) - 18 Pan capacity, 4" deep
- (-24M) - 24 Pan capacity, 4" deep
- (-30M) - 30 Pan capacity, 4" deep
- 1/2" x 10" Cutting board standard

Model Number	CRMR27-12M	CRMR48-12M	CRMR48-18M	CRMR60-12M	CRMR60-18M	CRMR60-24M	CRMR72-18M	CRMR72-24M	CRMR72-30M
<b>Nominal Storage Capacity</b>	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>	13.66 ft <sup>3</sup>	17.55 ft <sup>3</sup>	17.55 ft <sup>3</sup>	17.55 ft <sup>3</sup>	21.25 ft <sup>3</sup>	21.25 ft <sup>3</sup>	21.25 ft <sup>3</sup>
<b>Overall Dimensions (W x D x H including 6" casters)</b>	27" x 30" x 45.2"	48" x 30" x 45.2"	48" x 30" x 45.2"	60" x 30" x 45.2"	60" x 30" x 45.2"	60" x 30" x 45.2"	72" x 31" x 45.2"	72" x 31" x 45.2"	72" x 31" x 45.2"
<b>Depth with Cutting Board installed</b>	30.7"	35.3"	35.3"	35.3"	35.3"	35.3"	35.3"	35.3"	35.3"
<b>Depth with doors open at 90°</b>	54.5"	51.5"	51.5"	51.5"	51.5"	51.5"	51.5"	51.5"	51.5"
<b>Interior Door opening width</b>	22.75"	19.5"	19.5"	25.5"	25.5"	25.5"	19.5"	19.5"	19.5"
<b>Interior Door opening height</b>	22.9"	22.9"	22.9"	22.9"	22.9"	22.9"	22.9"	22.9"	22.9"
<b>Adjustable Shelves</b>	1	2	2	2	2	2	3	3	3
<b>Shelf Dimensions (W x D)</b>	22" x 16"	21.3" x 16"	21.3" x 16"	22" x 15.9"	22" x 15.9"	22" x 15.9"	22" x 15.9"	22" x 15.9"	22" x 15.9"
<b>Crated Shipping Weight</b>	185 lbs.	260 lbs.	260 lbs.	323 lbs.	323 lbs.	323 lbs.	375 lbs.	375 lbs.	375 lbs.
<b>Crated Shipping Dimensions (W x D x H)</b>	31.5" x 34" x 45.1"	52.5" x 34" x 45.1"	52.5" x 34" x 45.1"	64.5" x 34" x 45.1"	64.5" x 34" x 45.1"	64.5" x 34" x 45.1"	74" x 34" x 45.7"	74" x 34" x 45.7"	74" x 34" x 45.7"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	2.6	2.9	2.9	5.5	5.5	5.5	5.5	5.5	5.5
<b>HACR Breaker</b>	15	15	15	15	15	15	15	15	15
<b>*Energy Consumption (kWh / day) ENERGY STAR / DOE</b>	2.6	4	4	4.2	4.2	4.2	6.54	6.54	6.54
<b>*Heat Rejection (BTU / hr)</b>	540	567	567	597.5	597.5	597.5	929	929	929
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 86°F	45° - 100°F	45° - 100°F	45° - 86°F	45° - 86°F	45° - 86°F	45° - 86°F	45° - 86°F	45° - 86°F
<b>Temperature Range</b>	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
<b>Refrigerant</b>	R-134A	R-134A	R-134A	R-134A	R-134A	R-134A	R-134A	R-134A	R-134A
<b>Accessories (See page 78-81 for prices)</b>	HS-5067 HS-5070 HS-5075	HS-5067 HS-5070 HS-5076	HS-5067 HS-5071 HS-5176	HS-5067 HS-5070 HS-5170	HS-5067 HS-5071 HS-5170	HS-5067 HS-5070 (2) HS-5170	HS-5067 HS-5107 HS-5086	HS-5067 HS-5070 (2) HS-5086	HS-5067 HS-5070 + HS-5071 HS-5086
<b>List F.O.B. Griffin</b>	<b>\$4,420</b>	<b>\$6,660</b>	<b>\$6,440</b>	<b>\$7,330</b>	<b>\$7,430</b>	<b>\$7,150</b>	<b>\$8,470</b>	<b>\$8,610</b>	<b>\$8,250</b>



## COMMERCIAL SERIES

## PREP TABLES - MEGA TOP REFRIGERATORS with DRAWERS



**CRMR27-12MD**



**CRMR48-18MD4**



**CRMR60-24MD4**



**CRMR72-30MD6**

- Stainless steel exterior front sides and top
- Cabinet and drawers are insulated with 2" of CFC free, foamed in place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep

- Stainless steel exterior drawer with stainless steel interior liner
- Enamel coated evaporator coil
- 1/2" x 10" Cutting board standard

- Standard with 6" stem casters (two with brakes)

Model Number	CRMR27-12MD	CRMR48-18MD4	CRMR60-24MD4	CRMR72-30MD6
Nominal Storage Capacity	7.2 ft <sup>3</sup>	13.66 ft <sup>3</sup>	16.6 ft <sup>3</sup>	19.7 ft <sup>3</sup>
Overall Height (including 6" casters)	27" x 30" x 45.2"	48" x 30" x 45.2"	60" x 30" x 45.2"	72" x 30" x 45.2"
Depth with Cutting Board installed	37.3"	37.3"	37.3"	37.3"
Depth with drawer fully open	49.25"	43.25"	50.25"	50.25"
Drawer opening width	22.6"	19.5"	25.5"	19.5"
Drawer opening height	22.9"	22.9"	22.9"	22.9"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	12 (6" max. pan depth)	18 (6" max. pan depth)	24 (6" max. pan depth)	30 (6" max. pan depth)
Crated Shipping Weight	205 lbs.	262 lbs.	343 lbs.	435 lbs.
Crated Shipping Dimensions (W x D x H)	31.5" x 34" x 46.2"	52.5" x 34" x 46.2"	64.5" x 34" x 46.2"	74" x 34" x 46.2"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	2.6	2.9	5.5	4.9
HACR Breaker	15	15	15	15
*Energy Consumption (kWh / day) ENERGY STAR / DOE	1.6	4	3.9	5.1
*Heat Rejection (BTU / hr)	230	567	556	726
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 86°F	45° - 86°F	45° - 86°F	45° - 86°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R-134A	R-134A	R-134A	R-134A
Accessories (See page 78-81 for prices)	HS-5067 HS-4007 HS-5070 HS-5075	HS-5067 HS-4007 HS-5071 HS-5076	HS-5067 HS-4007 HS-5070 (2) HS-5170	HS-5067 HS-4007 HS-5070 + HS-5071 HS-5086
List F.O.B. Griffin	<b>\$7,020</b>	<b>\$10,080</b>	<b>\$12,030</b>	<b>\$14,700</b>



## PREP TABLES - PIZZA REFRIGERATORS

## COMMERCIAL SERIES



**CPT46**



**CPT67**



**CPT93**

- Stainless steel exterior front, sides and top
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Full complement of 1/3rd size pans are standard
- Stainless steel exterior door with ABS interior liner
- 6" Stem casters standard
- Field reversible door
- 1/2" x 19" Cutting board standard

Model Number	CPT46	CPT67	CPT93
Nominal Storage Capacity	11.0 ft <sup>3</sup>	19.9 ft <sup>3</sup>	30.1 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	46" x 32.24" x 43.45"	67" x 32.24" x 43.45"	93" x 32.24" x 43.45"
Depth with doors open at 90°	57.71"	57.71"	57.71"
Interior Door opening width	22.6"	22.6"	22.6"
Interior Door opening height	22.9"	22.9"	22.9"
Adjustable Shelves	2	4	6
Shelf Dimensions (W x D)	22.0" x 15.9"	24.8" x 25.61"	24.8" x 25.61"
Pan Capacity (# of 1/3 size x 4" deep)	6 (6" max. pan depth)	9 (6" max. pan depth)	12 (6" max. pan depth)
Crated Shipping Weight	283 lbs.	400 lbs.	628 lbs.
Crated Shipping Dimensions (W x D x H)	47.75" x 33.75" x 44.25"	68.75" x 33.75" x 44.25"	94.75" x 33.75" x 44.25"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage	5.5	5.5	5.5
HACR Breaker	15	15	15
*Energy Consumption (kWh / day) @ NSF	3.2	5	5.5
*Heat Rejection (BTU / hr)	454	778	775.3
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 86°F	45° - 86°F	45° - 86°F
Control Set Point Range	28° - 45°F	28° - 45°F	28° - 45°F
Refrigerant	R-134A	R-134A	R-134A
Accessories (See page 78-81 for prices)	HS-4009	HS-4009	HS-4009
List F.O.B. Griffin	<b>\$7,310</b>	<b>\$9,930</b>	<b>\$13,430</b>



## COMMERCIAL SERIES

## PREP TABLES - PIZZA REFRIGERATORS with DRAWERS



CPT46-D



CPT67-D4



CPT93-D6

- Stainless steel exterior front, sides and top
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Standard with 6" casters (two with brakes)
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep

- Stainless steel exterior drawers with stainless steel interior liner
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- 1/2" x 19" Cutting board standard

Model Number	CPT46-D	CPT67-D4	CPT93-D6
Nominal Storage Capacity	11 ft <sup>3</sup>	19.9 ft <sup>3</sup>	30.1 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	46" x 32.24" x 43.45"	67" x 32.24" x 43.45"	93" x 32.24" x 43.45"
Depth with Cutting Board installed	35.17"	35.17"	35.17"
Depth with drawer fully open	58.24"	58.24"	57.50"
Drawer opening width	22.59"	22.59"	22.59"
Drawer opening height	22.92"	22.92"	22.92"
Drawer Pan Capacity (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans
Pan Capacity (# of 1/3 size x 4" deep)	6	9	12
Crated Shipping Weight	325 lbs.	387 lbs.	620 lbs.
Crated Shipping Dimensions (W x D x H)	47.75" x 33.75" x 44.25"	68.75" x 33.75" x 44.25"	94.75" x 33.75" x 44.25"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage	3.7	5.5	5.5
HACR Breaker	15	15	15
*Energy Consumption (kWh / day) ENERGY STAR / DOE	4.3	6	5.7
*Heat Rejection (BTU / hr)	605	848	803.5
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 86°F	45° - 86°F	45° - 86°F
Control Set Point Range	28° - 45°F	28° - 45°F	28° - 45°F
Refrigerant	R-134A	R-134A	R-134A
Accessories (See page 78-81 for prices)	HS-4007 HS-4009	HS-4007 HS-4009	HS-4007 HS-4009
List F.O.B. Griffin	<b>\$9,450</b>	<b>\$14,670</b>	<b>\$20,090</b>

## LOW-PROFILE REFRIGERATED EQUIPMENT STANDS

## COMMERCIAL SERIES



**CRES49**



**CRES72**



**CRES85**



**CRES98**

- Stainless steel exterior front, sides and top
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Standard with (4-8) 4" casters all with brakes
- 16 gauge stainless steel top with marine edge front and rear and 1" turn-up at each end
- Top is provided with an exclusive, built in, Hoshizaki ceramic heat shield

Model Number	CRES49	CRES72	CRES85	CRES98
<b>Overall Dimensions (W x D x H including 4" casters)</b>	49" x 33.25" x 26"	72.5" x 33.25" x 26"	85" x 33.25" x 26"	98" x 33.25" x 26"
<b>Depth with Drawer Fully Open (Including 1.5" Bumper)</b>	55.75"	55.75"	55.75"	55.75"
<b>Maximum Pan Depth</b>	6"	6"	6"	6"
<b>Worktop Maximum Load Capacity</b>	700 lbs	1200 lbs	1200 lbs	1500 lbs
<b>Drawer Pan Capacity (pans by others)</b>	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	Left drawers: (3) 12" x 20" x 6" deep pans Right drawers: (2) 12" x 20" x 6" deep pans	(3) 12" x 20" x 6" deep pans
<b>Pan Capacity (12" x 20")</b>	2.5	8	10	12
<b>Crated Shipping Weight</b>	327 lbs.	410 lbs.	560 lbs.	646 lbs.
<b>Crated Shipping Dimensions (W x D x H)</b>	50" x 34.25" x 28.75"	74" x 34.25" x 28.75"	87" x 34.5" x 28.75"	100" x 34.5" x 28.75"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	3.7	4.3	4.3	4.3
<b>HACR Breaker</b>	15	15	15	15
<b>*Energy Consumption (kWh / day) NSF</b>	1.9	2.8	3.8	3.8
<b>*Heat Rejection (BTU / hr) @ NSF</b>	275	398.1	538	535
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Control Set Point Range</b>	28° - 45°F	28° - 45°F	28° - 45°F	28° - 45°F
<b>Refrigerant</b>	R-134A	R-134A	R-134A	R-134A
<b>Accessories (See page 78-81 for prices)</b>	HS-4007	HS-4007	HS-4007	HS-4007
<b>List F.O.B. Griffin</b>	<b>\$12,100</b>	<b>\$14,400</b>	<b>\$16,800</b>	<b>\$18,700</b>



## PROFESSIONAL SERIES

## UPRIGHT REFRIGERATORS



**RH1-SSE-FS**  
ENERGY STAR  
Qualified



**RH1-SSE-HS**  
ENERGY STAR  
Qualified



**RH2-SSE-FS**  
ENERGY STAR  
Qualified



**RH2-SSE-HS**



**RH3-SSE-FS**  
ENERGY STAR  
Qualified



**RH3-SSE-HS**  
ENERGY STAR  
Qualified

- Stainless steel interior and exterior
- Innovative Variable Speed Compressor with "adaptive control" technology
- EverCheck™ controls with audio and visual alert

- Energy efficient thermostatic expansion valve self contained refrigeration system
- Doors are constructed of high grade stainless steel



Model Number	RH1-SSE-FS	RH1-SSE-HS	RH2-SSE-FS	RH2-SSE-HS	RH3-SSE-FS	RH3-SSE-HS
Interior Storage Capacity	22.3 ft <sup>3</sup>	22.3 ft <sup>3</sup>	48 ft <sup>3</sup>	48 ft <sup>3</sup>	74 ft <sup>3</sup>	74 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27.5" x 33.6" x 82.5"	27.5" x 33.6" x 82.5"	56" x 33.6" x 82.5"	56" x 33.6" x 82.5"	82.5" x 33.6" x 82.5"	82.5" x 33.6" x 82.5"
Depth with doors open at 90°	58.5"	58.5"	58.5"	58.5"	58.5"	58.5"
Interior Door opening width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door opening height	59.25"	26.75"	59.25"	26.75"	59.25"	26.75"
Adjustable Shelves	3	3	6	6	9	9
Center Shelves	N/A	N/A	3	3	6	6
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"
Crated Shipping Weight	400 lbs.	400 lbs.	625 lbs.	625 lbs.	825 lbs.	825 lbs.
Crated Shipping Dimensions (W x D x H)	32" x 38" x 85"	32" x 38" x 85"	59" x 38" x 85"	59" x 38" x 85"	87" x 38" x 85"	87" x 38" x 85"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	4.3	4.3	6	6	7.1	7.1
HACR Breaker	15	15	15	15	15	15
*Energy Consumption (kWh / day) ENERGY STAR / DOE	2.1	1.9	3.4	3.9	4.3	4.3
*Heat Rejection (BTU / hr)	582	582	938	938	2,085	2,085
Voltage Range	80 - 140	80 - 140	80 - 140	80 - 140	80 - 140	80 - 140
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F
Refrigerant	R-404A	R-404A	R-404A	R-404A	R-404A	R-404A
List F.O.B. Griffin	<b>\$11,070</b>	<b>\$11,670</b>	<b>\$13,840</b>	<b>\$15,080</b>	<b>\$19,750</b>	<b>\$22,200</b>

\*Based on 100°F ambient cycling at set point

## UPRIGHT REFRIGERATORS

## PROFESSIONAL SERIES



**RH1-SSE-FG**

**RH1-SSE-HG**

**RH2-SSE-FG**  
ENERGY STAR  
Qualified

**RH2-SSE-HG**  
ENERGY STAR  
Qualified

**RH3-SSB-FG**  
ENERGY STAR  
Qualified

**RH3-SSB-HG**

- Stainless steel interior and exterior
- Innovative Variable Speed Compressor with "adaptive control" technology
- EverCheck™ controls with audio and visual alert
- Energy efficient thermostatic expansion valve self contained refrigeration system
- Glass doors are energy efficient triple pane, argon filled with Low-E non-reflective coating and locks



Model Number	RH1-SSE-FG	RH1-SSE-HG	RH2-SSE-FG	RH2-SSE-HG	RH3-SSB-FG	RH3-SSB-HG
<b>Interior Storage Capacity</b>	22.3 ft <sup>3</sup>	22.3 ft <sup>3</sup>	48 ft <sup>3</sup>	48 ft <sup>3</sup>	74 ft <sup>3</sup>	73.6 ft <sup>3</sup>
<b>Overall Dimensions (W x D x H including 4" casters)</b>	27.5" x 33.6" x 82.5"	27.5" x 33.6" x 82.5"	56" x 33.6" x 82.5"	56" x 33.6" x 82.5"	82.5" x 33.6" x 82.5"	82.5" x 33.6" x 82.5"
<b>Depth with doors open at 90°</b>	58.5"	58.5"	58.5"	58.5"	58.5"	58.5"
<b>Interior Door opening width</b>	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
<b>Interior Door opening height</b>	59.25"	26.75"	59.25"	26.75"	59.25"	26.75"
<b>Adjustable Shelves</b>	3	3	6	6	9	9
<b>Center Shelves</b>	N/A	N/A	3	3	6	6
<b>Shelf Dimensions (W x D)</b>	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"
<b>Crated Shipping Weight</b>	400 lbs.	400 lbs.	625 lbs.	625 lbs.	825 lbs.	825 lbs.
<b>Crated Shipping Dimensions (W x D x H)</b>	32" x 38" x 85"	32" x 38" x 85"	59" x 38" x 85"	59" x 38" x 85"	87" x 38" x 85"	87" x 38" x 85"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	4.3	4.3	6	6	11.8	14
<b>HACR Breaker</b>	15	15	15	15	20	20
<b>*Energy Consumption (kWh / day) ENERGY STAR / DOE</b>	3	3	5.6	3.9	3.7	8.17
<b>*Heat Rejection (BTU / hr)</b>	655	655	981	981	2,080	2,080
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Control Set Point Range</b>	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F
<b>Refrigerant</b>	R-404A	R-404A	R-404A	R-404A	R-404A	R-404A
<b>List F.O.B. Griffin</b>	<b>\$11,740</b>	<b>\$12,150</b>	<b>\$16,330</b>	<b>\$17,070</b>	<b>\$21,900</b>	<b>\$23,010</b>

\*Based on 100°F ambient cycling at set point



## PROFESSIONAL SERIES

## UPRIGHT FREEZERS



FH1-SSB



FH1-SSB-HD



FH2-SSB



FH2-SSB-HD

- Stainless steel interior and exterior
- Energy efficient thermostatic expansion valve self contained refrigeration system
- Doors are constructed of high grade stainless steel
- EverCheck™ controls with audio and visual alert



Model Number	FH1-SSB	FH1-SSB-HD	FH2-SSB	FH2-SSB-HD
Interior Storage Capacity	22.3 ft <sup>3</sup>	22.3 ft <sup>3</sup>	48 ft <sup>3</sup>	48 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 33.6" x 82.5"	27.5" x 33.6" x 82.5"	55" x 33.6" x 82.5"	55" x 33.6" x 82.5"
Depth with doors open at 90°	58.5"	58.5"	58.5"	58.5"
Interior Door opening width	21.75"	21.75"	21.75"	21.75"
Interior Door opening height	59.25"	26.75"	59.25"	26.75"
Adjustable Shelves	3	3	6	6
Center Shelves	N/A	N/A	3	3
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"
Crated Shipping Weight	400 lbs.	400 lbs.	650 lbs.	650 lbs.
Crated Shipping Dimensions (W x D x H)	32" x 38" x 85"	32" x 38" x 85"	59" x 38" x 85"	59" x 38" x 85"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	11	11	15.5	15.5
HACR Breaker	15	15	20	20
*Energy Consumption (kWh / day) ENERGY STAR / DOE	9	9.7	15.9	17.4
*Heat Rejection (BTU / hr)	2,100	2,100	3,415	3,415
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	-10° - +25°F	-10° - +25°F	-10° - +25°F	-10° - +25°F
Refrigerant	R-404A	R-404A	R-404A	R-404A
List F.O.B. Griffin	<b>\$11,520</b>	<b>\$12,430</b>	<b>\$15,960</b>	<b>\$17,190</b>

\*Based on 100°F ambient cycling at set point

## UPRIGHT DUAL TEMPS

## PROFESSIONAL SERIES



- Stainless steel interior and exterior
- Innovative Variable Speed Compressor with "adaptive control" technology
- EverCheck™ controls with audio and visual alert

- Energy efficient thermostatic expansion valve self contained refrigeration system
- Doors are constructed of high grade stainless steel



Model Number	RFH1-SSB-HSE RFH1-SSB-HS**	RFH2-SSB	RFH2-SSB-HD	RFH3-SSB	RFH3-SSB-HD
Interior Storage Capacity (ea. section)	Ref 9.1 ft <sup>3</sup> Frz 10.5 ft <sup>3</sup>	22.3 ft <sup>3</sup>	22.3 ft <sup>3</sup>	Ref 48 ft <sup>3</sup> Frz 22.3 ft <sup>3</sup>	Ref 48 ft <sup>3</sup> Frz 22.3 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 33.6" x 78" 27.5" x 33.7" x 82.5"***	55" x 33.6" x 82.5"	55" x 33.6" x 82.5"	82.5" x 33.6" x 82.5"	82.5" x 33.6" x 82.5"
Depth with doors open at 90°	58.5"	58.5"	58.5"	58.5"	58.5"
Interior Door opening width	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door opening height	26.75"	59.25"	26.75"	59.25"	26.75"
Adjustable Shelves	3	6 (3 ea.)	6 (3 ea.)	Ref 6 / Frz 3	Ref 6 / Frz 3
Center Shelves	N/A	N/A	N/A	Ref 3 / Frz 0	Ref 3 / Frz 0
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"
Crated Shipping Weight	490 lbs.	750 lbs.	750 lbs.	950 lbs.	950 lbs.
Crated Shipping Dimensions (W x D x H)	32" x 38" x 85"	59" x 38" x 85"	59" x 38" x 85"	87" x 38" x 85"	87" x 38" x 85"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	9.5	17	17	20.6	20.6
HACR Breaker	15	20	20	30	30
*Energy Consumption (kWh / day) ENERGY STAR / DOE	10	13.5	13.5	17.1	16.6
*Heat Rejection (BTU / hr)	1,630	2,580	2,580	3,035	3,035
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	Ref 36° - 50°F Frz -10° - +25°F	Ref 36° - 50°F Frz -10° - +25°F	Ref 36° - 50°F Frz -10° - +25°F	Ref 36° - 50°F Frz -10° - +25°F	Ref 36° - 50°F Frz -10° - +25°F
Refrigerant	Ref Frz R-134A   R-404A	Ref Frz R-134A   R-404A	Ref Frz R-134A   R-404A	Ref Frz R-134A   R-404A	Ref Frz R-134A   R-404A
List F.O.B. Griffin	<b>\$16,110</b> <b>\$16,110**</b>	<b>\$20,050</b>	<b>\$21,840</b>	<b>\$26,870</b>	<b>\$28,820</b>

\*\*SPECIAL ORDER - Please contact your local Hoshizaki Sales Representative for availability.

\*Based on 100°F ambient cycling at set point



## PROFESSIONAL SERIES

## UPRIGHT PASS THRU



PTR1SSE-FSFS



PTR1SSE-HSHS



PTR1SSE-FGFG



PTR1SSE-HGHG



PTR1SSE-HGHS

- Stainless steel interior and exterior
- Innovative Variable Speed Compressor with "adaptive control" technology
- EverCheck™ controls with audio and visual alert
- Energy efficient thermostatic expansion valve self contained refrigeration system
- Door glass is triple pane, argon filled with Low-E non-reflective coating



Model Number	PTR1SSE-FSFS	PTR1SSE-HSHS	PTR1SSE-FGFG	PTR1SSE-HGHG	PTR1SSE-HGHS
Interior Storage Capacity	23.8 ft <sup>3</sup>	23.8 ft <sup>3</sup>	23.8 ft <sup>3</sup>	23.8 ft <sup>3</sup>	23.8 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 35.9" x 82.5"	27.5" x 35.9" x 82.5"	27.5" x 35.9" x 82.5"	27.5" x 35.9" x 82.5"	27.5" x 35.9" x 82.5"
Depth with doors open at 90°	85.9"	85.9"	84.7"	84.7"	85.1"
Interior Door opening width	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door opening height	59.25"	26.75"	59.25"	26.75"	26.75"
Adjustable Shelves	3	3	3	3	3
Center Shelves	N/A	N/A	N/A	N/A	N/A
Shelf Dimensions (W x D)	21.2" x 30.75"	21.2" x 30.75"	21.2" x 30.75"	21.2" x 30.75"	21.2" x 30.75"
Crated Shipping Weight	475 lbs.	475 lbs.	475 lbs.	475 lbs.	475 lbs.
Crated Shipping Dimensions (W x D x H)	32" x 38" x 85"	32" x 38" x 85"	32" x 38" x 85"	32" x 38" x 85"	32" x 38" x 85"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	12	12	12	12	12
HACR Breaker	15	15	15	15	15
*Energy Consumption (kWh / day) ENERGY STAR / DOE	4.2	4.2	4.4	4.5	4.5
*Heat Rejection (BTU / hr)	1,700	1,700	2,630	2,630	2,273
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F
Refrigerant	R-404A	R-404A	R-404A	R-404A	R-404A
List F.O.B. Griffin	<b>\$14,870</b>	<b>\$16,000</b>	<b>\$16,750</b>	<b>\$17,540</b>	<b>\$16,620</b>

\*Based on 100°F ambient cycling at set point



## UPRIGHT PASS THRU

## PROFESSIONAL SERIES



**PTR2SSE-FSFS**



**PTR2SSE-HSHS**



**PTR2SSB-FGFG**



**PTR2SSB-HGHG**

- Stainless steel interior and exterior
- Cabinet and doors are foamed with R-134A CFC-free polyurethane foam
- Door glass is triple pane, argon filled with Low-E non-reflective coating

- Ducted air distribution system for uniform cabinet temperature eliminating "hot spots"
- Doors are constructed of high grade stainless steel
- EverCheck™ controls with audio and visual alert

Model Number	PTR2SSE-FSFS	PTR2SSE-HSHS	PTR2SSB-FGFG	PTR2SSB-HGHG
Interior Storage Capacity	51.3 ft <sup>3</sup>	51.3 ft <sup>3</sup>	51.3 ft <sup>3</sup>	51.3 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" adj. legs)	55" x 35.9" x 84.5"	55" x 35.9" x 84.5"	55" x 35.9" x 84.5"	55" x 35.9" x 84.5"
Depth with doors open at 90°	85.9"	85.9"	85.9"	85.9"
Interior Door opening width	21.75"	21.75"	21.75"	21.75"
Interior Door opening height	59.25"	26.75"	59.25"	26.75"
Adjustable Shelves	6	6	6	6
Center Shelves	3	3	3	3
Shelf Dimensions (W x D)	21.2" x 30.75"	21.2" x 30.75"	21.2" x 30.75"	21.2" x 30.75"
Crated Shipping Weight	700 lbs.	700 lbs.	700 lbs.	700 lbs.
Crated Shipping Dimensions (W x D x H)	59" x 39" x 85"	59" x 39" x 85"	59" x 39" x 85"	59" x 39" x 85"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	12	12	12	12
HACR Breaker	15	15	15	15
*Energy Consumption (kWh / day) ENERGY STAR / DOE	6.3	6.3	16.6	16.6
*Heat Rejection (BTU / hr)	2,360	2,360	2,360	2,360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	+36° - +50°F	+36° - +50°F	+36° - +50°F	+36° - +50°F
Refrigerant	R-404A	R-404A	R-404A	R-404A
List F.O.B. Griffin	<b>\$21,240</b>	<b>\$22,620</b>	<b>\$24,810</b>	<b>\$26,120</b>

\*Based on 100°F ambient cycling at set point



## PROFESSIONAL SERIES

## UPRIGHT ROLL-INS



**RIR1-SSB**



**RIR2-SSB**

- Stainless steel interior and exterior
- Cabinet and doors are foamed with R-134A CFC-free polyurethane foam
- Ducted air distribution system for uniform cabinet temperature eliminating "hot spots"
- Doors are constructed of high grade stainless steel
- EverCheck™ controls with audio and visual alert

Model Number	RIR1-SSB	RIR2-SSB
Interior Storage Capacity	37.7 ft <sup>3</sup>	77.3 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" for Ramp)	35" x 38.4" x 90.5"	68" x 38.4" x 90.5"
Depth with doors open at 90°	65"	65"
Door opening width	29.4"	29.4"
Door opening height	72.8"	72.8"
Adjustable Shelves	N/A	N/A
Center Shelves	N/A	N/A
Maximum Rack Size (WxDxH) (Rack by others)	27" x 29" x 72"	27" x 29" x 72"
Crated Shipping Weight	500 lbs.	825 lbs.
Crated Shipping Dimensions (W x D x H)	39" x 40.75" x 95.4"	72" x 40.75" x 95.4"
Voltage	115V/60/1	115V/60/1
Amperage	7	7
HACR Breaker	15	15
*Energy Consumption (kWh / day) ENERGY STAR / DOE	5.5	8.30
*Heat Rejection (BTU / hr)	1,135	1,717
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Control Set Point Range	+36° - +50°F	+36° - +50°F
Refrigerant	R-404A	R-404A
List F.O.B. Griffin	<b>\$13,840</b>	<b>\$19,920</b>

\*Based on 100°F ambient cycling at set point

## UPRIGHT HOT FOOD HOLDING CABINETS

## PROFESSIONAL SERIES



**HH1-SSB-FS**



**HH1-SSB-HS**

- Stainless steel interior and exterior
- High density fiberglass insulation in cabinet top, sides, back, bottom and doors
- Easy to use LED digital controller (fahrenheit or celsius) with separate on/off switch, high/low temperature alarms
- Innovative ducted air distribution system eliminates hot and cold spots in cabinet
- Universal tray slides (13 sets) standard
- Self closing all stainless steel doors with locks

Model Number	HH1-SSB-FS	HH1-SSB-HS
Interior Storage Capacity	24.9 ft <sup>3</sup>	24.9 ft <sup>3</sup>
Overall Dimensions (W x D x H including 5" casters)	27.5" x 33.75" x 84.5"	27.5" x 33.75" x 84.5"
Depth with doors open at 90°	58.6"	58.6"
Door opening width	22"	22"
Door opening height	27"	27"
Tray Slides	13 Sets	13 Sets
Crated Shipping Weight	475 lbs.	475 lbs.
Crated Shipping Dimensions (W x D x H)	32" x 38" x 85"	32" x 38" x 85"
Voltage	115V/60/1	115V/60/1
Amperage	14.2	14.2
HACR Breaker	20	20
*Energy Consumption (kWh / day) ENERGY STAR / DOE	11.08	11.08
*Heat Rejection (BTU / hr)	N/A	N/A
Voltage Range	110 - 120	110 - 120
Ambient Temp. Range	45° - 100°F	45° - 100°F
Control Set Point Range	90° - 190°F	90° - 190°F
List F.O.B. Griffin	<b>\$11,780</b>	<b>\$12,040</b>

\*Based on 100°F ambient cycling at set point



## PROFESSIONAL SERIES

## UNDERCOUNTER REFRIGERATORS



**HUR40A**



**HUR68A**



**HUR96A**



**HUR40A-D**



**HUR68A-D**



**HUR96A-D**

- Stainless steel interior and exterior top, front, sides and bottom - galvanized back
- Cabinet and doors are foamed with CFC-free polyurethane foam
- EverCheck™ controls
- Removable cartridge style refrigeration system
- Doors and drawer fronts are constructed of high-grade stainless steel inside and out
- 4" Heavy duty casters standard

Model Number	HUR40A	HUR68A	HUR96A	HUR40A-D	HUR68A-D	HUR96A-D
<b>Interior Storage Capacity</b>	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>	29.1 ft <sup>3</sup>	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>	29.1 ft <sup>3</sup>
<b>Overall Dimensions (W x D x H including 4" casters)</b>	40.25" x 32.3" x 33.9"	68" x 32.3" x 33.9"	95.8" x 32.3" x 33.9"	40.25" x 32.3" x 33.9"	68" x 32.3" x 33.9"	95.8" x 32.3" x 33.9"
<b>Depth with doors open at 90° -OR- drawers fully open</b>	56.8"	56.8"	56.8"	58.1"	58.1"	58.1"
<b>Interior Door opening width</b>	22.5"	22.5"	22.5"	N/A	N/A	N/A
<b>Interior Door opening height</b>	24.3"	24.3"	24.3"	9.9"	9.9"	9.9"
<b>Adjustable Shelves</b>	1	2	3	1	N/A	N/A
<b>Center Shelves</b>	N/A	N/A	N/A	N/A	N/A	N/A
<b>Shelf Dimensions (W x D)</b>	22.4" x 24.6"	25" x 24.6"	25.9" x 24.6"	N/A	N/A	N/A
<b>Crated Shipping Weight</b>	312 lbs.	435 lbs.	558 lbs.	317 lbs.	546 lbs.	725 lbs.
<b>Crated Shipping Dimensions (W x D x H)</b>	44.25" x 36.25" x 39.5"	72" x 36.25" x 39.5"	99.8" x 36.25" x 39.5"	44.25" x 36.25" x 39.5"	72" x 36.25" x 39.5"	99.8" x 36.25" x 39.5"
<b>Voltage</b>	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
<b>Amperage</b>	5	5	6	5.8	5	6
<b>HACR Breaker</b>	15	2.77	15	15	15	15
<b>*Energy Consumption (kWh / day) ENERGY STAR / DOE</b>	2.4	2.8	4.5	4.97	4.9	6
<b>*Heat Rejection (BTU / hr)</b>	449	638	740	449	695	740
<b>Voltage Range</b>	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
<b>Ambient Temp. Range</b>	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
<b>Control Set Point Range</b>	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F
<b>Refrigerant</b>	R-134A	R-134A	R-134A	R-134A	R-134A	R-134A
<b>List F.O.B. Griffin</b>	<b>\$7,130</b>	<b>\$9,150</b>	<b>\$13,080</b>	<b>\$9,800</b>	<b>\$14,520</b>	<b>\$21,540</b>

\*Based on 100°F ambient cycling at set point

## UNDERCOUNTER FREEZERS

## PROFESSIONAL SERIES



**HUF40A**



**HUF68A**



**HUF40A-D**



**HUF68A-D**

- Stainless steel interior and exterior top, front, sides and bottom - galvanized back
- Cabinet and doors are foamed with CFC-free polyurethane foam
- EverCheck™ controls

- Removable cartridge style refrigeration system
- Doors and drawer fronts are constructed of high-grade stainless steel inside and out
- 4" Heavy duty casters standard

Model Number	HUF40A	HUF68A	HUF40A-D	HUF68A-D
Interior Storage Capacity	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	40.25" x 32.3" x 33.9"	68" x 32.3" x 33.9"	40.25" x 32.3" x 33.9"	68" x 32.3" x 33.9"
Depth with doors open at 90° -OR- drawers fully open	58.1"	58.1"	58.1"	58.1"
Interior Door opening width	22.5"	22.5"	N/A	N/A
Interior Door opening height	9.9"	9.9"	9.9"	9.9"
Adjustable Shelves	2	4	N/A	N/A
Center Shelves	N/A	N/A	N/A	N/A
Shelf Dimensions (W x D)	22.4" x 24.6"	25" x 24.6"	N/A	N/A
Crated Shipping Weight	375 lbs.	546 lbs.	375 lbs.	553 lbs.
Crated Shipping Dimensions (W x D x H)	44.25" x 36.25" x 39.5"	72" x 36.25" x 39.5"	44.25" x 36.25" x 39.5"	72" x 36.25" x 39.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	5	5	5.5	10
HACR Breaker	15	15	15	15
*Energy Consumption (kWh / day) ENERGY STAR / DOE	3.2	4.9	8.9	14.8
*Heat Rejection (BTU / hr)	449	695	1,267	1,791
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	-13° - +19°F	-13° - +19°F	-13° - +19°F	-13° - +19°F
Refrigerant	R-404A	R-404A	R-404A	R-404A
List F.O.B. Griffin	<b>\$8,390</b>	<b>\$10,810</b>	<b>\$11,070</b>	<b>\$17,270</b>

\*Based on 100°F ambient cycling at set point



## PROFESSIONAL SERIES

## WORKTOP REFRIGERATORS



**HWR40A**



**HWR68A**



**HWR96A**



**HWR40A-D**



**HWR68A-D**



**HWR96A-D**

- Stainless steel interior and exterior top, front, sides and bottom - galvanized back
- Cabinet and doors are foamed with CFC-free polyurethane foam
- Doors and drawer fronts are constructed of high-grade stainless steel inside and out
- Top includes 4" backsplash
- EverCheck™ controls
- Removable cartridge style refrigeration system
- 6" Heavy duty casters standard

Model Number	HWR40A	HWR68A	HWR96A	HWR40A-D	HWR68A-D	HWR96A-D
Interior Storage Capacity	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>	29.1 ft <sup>3</sup>	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>	29.1 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	40.25" x 32.3" x 39.9"	68" x 32.3" x 39.9"	95.8" x 32.3" x 39.9"	40.25" x 32.3" x 39.9"	68" x 32.3" x 39.9"	95.8" x 32.3" x 39.9"
Depth with doors open at 90° -OR- drawers fully open	56.8"	56.8"	56.8"	58.1"	58.1"	58.1"
Interior Door opening width	22.5"	22.5"	22.5"	N/A	N/A	N/A
Interior Door opening height	24.3"	24.3"	24.3"	9.9"	9.9"	9.9"
Adjustable Shelves	2	4	6	N/A	N/A	N/A
Center Shelves	N/A	N/A	N/A	N/A	N/A	N/A
Shelf Dimensions (W x D)	22.4" x 24.6"	22.4" x 24.6"	25.9" x 24.6"	N/A	N/A	N/A
Crated Shipping Weight	317 lbs.	443 lbs.	561 lbs.	375 lbs.	554 lbs.	734 lbs.
Crated Shipping Dimensions (W x D x H)	44.25" x 36.25" x 43.25"	72" x 36.25" x 43.25"	99.8" x 36.25" x 43.25"	44.25" x 36.25" x 43.25"	72" x 36.25" x 43.25"	99.8" x 36.25" x 43.25"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	5	5	6	5	5	6
HACR Breaker	15	15	15	15	15	15
*Energy Consumption (kWh / day) ENERGY STAR / DOE	2.4	2.77	4.5	3.2	4.9	6
*Heat Rejection (BTU / hr)	449	638	740	449	695	852
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F
Refrigerant	R-134A	R-134A	R-134A	R-134A	R-134A	R-134A
List F.O.B. Griffin	<b>\$7,450</b>	<b>\$9,600</b>	<b>\$13,990</b>	<b>\$10,110</b>	<b>\$14,960</b>	<b>\$22,500</b>

\*Based on 100°F ambient cycling at set point

## WORKTOP FREEZERS

## PROFESSIONAL SERIES



**HWF40A**



**HWF68A**



**HWF40A-D**



**HWF68A-D**

- Stainless steel interior and exterior top, front, sides and bottom - galvanized back
- Cabinet and doors are foamed with CFC-free polyurethane foam
- Doors and drawer fronts are constructed of high-grade stainless steel inside and out
- Top includes 4" backsplash
- EverCheck™ controls
- Removable cartridge style refrigeration system
- 6" Heavy duty casters standard

Model Number	HWF40A	HWF68A	HWF40A-D	HWF68A-D
Interior Storage Capacity	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	40.25" x 32.3" x 39.9"	68" x 32.3" x 39.9"	40.25" x 32.3" x 39.9"	68" x 32.3" x 39.9"
Depth with doors open at 90° -OR- drawers fully open	56.8"	56.8"	58.1"	58.1"
Interior Door opening width	22.5"	22.5"	N/A	N/A
Interior Door opening height	24.3"	24.3"	9.9"	9.9"
Adjustable Shelves	2	4	N/A	N/A
Center Shelves	N/A	N/A	N/A	N/A
Shelf Dimensions (W x D)	22.4" x 24.6"	25" x 24.6"	N/A	N/A
Crated Shipping Weight	322 lbs.	450 lbs.	380 lbs.	561 lbs.
Crated Shipping Dimensions (W x D x H)	44.25" x 36.25" x 43.25"	72" x 36.25" x 43.25"	44.25" x 36.25" x 43.25"	72" x 36.25" x 43.25"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	5.5	10	5.5	10
HACR Breaker	15	15	15	15
*Energy Consumption (kWh / day) ENERGY STAR / DOE	4.97	9.45	8.9	14.8
*Heat Rejection (BTU / hr)	1,133	1,708	1,267	1,791
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	-13° - +19°F	-13° - +19°F	-13° - +19°F	-13° - +19°F
Refrigerant	R-404A	R-404A	R-404A	R-404A
List F.O.B. Griffin	<b>\$8,720</b>	<b>\$11,230</b>	<b>\$11,390</b>	<b>\$17,660</b>

\*Based on 100°F ambient cycling at set point



## PROFESSIONAL SERIES

## PREP TABLES



HPR46A



HPR72A



HPR46A-D



HPR72A-D

- Stainless steel interior and exterior top, front, sides and bottom - galvanized back
- Exclusive "Night Switch" control setting allows over night product storage in rail with cover closed
- Drawer fronts are constructed of high-grade stainless steel inside and out
- 4" Heavy duty casters standard
- Refrigerated rails is mechanically cooled and is equipped with a 1" drain
- Doors are constructed of high-grade stainless steel inside and out
- EverCheck™ controls

Model Number	HPR46A	HPR72A	HPR46A-D	HPR72A-D
Interior Storage Capacity	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>	8.5 ft <sup>3</sup>	18.8 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	46" x 32.3" x 44.8"	72" x 32.3" x 44.8"	46" x 32.3" x 44.8"	72" x 32.3" x 44.8"
Depth with doors open at 90° / Depth with drawer fully open (-D)	56.8"	56.8"	58.1"	58.1"
Door opening width	22.5"	22.5"	22.5"	22.5"
Door opening height / Drawer opening height (-D)	24.3"	24.3"	9.9"	9.9"
Adjustable Shelves	1	2	N/A	N/A
Shelf Dimensions (W x D)	22.4" x 24.6"	22.4" x 24.6"	N/A	N/A
Crated Shipping Weight	373 lbs.	585 lbs.	431 lbs.	696 lbs.
Crated Shipping Dimensions (W x D x H)	50" x 36.25" x 51.8"	76" x 36.25" x 51.8"	50" x 36.25" x 51.8"	76" x 36.25" x 51.8"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage	7.6	13.6	7.6	13.6
HACR Breaker	15	20	15	20
*Energy Consumption (kWh / day) ENERGY STAR / DOE	7.3	13.9	7.3	16
*Heat Rejection (BTU / hr)	1,044	1,976	1,043.5	2,275
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 86°F	45° - 86°F	45° - 86°F	45° - 86°F
Control Set Point Range (Base)	+21° - +53°F	+21° - +53°F	+21° - +53°F	+21° - +53°F
Control Set Point Range (Rail)	-13° - +53°F	-13° - +53°F	-13° - +53°F	-13° - +53°F
Refrigerant	R-404A	R-404A	R-404A	R-404A
Accessories (See page 40-43 for prices)	HS-4010 HS-4009	HS-4011 HS-4009	HS-4010 HS-4009 HS-4007	HS-4011 HS-4009 HS-4007
List F.O.B. Griffin	<b>\$12,270</b>	<b>\$14,010</b>	<b>\$15,080</b>	<b>\$18,830</b>

\*Based on 100°F ambient cycling at set point



### Features & Benefits of Hoshizaki Display Cases

- **HNC Sushi Cases** feature five models to choose from providing a wide selection for displaying
- Cases are refrigerated and contain a larger condenser face, improving cooling performance
- Self-contained refrigeration unit - ease of installation
- NSF approved thermometer
- Plate space on top of unit, 5.6 inches
- Large diameter 1" drain at front, vinyl hose included
- Larger front to back interior, 11" depth
- Full length front glass angles down for an attractive display of items
- Easy to clean ceiling



**HNC-210BA-R-S**

Model Number	Condenser	Refrigeration Unit Location (Front View)	Dimensions W x D x H	Electrical	Shipping Weight	List F.O.B. Griffin
<b>HNC-120BA-R-S</b>	Air-Cooled	Right Side	47 1/4 x 13 5/8 x 11	115V/60/1	90 Lbs.	<b>\$4,290</b>
<b>HNC-120BA-L-S</b>	Air-Cooled	Left Side	47 1/4 x 13 5/8 x 11	115V/60/1	90 Lbs.	<b>\$4,290</b>
<b>HNC-150BA-R-S</b>	Air-Cooled	Right Side	59 1/16 x 13 5/8 x 11	115V/60/1	105 Lbs.	<b>\$4,640</b>
<b>HNC-150BA-L-S</b>	Air-Cooled	Left Side	59 1/16 x 13 5/8 x 11	115V/60/1	105 Lbs.	<b>\$4,640</b>
<b>HNC-180BA-R-S</b>	Air-Cooled	Right Side	70 7/8 x 13 5/8 x 11	115V/60/1	120 Lbs.	<b>\$5,190</b>
<b>HNC-180BA-L-S</b>	Air-Cooled	Left Side	70 7/8 x 13 5/8 x 11	115V/60/1	120 Lbs.	<b>\$5,190</b>
<b>HNC-210BA-R-S</b>	Air-Cooled	Right Side	82 11/16 x 13 5/8 x 11	115V/60/1	135 Lbs.	<b>\$5,750</b>
<b>HNC-210BA-L-S</b>	Air-Cooled	Left Side	82 11/16 x 13 5/8 x 11	115V/60/1	135 Lbs.	<b>\$5,750</b>


"R" - Condensing Unit is on RIGHT from front view

"L" - Condensing Unit is on LEFT from front view


Not intended for overnight storage. NSF Standard 7



**HNC-120BA-L-S**

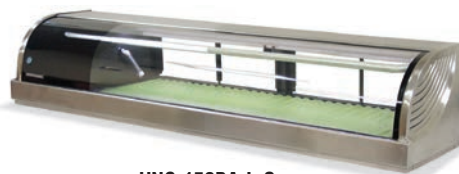


**HNC-150BA-L-S**

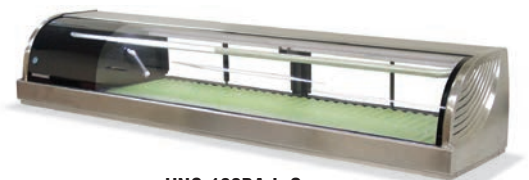


**HNC-180BA-L-S**



## REFRIGERATION ACCESSORIES




**CASTERS**




**FOOT PEDAL  
DOOR OPENER**



**SHELVES**

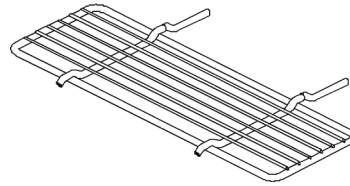

**CENTER SHELVES**



**TRAY / PAN SLIDES**

### PROFESSIONAL SERIES CASTERS & LEGS

Model Number	Description	List F.O.B. Griffin
HS-3546	<b>4" Casters</b> - Set of four, two with brakes	<b>\$330</b>
HS-3547	<b>4" Casters</b> - Set of six, three with brakes (3 section SSB Reach-Ins only)	<b>\$510</b>
HS-3511	<b>6" Legs</b> - Set of two (3 Section Uprights)	<b>\$130</b>
HS-3512	<b>6" Legs</b> - Set of four (1/2/3 Section Uprights)	<b>\$190</b>
HS-3712	<b>2.8" Casters</b> - Set of four, two with brakes (1 & 2 Section Undercounters)	<b>\$290</b>
HS-3713	<b>2.8" Casters</b> - Set of six, three with brakes (3 Section Undercounters)	<b>\$330</b>
HS-3714	<b>6" Legs</b> - Set of four (1 & 2 Section Undercounters)	<b>\$180</b>
HS-3715	<b>6" Legs</b> - Set of six (3 Section Undercounters)	<b>\$240</b>
HS-3719	<b>6" Casters</b> - Set of four, two with brakes (1 & 2 Section Undercounters)	<b>\$290</b>
HS-3720	<b>6" Casters</b> - Set of six, three with brakes (3 Section Undercounters)	<b>\$340</b>

### COMMERCIAL SERIES CASTERS & LEGS

Model Number	Description	List F.O.B. Griffin
HS-5035	<b>4" Casters</b> - Set of four, two with brakes (1, 2 & 3 Section Horizontal Units)	<b>\$90</b>
HS-5036	<b>6" Casters</b> - Set of four, two with brakes (1, 2 & 3 Section Horizontal Units)	<b>\$120</b>
HS-5037	<b>2.25" Casters</b> - Set of four, two with brakes (1 & 2 Section Undercounters) Casters for ADA Compliant dimensions	<b>\$100</b>
HS-5066	<b>6" Legs</b> - Set of four (Undercounters)	<b>\$130</b>

### PROFESSIONAL SERIES FOOT PEDALS

Model Number	Description	List F.O.B. Griffin
HS-3513	One Door Foot Pedal	<b>\$240</b>
HS-3514	Two Door Foot Pedal	<b>\$430</b>

### COMMERCIAL SERIES FOOT PEDALS

Model Number	Description	List F.O.B. Griffin
HS-3721	One Door Foot Pedal - Left Hand Hinge	<b>\$250</b>
HS-3722	One Door Foot Pedal - Right Hand Hinge	<b>\$250</b>
HS-3723	Two Door Foot Pedal	<b>\$420</b>

## REFRIGERATION ACCESSORIES

### PROFESSIONAL SERIES DOOR REVERSAL KIT

Model Number	Description	List F.O.B. Griffin
HS-3527	Door Reversal Kit - Full Door (Right to Left)	\$230
HS-3528	Door Reversal Kit - Full Door (Left to Right)	\$230
HS-3529	Door Reversal Kit - Half Door (Right to Left)	\$280
HS-3530	Door Reversal Kit - Half Door (Left to Right)	\$280

### COMMERCIAL SERIES DOOR REVERSAL KIT

Model Number	Description	List F.O.B. Griffin
HS-3725	Door Reversal Kit - Half door S-Series (Right to Left) Door Reversal Kit - Full door S-Series (Left to Right)	\$100
HS-3726	Door Reversal Kit - Half door S-Series (Left to Right) Door Reversal Kit - Full door S-Series (Right to Left)	\$100
HS-5176	Door Reversal Kit - Full Glass Door S-Series FGY Models (Left to Right)	\$260
HS-5177	Door Reversal Kit - Full Glass Door S-Series FGY Models (Right to Left)	\$260

### PROFESSIONAL SERIES FULL SHELVES AND TRAY / PAN RACK SLIDES

Model Number	Description	List F.O.B. Griffin
HS-3507	Epoxy Shelf	\$100
HS-3502	Stainless Steel Shelf	\$290
HS-3551	Epoxy Shelf (For all Pass Thru units)	\$190
HS-3553	Stainless Steel Shelf (PTRX-SSB Pass Thru)	\$320
HS-3561	Epoxy Shelf (2 or 3 Section Undercounter, Worktop and Raised Rail Prep Tables)	\$160
HS-3563	Epoxy Shelf (1 Section Undercounter, Worktop and Raised Rail Prep Tables)	\$160

### COMMERCIAL SERIES FULL SHELVES

Model Number	Description	List F.O.B. Griffin
HS-5052	Industrial Strength Epoxy Shelf (1 Section Uprights)	\$120
HS-5053	Industrial Strength Epoxy Shelf, 3 each (1 Section Uprights)	\$240
HS-5054	Industrial Strength Stainless Steel Shelf (1 Section Uprights)	\$250
HS-5047	Industrial Strength Epoxy Shelf (2 Section Uprights)	\$120
HS-5048	Industrial Strength Epoxy Shelf, 3 each (2 Section Uprights)	\$240
HS-5049	Industrial Strength Stainless Steel Shelf (2 Section Uprights)	\$270
HS-5058	Epoxy Shelf (All 27" and 72" Undercounters, Worktops and Prep Tables)	\$80
HS-5059	Epoxy Shelf (All 48" Undercounters, Worktops and Prep Tables)	\$80
HS-5108	Epoxy Shelf (All 60" Undercounters, Worktops and Prep Tables)	\$100
HS-5116	Stainless Steel Shelf (All 27" and 72" Undercounters, Worktops and Prep Tables)	\$190
HS-5151	Epoxy Shelf for CPT67/93	\$160
HS-5152	Epoxy Shelf for CPT46	\$160
HS-5153	Stainless Steel Shelf for CPT67/93	\$290
HS-5154	Stainless Steel Shelf for CPT46	\$290



## REFRIGERATION ACCESSORIES

### PROFESSIONAL SERIES CENTER SHELVES

Model Number	Description	List F.O.B. Griffin
HS-3509	Epoxy Center Shelf (Professional Series SSB / SSE only)	\$140
HS-3504	Stainless Steel Center Shelf (Professional Series SSB / SSE only)	\$400

### TRAY / PAN SLIDES

(16) Sets on 3" Centers per section is the recommended maximum capacity for Professional and Commercial Uprights. Units can hold as many as (24) sets on 2" Centers per section.

Model Number	Description	List F.O.B. Griffin
HS-3557	Stainless Steel Bottom Support Universal Pan Slides (1 Set)* (Professional or Commercial Series Uprights)	\$150
HS-3558	Stainless Steel Bottom Support Universal Pan Slides (4 Sets)* (Professional or Commercial Series Uprights)	\$490
HS-5092	Stainless Steel Bottom Support Wire Tray Slides (1 Set) Medium Duty for 18x26 Baker Pan (1/4 Diameter and Welded Wire)	\$110
HS-5093	Stainless Steel Bottom Support Wire Tray Slides (4 Sets) Medium Duty for 18x26 Baker Pan Only (1/4 Diameter and Welded Wire)	\$350
HS-5167	Pan Slide Conversion Kit 2-Section <b>S Series</b> *Tray / Pan slides accommodate: (1) Baker Pan: Width - 177/8" to 18" X Length - 253/4" to 267/8" or (2) Hotel Pans: Width - 127/8" to 13" X Length - 203/4" to 207/8"	\$120
HS-3559	Tray / Pan Rack Slides - Accommodates (7) 18" x 26" Pans (Professional Series Undercounters, Work Tops and Prep Tables)	\$550

### PROFESSIONAL SERIES SECURITY COMPONENTS

Model Number	Description	List F.O.B. Griffin
HS-3531	Padlock Hasp for 2 Section Uprights	\$420
HS-3543	Padlock Hasp for 1 Section, Hinged Left	\$290
HS-3544	Padlock Hasp for 1 Section, Hinged Right	\$290

### COMMERCIAL SERIES AIR FILTERS

Model Number	Description	List F.O.B. Griffin
HS-5007	Air Filter (1 Section)	\$70
HS-5008	Air Filter (2 Section)	\$70
HS-5009	Air Filter (3 Section)	\$90

### MISCELLANEOUS ACCESSORIES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-3706**	Stainless Steel Back - 40" Long	Professional Series Undercounter	\$460
HS-3707**	Stainless Steel Back - 68" Long	Professional Series Undercounter	\$570
HS-3708**	Stainless Steel Back - 96" Long	Professional Series Undercounter	\$690
HS-3709**	Stainless Steel Back - 40" Long	Professional Series Worktop	\$480
HS-3710**	Stainless Steel Back - 68" Long	Professional Series Worktop	\$600
HS-3711**	Stainless Steel Back - 96" Long	Professional Series Worktop	\$710
HS-4007	Drawer Assembly Divider Bar (Accommodates 1/2, 1/3 and 1/6 Size Pans)	Professional Series Undercounters, Worktops & Prep Tables with Drawers	\$30
HS-4009	12" Rail Divider Bar	Professional Series Prep Table	\$20
HS-4010	46" x 16" x 1/2" Cutting Board for Prep Table	Professional Series Prep Table	\$330
HS-4011	72" x 16" x 1/2" Cutting Board for Prep Table	Professional Series Prep Table	\$430
HS-4511**	Double Sided Bull Nose Top - 40" Long	Professional Series Undercounter & Worktop	\$450
HS-4512**	Double Sided Bull Nose Top - 68" Long	Professional Series Undercounter & Worktop	\$570
HS-4513**	Double Sided Bull Nose Top - 96" Long	Professional Series Undercounter & Worktop	\$730

## REFRIGERATION ACCESSORIES

### MISCELLANEOUS ACCESSORIES

Model Number	Description	For Use With	List F.O.B. Griffin
<b>HS-4007</b>	Drawer Assembly Divider Bar (Accommodates 1/2, 1/3 and 1/6 Size Pans)	Commercial Series Undercounters, Worktops, Prep Tables with Drawers & CRES Models	<b>\$30</b>
<b>HS-4009</b>	12" Rail Divider Bar	Commercial Series Prep Table	<b>\$20</b>
<b>HS-5067</b>	Mega Top Rail Adapter Bar - 20" x 1.0" (Front to Back)	Commercial Series Sandwich Top & Mega Top	<b>\$20</b>
<b>HS-5068</b>	Sandwich Top Rail Adapter Bar - 13.7" x 1.0" (Left to Right)	Commercial Series Sandwich Top & Mega Top	<b>\$20</b>
<b>HS-5069</b>	Sandwich Top Rail Adapter Bar - 12.6" x 1.0" (Front to Back)	Commercial Series Sandwich Top & Mega Top	<b>\$20</b>
<b>HS-5075</b>	Stainless Back - 27" Horizontal Models (Factory Installed Only)	Commercial Series Sandwich Top & Mega Top	<b>\$330</b>
<b>HS-5076</b>	Stainless Back - 48" Horizontal Models (Factory Installed Only)	Commercial Series Sandwich Top & Mega Top	<b>\$430</b>
<b>HS-5085</b>	Stainless Back - 60" Horizontal Models (Factory Installed Only)	Commercial Series Sandwich Top & Mega Top	<b>\$490</b>
<b>HS-5086</b>	Stainless Back - 72" Horizontal Models (Factory Installed Only)	Commercial Series Sandwich Top & Mega Top	<b>\$560</b>
<b>HS-5112</b>	Stacking Kit - CRMR27 & CRMF27	Commercial Series Undercounters	<b>\$350</b>
<b>HS-5170</b>	Stainless Back - 60" Sandwich and Mega Top Only (Factory Installed Only)	Commercial Series Sandwich Top & Mega Top	<b>\$490</b>

### MISCELLANEOUS ACCESSORIES - FLAT LIFT OFF COVER

Model Number	Description	For Use With	List F.O.B. Griffin
<b>HS-5070</b>	Flat Lift-Off Stainless Steel Cover - 12 pan Mega Top opening	CRMR27-12M, CRMR48-12M, CRMR60-12M *CRMR60-24M, *CRMR72-24M, CRMR27-12MD *CRMR60-24MD4 (*2 of each cover required per model)	<b>\$250</b>
<b>HS-5071</b>	Flat Lift-Off Stainless Steel Cover - 18 pan Mega Top opening	CRMR48-18M, CRMR60-18M, CRMR72-18M CRMR48-18MD4	<b>\$250</b>
<b>HS-5072</b>	Flat Lift-Off Stainless Steel Cover - CRMR27-8	CRMR27-8, CRMR27-8D	<b>\$250</b>
<b>HS-5073</b>	Flat Lift-Off Stainless Steel Cover - CRMR48-8	CRMR48-8, CRMR60-8	<b>\$250</b>
<b>HS-5074</b>	Flat Lift-Off Stainless Steel Cover - 12 pan Sandwich Top opening	CRMR48-12, CRMR48-12MD4, CRMR60-12 CRMR72-12	<b>\$250</b>
<b>HS-5106</b>	Flat Lift-Off Stainless Steel Cover - CRMR60-16, CRMR72-16	CRMR60-16, CRMR27-16	<b>\$310</b>
<b>HS-5107</b>	Flat Lift-Off Stainless Steel Cover - CRMR72-18	CRMR72-18	<b>\$310</b>
<b>HS-5070 + HS-5071</b>	Flat Lift-Off Stainless Steel Cover - 12 pan Mega Top opening Flat Lift-Off Stainless Steel Cover - 18 pan Mega Top opening	CRMR72-30M, CRMR72-30M6 (1 of each cover required per model)	<b>\$250</b> <b>(Each Cover)</b>

**\*\*SPECIAL ORDER - Please contact your local Hoshizaki Sales Representative for availability.**



## **HOSHIZAKI AMERICA, INC.**

618 Hwy. 74, South, Peachtree City, GA 30269

TEL 800-438-6087 | FAX 800-345-1325

[hoshizakiamerica.com](http://hoshizakiamerica.com)

**“A SUPERIOR DEGREE OF RELIABILITY”**

©2016 Hoshizaki America, Inc.

Item #11500 | 02-01-16

