




15-20 Minute Check Out “G & J & K” Board

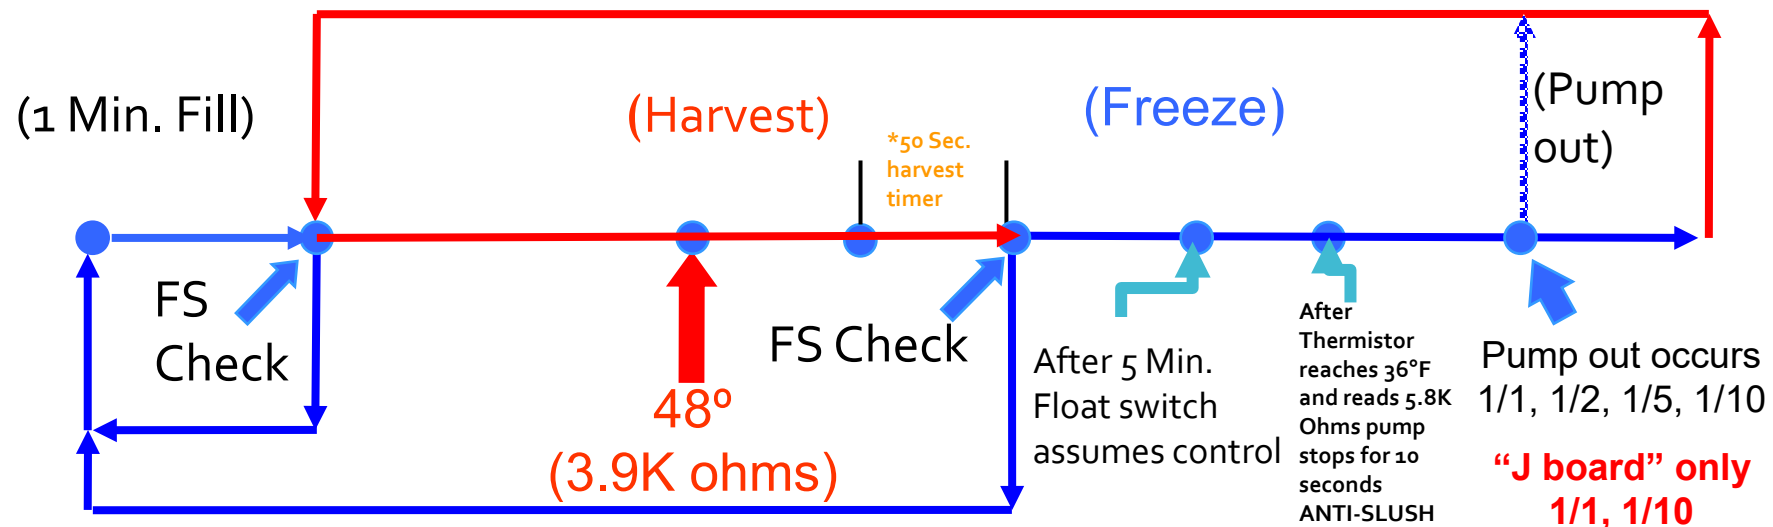

- “G” board – change S4 Dip switches 5+6 to OFF = 1/1 pump out
- “J & K” board – change S4 Dip switch 5 to ON = 1/1 pump out
- Turn unit off then back on
- “G” board after 5 min. in the freeze cycle drain water and allow float switch to open, unit will go to harvest after 15-20 sec. delay(verifies float operation)
- “J & K” board let unit go past 5 min. and wait for the pump to shut off for 10 seconds (verifies Anti-slush), then drain water and allow float to open unit will go to harvest after 15-20 sec. delay (verifies float operation)
- Allow unit to go back into freeze and after 5 min. in freeze pull wire off K5 connector unit will now go through pump out after 15-20sec. delay
- Confirm unit cycles correctly (Remember to change S4 back to original settings)