



**BU  
ILT  
TO  
EN  
DU  
RE**

**EFFECTIVE: Jan 1, 2024**

# TABLE OF CONTENTS

## ICE MACHINES

<b>ICE MACHINE MODEL CODE &amp; USAGE GUIDE</b>	<b>5</b>
<b>TYPES OF ICE</b>	<b>6</b>
<b>CUBER SERIES</b>	<b>8</b>
Undercounter Cubers with Built-In Bins	10
KMEdgeX™ Crescent Cubers	14
KMEdge™ Crescent Cubers	16
KMEdge™ Crescent Cubers for Dispensers	17
KMEdge™ Low Profile Crescent Cubers	18
KMEdge™ Crescent Cubers - Serenity Series	19
IM Square Cubers {Specialty Ice}	21
<b>FLAKER / CUBELET SERIES</b>	<b>22</b>
Undercounter Flakers with Built-In Bins	22
Flakers	24
Undercounter Cubelet with Built-In Bins	26
Cubelet Ice Machines	27
Cubelets - Serenity Series	29
<b>DISPENSER SERIES</b>	<b>30</b>
DCM Ice & Water Dispensers	30
DB/DKM Hotel/Motel Dispensers	32
DM/DWM Dispensers	33
<b>ICE STORAGE BINS</b>	<b>34</b>
<b>DISPENSER STANDS</b>	<b>36</b>
<b>TOP KIT MATRIX</b>	<b>37</b>
<b>REMOTE CONDENSERS &amp; MATRIX</b>	<b>38</b>
<b>WATER FILTRATION</b>	<b>40</b>
<b>OZONE DEVICE &amp; REMOTE MONITORING</b>	<b>41</b>
<b>ICE ACCESSORIES</b>	<b>90</b>

# REFRIGERATION

<b>STEELHEART® FEATURES &amp; BENEFITS</b>	<b>42</b>
<b>REFRIGERATION MODEL CODE</b>	<b>45</b>
<b>STEELHEART® SERIES</b>	<b>46</b>
Upright Refrigerators & Freezers	<b>46</b>
Dual Temps	<b>49</b>
Pass-Thrus	<b>50</b>
Roll-Ins	<b>52</b>
Roll-Thrus	<b>53</b>
Heated Cabinets	<b>54</b>
Compact Undercounter Refrigerator	<b>56</b>
Undercounter Refrigerators & Freezers	<b>57</b>
Undercounter Refrigerators & Freezers with Drawers	<b>60</b>
Worktop Refrigerators & Freezers	<b>62</b>
Worktop Refrigerators & Freezers with Drawers	<b>64</b>
Drawer / Door Combination Refrigerators	<b>66</b>
Prep Tables - Sandwich Top Refrigerators	<b>68</b>
Prep Tables - Sandwich Top Refrigerators with Drawers	<b>69</b>
Prep Tables - Mega Top Refrigerators	<b>70</b>
Prep Tables - Mega Top Refrigerators with Drawers	<b>72</b>
Prep Tables - Pizza Refrigerators	<b>74</b>
Prep Tables - Pizza Refrigerators with Drawers	<b>75</b>
Prep Tables - Pizza Refrigerators Drawer / Door Combos	<b>76</b>
Refrigerated Equipment Stands	<b>77</b>
<b>GLASS DOOR MERCHANDISERS</b>	<b>78</b>
<b>BACK BAR REFRIGERATION</b>	<b>80</b>
<b>SUSHI CASES</b>	<b>85</b>
<b>ECONOMY SERIES</b>	<b>86</b>
<b>REFRIGERATION ACCESSORIES</b>	<b>92</b>





# HOSHIZAKI



Peachtree City



## Hoshizaki story

**HOSHIZAKI AMERICA, INC.**, with corporate headquarters in Peachtree City, Georgia, and a second manufacturing facility in Griffin, Georgia, operates some of the most automated production facilities in the industry. Certified as Georgia Made, HOSHIZAKI is proud to inform domestic and international consumers that many of their products have received the certification confirming they are manufactured in the state of Georgia. Using state-of-the-art technology, every HOSHIZAKI unit is run-tested at each factory, and undergoes rigorous quality performance tests. HOSHIZAKI offers advanced training seminars at our headquarters and basic training programs across the country for both service representatives and customers.







## HOSHIZAKI. BEYOND STRONG.

It's the promise of reliability... and the peace of mind that comes with it.  
It's performing beyond expectations...with relentless durability and sustainability.  
It's knowing that we've already thought about your future and can endure at the next level.

## DID YOU KNOW?

- **HOSHIZAKI** is the world's largest manufacturer of commercial ice equipment, employing over 13,180 people.
- **HOSHIZAKI** is the world's largest manufacturer of commercial refrigerated food service equipment with sales of over \$2.5 billion serving customers in 60 nations.
- **HOSHIZAKI** operates plants worldwide including two in the USA, three in Japan, one each in England and China.
- In expansion to a full-service kitchen equipment company, **HOSHIZAKI** acquired Lancer Corporation in 2006, GRAM Commercial A/S in 2008, and both Jackson and Macom in 2013.
- **HOSHIZAKI** is certified in ISO-9001 and ISO-14001 - being the first and only food service equipment manufacturer to achieve ISO-14001.
- **HOSHIZAKI** was awarded "Partner Of The Year - Sustained Excellence" by ENERGY STAR®.





# WARRANTY

**EFFECTIVE: January 1, 2024**

Supersedes all previous price lists

## TERMS and CONDITIONS

Prices are F.O.B. Factory. All prices and specifications are subject to change without notice. HOSHIZAKI reserves the right to determine point of shipment.

**TERMS:** Terms are such as the company may extend to the purchaser.

**LOST OR DAMAGED SHIPMENTS:** Whenever seller shall deliver or cause to be delivered to a common carrier any goods ordered by consignee, whether the particular common carrier shall have been designated in the shipping instructions of the consignee or not, seller shall not be responsible for any delays or damage in shipment and the common carrier to which seller shall deliver goods shipped to the consignee is hereby declared to the agent of the consignee. Therefore, it is the responsibility of the consignee to file claim with the carrier for lost or damaged shipments.

## WARRANTY

All units to be free from manufacturing defects, covered by:

**KMEdge™ Series Cubers, DKM Ice Machine & Dispenser and DB/DM Hotel/Motel Dispensers**

3-Year - Parts & Labor on entire machine & DB/DM Dispenser

5-Year - Parts & Labor on Evaporator, Parts on Compressor, Air-Cooled Condenser Coil

**AM-50 Series Cubers & C-80 Flakers**

2-Year - Parts & Labor on Entire Machine

**DWM MODwater® Water Dispensers**

3-Year - Parts & Labor on Entire Machine

**IM Series Cubers (Specialty Ice)**

3-Year - Parts & Labor on Entire Machine

5-Year - Parts on Compressor and Air-Cooled Condenser Coil

**Flakers and Cubelet Ice Machines, DCM Ice & Water Dispensers**

3-Year - Parts & Labor on Entire Machine

5-Year - Parts on Compressor and Air-Cooled Condenser Coil

**Bins & Water Dispensers**

3-Year - Parts & Labor on Slope Front Bins

5-Year - Parts & Labor on Large Upright Bin Models

**Countertop Refrigerated Display Cases**

1-Year - Parts & Labor on Entire Machine

2-Year - Parts & Labor on Compressor, Evaporator, Air-Cooled Condenser

5-Year - Parts on Compressor, Air-Cooled Condenser

**Accessories**

90 Day - Parts only

1-Year - HS-5061 Drain Pump (Beckett Brand) - Parts & Labor

1-Year - Water Filter System & Replaceable Elements

**Warranty**

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories only. Contact factory for warranty in other countries. Refer to manufacturer's full warranty for complete details. Suggested list prices are intended only as a guide. This does not restrict the price seller may establish due to market conditions.


## AGENCY LISTINGS and MARKS



CANADIAN ENERGY  
PERFORMANCE VERIFIED  
RENDEMENT ENERGETIQUE  
VERIFIE



# ICE MACHINE MODEL NUMBER IDENTIFICATION CODE

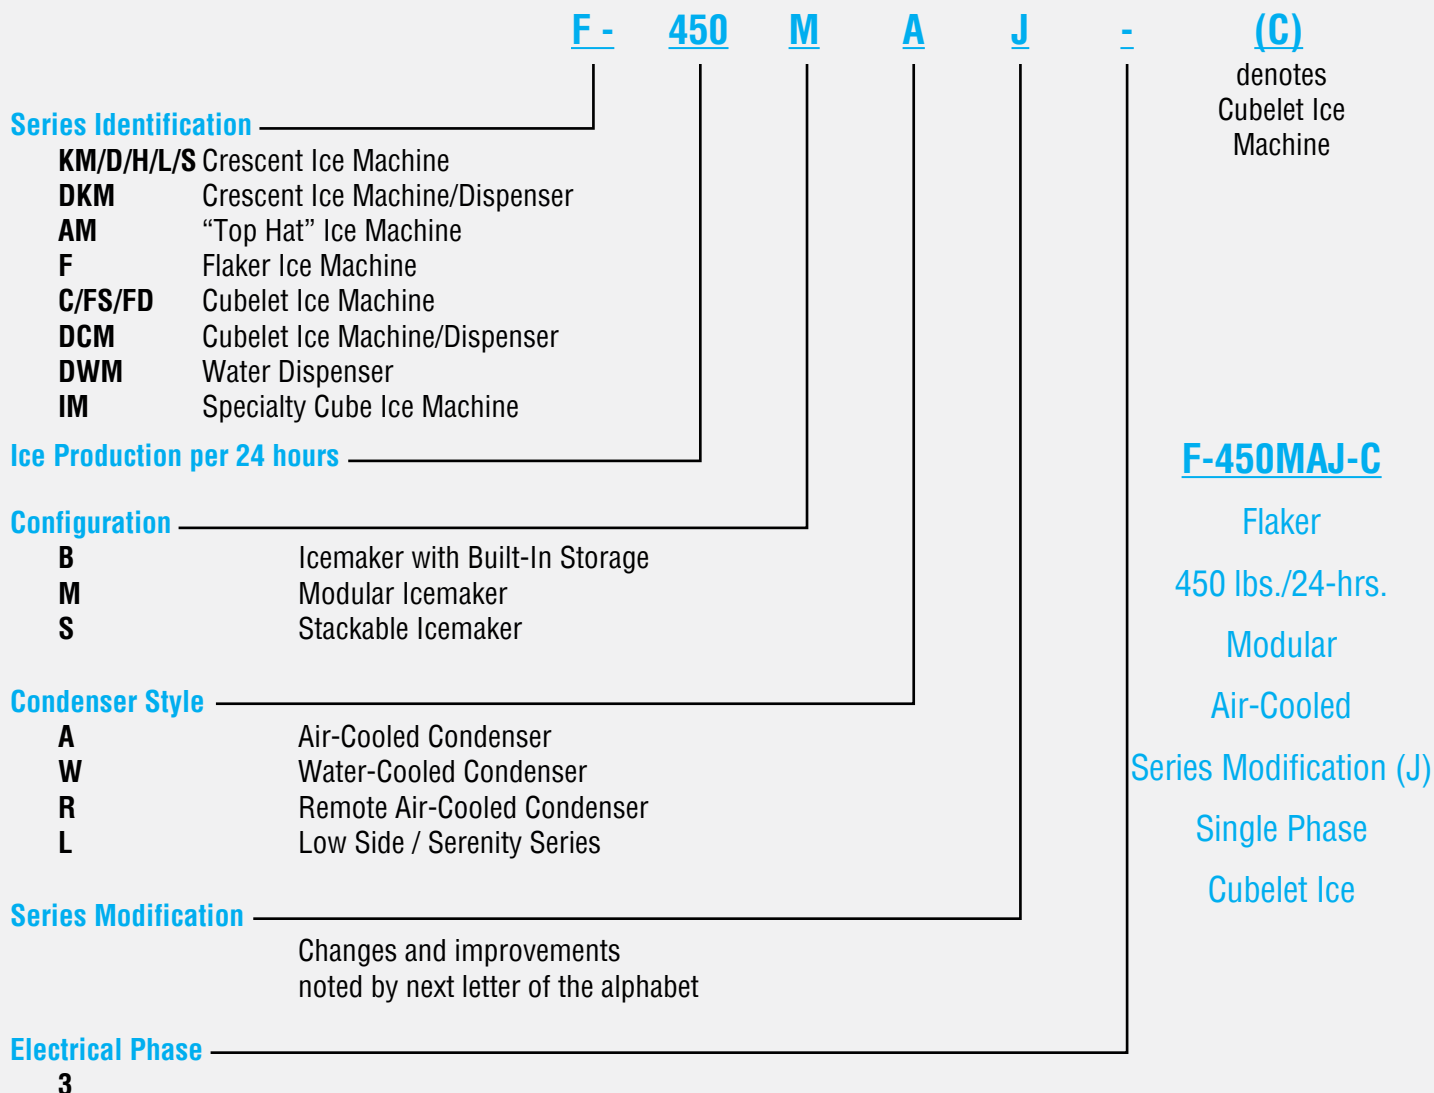

## CHOOSING THE RIGHT ICE MAKER



## HOW MUCH ICE DO YOU NEED?

Before choosing an ice maker, take a look at how many customers you serve and what type of ice you will need



**Restaurants**  
use an average  
of **2 lbs.** of ice per  
customer per day

**Schools and university  
cafeterias** average about  
**1.5 lbs.** of ice per  
student per day



**Hospital cafeterias**  
use about **1 lbs.** of ice  
per person per day and  
an average of **10 lbs.**  
for every bed

**Bars and cocktail  
lounges** use  
about **3 lbs.** of  
ice per seat



**Hotels** use  
about **5 lbs.** of ice  
per room per day

**Pounds of ice used**

**X** **Number of  
customers served**

**=** **The size of ice  
maker you need**


**Your menu should dictate your machine  
—not the other way around**

# 8 Types of Ice

with a variety of production & storage options

## KMEdge™

Individual, hard, clear crescent shape



## Cubelet

Chewable, small pellet shape



## Cubelet

SOFT - Chewable, small pellet shape



## Flaked


Soft, light, chewable moldable ice





 Restaurants


 University/School


 Hotels

 Business

 Bars & Cocktail Lounges

 Healthcare

 C-Store

 Grocery



# Specialty Ice

## Top Hat

Individual, hard, clear round shape



## 1by1 Cube

Individual, hard, clear square shape



## Sphere

Individual 1.8" in diameter, clear and solid




## 2by2 Cube

Individual, hard, clear square shape




# CUBER



CLEAN, CLEAR, CRESCENT CUBES

Clean, clear, individual crescent cubes. Longer-lasting equipment and the most efficient, money-saving ice maker ever.

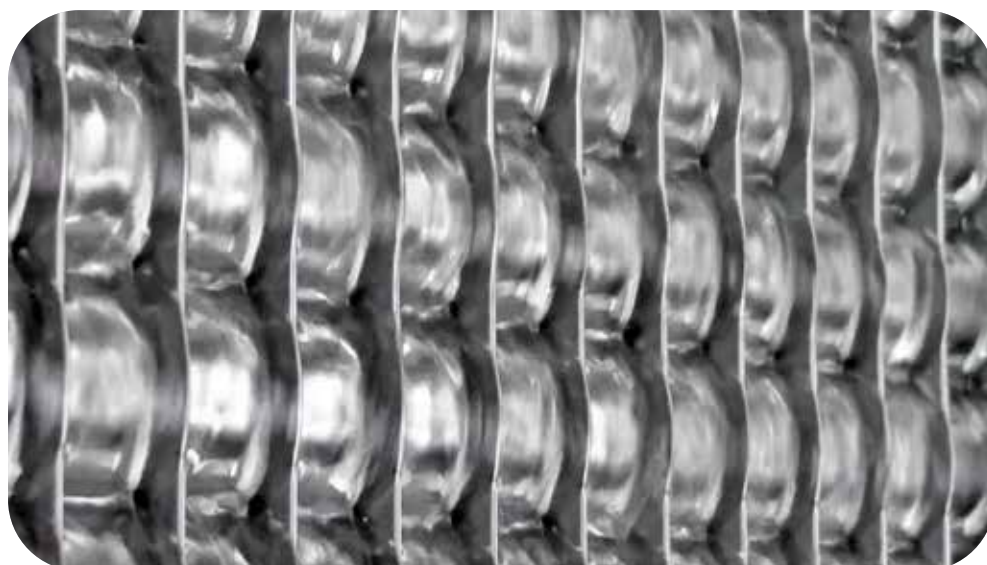

SCAN QR CODE  
TO WATCH VIDEO



## Energy Efficient

- Our CycleSaver design produces the same amount of ice in half the number of cycles
- Resulting in a longer total product life

## Dual-sided Evaporator

- Makes ice on both sides of the evaporator
- Reduces energy costs by creating the most efficient heat exchange

## Sanitary Components

- Removable air filters allow for easy and affordable maintenance
- Sealed compartments protect the evaporator, reducing bacteria growth and cleaning frequency

# CUBERS Modular



## KM-350M\_J

22"W X 27 3/8"D X 28"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
<b>KM-350MAJ*</b>	115V/60/1	393	489	5.4	175 Lbs.
<b>KM-350MWJ</b>	115V/60/1	383	414	4.9	175 Lbs.



Filter

Use URC-5FZ Condenser for Remote Air-Cooled Unit

## KM-520M\_J(Z)

22"W X 27 3/8"D X 28"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
<b>KM-520MAJ*</b>	115V/60/1	480	556	4.7	175 Lbs.
<b>KM-520MWJ</b>	115V/60/1	444	474	4.7	175 Lbs.
<b>KM-520MRJZ*</b>	115V/60/1	495	547	4.8	175 Lbs.



Filter

Use URC-5FZ Condenser for Remote Air-Cooled Unit

## KM-660M\_J(Z)

22"W X 27 3/8"D X 28"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
<b>KM-660MAJ</b>	115V/60/1	560	650	5.3	180 Lbs.
<b>KM-660MWJ</b>	115V/60/1	630	647	4.3	180 Lbs.
<b>KM-660MRJZ*</b>	115V/60/1	579	642	5.3	180 Lbs..



Filter

Use URC-5FZ Condenser for Remote Air-Cooled Unit

Model	Condenser	Kgs. of Ice per 24 hours 21°/10°C   32°/21°C		kWh per 45 kgs.	Shipping Weight
<b>KM-660MAJ-E</b>	220-240V/50/1	280	262	4.9	68 kgs.




Filter

Use URC-5FZ Condenser for Remote Air-Cooled Unit



B-300  
22 x 32 1/2 x 74



B-500  
30 x 32 1/2 x 74



B-700  
44 x 32 1/2 x 74



B-800  
48 x 32 1/2 x 74



B-900  
52 x 32 1/2 x 74

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

**See Top Kit Matrix on page 37 for additional bin options.**

*Bin graphic applies to all models on this page*





# CUBERS Undercounter



-DS shown with Custom Cabinetry

## AM Cubers with Built-In Bins



### AM-50BAJ

14 7/8"W X 22 5/8"D X 33 1/2"H

The ADA compliant machine dimensions are 14 7/8"W x 22 5/8"D x 31 1/2" H

Model	Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
AM-50BAJ	115V/60/1	35	51	17	112 Lbs.
AM-50BAJ-DS	115V/60/1	35	51	17	112 Lbs.
AM-50BAJ-AD	115V/60/1	34	55	16.8	112 Lbs.
AM-50BAJ-ADDS	115V/60/1	34	55	16.8	112 Lbs.




Filter

Self-Contained Bin Storage Capacity Up to 22 Lbs.



## Undercounter KM Cubers with Built-In Bins



### KM-81BAJ★

17 3/4"W X 24"D X 39"H (6" Legs Included)


	Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
 Filter	115V/60/1	52	78	8.5	125 Lbs.

Self-Contained Bin Storage Capacity Up to 38 Lbs.



### KM-116BAJ★

23 3/4"W X 24"D X 39"H (6" Legs Included)

	Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
 Filter	115V/60/1	100	125	8.1	146 Lbs.

Self-Contained Bin Storage Capacity Up to 53 Lbs.





# CUBERS Undercounter



## Undercounter KM Cubers with Built-In Bins

**KM-161B\_J**

23 3/4"W X 28"D X 39"H (6" Legs Included)

Model	Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
<b>KM-161BAJ</b>	115V/60/1	123	163	8.6	161 Lbs.
<b>KM-161BWJ</b>	115V/60/1	135	153	6.5	161 Lbs.




Filter

Self-Contained Bin Storage Capacity Up to 78 Lbs.

**KM-231BAJ**

24"W X 28"D X 39"H (6" Legs Included)

	Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
 Filter	115V/60/1	147	213	8.4	165 Lbs.

Self-Contained Bin Storage Capacity Up to 80 Lbs.



**KM-301B\_J**

30"W X 28"D X 39"H (6" Legs Included)

Model	Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
<b>KM-301BAJ</b>	115V/60/1	212	290	7.1	206 Lbs.
<b>KM-301BWJ</b>	115V/60/1	237	285	4.9	189 Lbs.



Filter

Self-Contained Bin Storage Capacity Up to 100 Lbs.





# CUBERS Modular



## KM-901M\_J(Z)(3)

30"W X 27 3/8"D X 32 1/2"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
KM-901MAJ	208-230V/60/1	753	905	5.0	260
KM-901MWJ	208-230V/60/1	870	950	3.6	250
KM-901MRJZ*	208-230V/60/1	780	900	4.8	255
KM-901MRJZ3*	208-230V/60/3	830	927	4.0	250



Filter

Use URC-14FZ Condenser for Remote Air-Cooled Unit  
See Top Kit Matrix on page 37 for additional bin options.

## KM-1100M\_J(Z)

30"W X 27 3/8"D X 32 1/2"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
KM-1100MAJ	208-230V/60/1	935	1087	4.9	290 Lbs.
KM-1100MWJ	208-230V/60/1	1006	1073	4.0	280 Lbs.
KM-1100MRJZ	208-230V/60/1	1030	1156	4.5	272 Lbs.

Model	Electrical	Kgs. of Ice per 24 hours 21°/10°C   32°/21°C		kWh per 45 kgs.	Shipping Weight
KM-1100MAJ50	220-240V/60/1	356	464	5.7	136 kg.




Filter

Use URC-14FZ Condenser for Remote Air-Cooled Unit




30 x 32 1/2 x 78 1/2



44 x 32 1/2 x 78 1/2



48 x 32 1/2 x 78 1/2



52 x 32 1/2 x 78 1/2

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.



# CUBERS Modular



## KM-1301S\_J(Z)(3)

48"W X 27 3/8"D X 27 3/8"H




Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
<b>KM-1301SAJ</b>	208-230V/60/1	1301	1365	4.3	338 Lbs.
<b>KM-1301SWJ</b>	208-230V/60/1	1230	1247	3.8	335 Lbs.
<b>KM-1301SRJZ</b>	208-230V/60/1	1260	1400	4.3	335 Lbs.
<b>KM-1301SAJ3*</b>	208-230V/60/3	1350	1427	4.3	335 Lbs.
<b>KM-1301SWJ3</b>	208-230V/60/3	1355	1360	3.9	338 Lbs.
<b>KM-1301SRJZ3*</b>	208-230V/60/3	1330	1433	3.8	335 Lbs.

Model	Electrical	Kgs. of Ice per 24 hours 32°A / 21°C   21°A / 10°C		kWh per 45 kgs.	Shipping Weight
<b>KM-1301SAJ-E</b>	220-240V/50/1	501	624	4.5	154 Kgs.



Filter

Use URC-14FZ Condenser for Remote Air-Cooled Unit

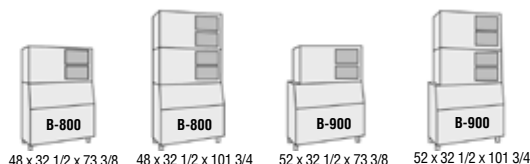

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.

## KM-1340M\_J(Z)(3)

30"W X 27 3/8"D X 41 1/2" H




Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
<b>KM-1340MAJ*</b>	208-230V/60/1	1089	1275	4.8	315 Lbs.
<b>KM-1340MWJ</b>	208-230V/60/1	1280	1323	3.6	315 Lbs.
<b>KM-1340MRJZ</b>	208-230V/60/1	1177	1371	4.5	289 Lbs.
<b>KM-1340MRJZ3*</b>	208-230V/60/3	1266	1428	4.1	289 Lbs.



Filter

Use URC-14FZ Condenser for Remote Air-Cooled Unit

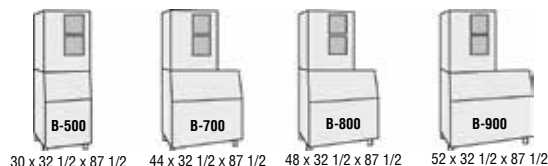

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.





# CUBERS Modular/Stackable



## KM-1601MRJZ(3)

30"W X 27 3/8"D X 41 5/8"H

Model	Electrical	Lbs. of Ice per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
KM-1601MRJZ	208-230V/60/1	1550	1594	4.4	316 Lbs.
KM-1601MRJZ3	208-230V/60/3	1550	1653	4.1	316 Lbs.




Filter

Use URC-22FZ Condenser for Remote Air-Cooled Unit



30 x 32 1/2 x 87 1/2



44 x 32 1/2 x 87 1/2



48 x 32 1/2 x 87 1/2



52 x 32 1/2 x 87 1/2

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.

## KM-1601S\_J(Z)(3)

48"W X 27 3/8"D X 27 3/8"H



Model	Electrical	Lbs. of Ice per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
KM-1601SAJ	208-230V/60/1	1433	1513	4.2	345 Lbs.
KM-1601SWJ	208-230V/60/1	1650	1660	3.3	335 Lbs.
KM-1601SRJZ*	208-230V/60/1	1600	1640	4.0	315 Lbs.
KM-1601SAJ3	208-230V/60/3	1414	1513	4.4	350 Lbs.
KM-1601SWJ3	208-230V/60/3	1660	1671	3.3	345 Lbs.
KM-1601SRJZ3	208-230V/60/3	1600	1635	4.1	355 Lbs.



Filter

Use URC-22FZ Condenser for Remote Air-Cooled Unit



48 x 32 1/2 x 73 3/8



48 x 32 1/2 x 101 3/4



52 x 32 1/2 x 73 3/8



52 x 32 1/2 x 101 3/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.





# CUBERS Stackable



## KM-1900S\_J(Z)(3)

48"W X 27 3/8"D X 36 7/16"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
KM-1900SAJ*	208-230V/60/1	1675	1875	3.9	415 Lbs.
KM-1900SWJ	208-230V/60/1	1875	1880	3.2	415 Lbs.
KM-1900SRJZ*	208-230V/60/1	1700	1933	3.9	415 Lbs.
KM-1900SAJ3*	208-230V/60/3	1675	1865	3.9	415 Lbs.
KM-1900SWJ3	208-230V/60/3	1875	1880	3.2	415 Lbs.
KM-1900SRJZ3*	208-230V/60/3	1700	1933	3.9	415 Lbs.



Use URC-22FZ Condenser for Remote Air-Cooled Unit



Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.




## KM-2200S\_J(Z)(3)

48"W X 27 3/8"D X 36 7/16"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
KM-2200SWJ3	208-230V/60/3	2200	2221	3.1	400 Lbs.
KM-2200SRJZ3*	208-230V/60/3	2075	2206	3.8	400 Lbs.



Use URC-22FZ Condenser for Remote Air-Cooled Unit

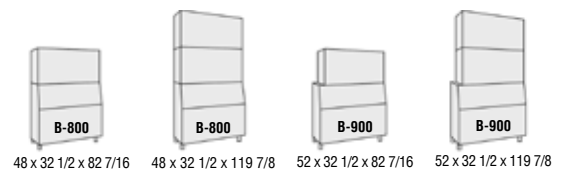

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.





# CUBERS Modular/Stackable



## KM-2600S\_JZ(3)

48"W X 27 3/8"D X 36 7/16"H

Model	Electrical	Lbs. of Ice per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
KM-2600SWJ3	208-230V/60/3	2480	2482	3.6	440 Lbs.
KM-2600SRJZ3*	208-230V/60/3	2580	2617	3.6	440 Lbs.



Filter

Use URC-26JZ Condenser for Remote Air-Cooled Unit



48 x 32 1/2 x 73 3/8    52 x 32 1/2 x 87 1/2

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.



## KMH-2100S\_J(Z)(3)

36"W X 40"D X 36 7/16"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
KMH-2100SWJ3	208-230V/60/3	2000	2060	2.9	415 Lbs.
KMH-2100SRJZ*	208-230V/60/1	1850	2034	3.8	415 Lbs.
KMH-2100SRJZ3*	208-230V/60/3	1925	2026	3.7	415 Lbs.



Filter

Use URC-22FZ Condenser for Remote Air-Cooled Unit

See Top Kit Matrix on page 37 for additional bin options.



## KMD-410M\_J

22"W X 24"D X 24"H

Model	Electrical	Lbs. of Ice per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
KMD-410MAJ	115V/60/1	351	418	5.7	161 Lbs.
KMD-410MWJ	115V/60/1	436	449	4.1	163 Lbs.



Filter



22 x 30 1/2 x 35 3/8    22 x 32 1/2 x 70 1/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.



# CUBERS Dispensers



## KMD-460M\_J

30"W X 24 1/4"D X 22 1/8"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
KMD-460MAJ	115V/60/1	400	440	5.5	170 Lbs.
KMD-460MWJ	115V/60/1	472	487	4.1	170 Lbs.



Filter



30 x 30 1/2 x 34

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.



## KMD-530M\_J(Z)

30"W X 24 1/4"D X 22 1/8"H

Model	Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
KMD-530MAJ	115V/60/1	442	501	5.7	170 Lbs.
KMD-530MWJ	115V/60/1	500	515	4.7	170 Lbs.
KMD-530MRJZ	115V/60/1	440	498	6.1	170 Lbs.



Filter

Use URC-5FZ Condenser for Remote Air-Cooled Unit



30 x 30 1/2 x 34

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.



## KMD-860M\_J(Z)

30"W X 24 5/8"D X 28"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
KMD-860MAJ	208-230V/60/1	665	855	5.2	248 Lbs.
KMD-860MWJ	208-230V/60/1	862	940	3.9	258 Lbs.
KMD-860MRJZ	208-230V/60/1	850	967	5.1	256 Lbs.



Filter


Use URC-9FZ Condenser for Remote Air-Cooled Unit



30 x 30 1/2 x 39 5/8



30 x 32 1/2 x 68 1/8



48 x 32 1/2 x 74

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.





# CUBERS Low-Profile



## KML-325M\_J

30"W X 27 3/8"D X 22"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
<b>KML-325MAJ</b>	115V/60/1	300	380	5.7	185 Lbs.
<b>KML-325MWJ</b>	115V/60/1	355	385	4.5	185 Lbs.



Filter

\*See bin diagram at bottom of the page.



## KML-500M\_J

30"W X 27 3/8"D X 22"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
<b>KML-500MAJ</b>	115V/60/1	400	442	5.6	185 Lbs.
<b>KML-500MWJ</b>	115V/60/1	515	543	4.3	185 Lbs.



Filter

\*See bin diagram at bottom of the page.



## KML-700M\_J(Z)


30"W X 27 3/8"D X 26"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
<b>KML-700MAJ*</b>	115V/60/1	610	662	4.9	204 Lbs.
<b>KML-700MWJ</b>	115V/60/1	660	665	3.8	202 Lbs.
<b>KML-700MRJZ*</b>	115V/60/1	614	657	4.9	200 Lbs.



Filter

Use URC-9Z Condenser for Remote Air-Cooled Unit

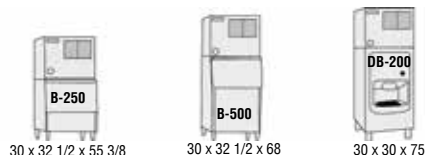

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

**See Top Kit Matrix on page 37 for additional bin options.**

\*Bin graphic applies to all models on this page







### KMS-822MLJ

22"W X 24 5/8"D X 28"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
<b>KMS-822MLJ</b> using 1 Phase Remote Condenser	115V/60/1 *	770	851	5.3	150 Lbs.



Filter

Use SRK-10J Condenser for Remote Air-Cooled Unit (sold separately)  
\*115V supply for the KMS Ice maker is supplied from the SRK remote condenser



### KMS-1122MLJ

22"W X 18 1/8"D X 31 1/4"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
<b>KMS-1122MLJ</b> using 1 Phase Remote Condenser	115V/60/1 *	1075	1151	4.2	152 Lbs.
<b>KMS-1122MLJ</b> using 3 Phase Remote Condense	115V/60/3 *	1100	1151	4.1	152 Lbs.



Filter

Use SRK-12J or SRK-12J3 Condenser for Remote Air-Cooled Unit (sold separately)  
\*115V supply for the KMS Ice maker is supplied from the SRK remote condenser



### KMS-1402MLJ

30"W X 24"D X 28"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
<b>KMS-1402MLJ</b> using 1 Phase Remote Condenser	115V/60/1 *	1400	1501	4.3	178 Lbs.
<b>KMS-1402MLJ</b> using 1 Phase Remote Condense	115V/60/3 *	1325	1474	4.6	178 Lbs.

Use SRK-12J or SRK-15/15J3 Condenser for Remote Air-Cooled Unit (sold separately)  
\*115V supply for the KMS Ice maker is supplied from the SRK remote condenser

### KMS-2000MLJ

30"W X 24"D X 32 7/8"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W   70°A / 50°W		kWh per 100 Lbs.	Shipping Weight
<b>KMS-2000MLJ</b> using 1 Phase Remote Condenser	208-230V/60/1 *	1850	1926	4.5	206 Lbs.
<b>KMS-2000MLJ</b> using 1 Phase Remote Condense	208-230V/60/3 *	1900	1938	4.3	206 Lbs.



Filter

Use SRK-20J or SRK-20J3 Condenser for Remote Air-Cooled Unit (sold separately)  
\*115V supply for the KMS Ice maker is supplied from the SRK remote condenser



# Creative Cocktails

## HOSHIZAKI SPECIALTY ICE



## Hoshizaki's exclusive line of Specialty Ice Machines

- Create upscale signature cocktails
- Increase revenue per cocktail
- Perfect amount of chilling with minimal dilution
- Perfect for preparation & presentation



# SPECIALTY ICE



## 1by1 Cube with Built-In Bin



**IM-200BAC**

39 1/2"W X 23 5/8"D X 33 1/2"H (6" Legs Included)



Filter

Electrical

115V/60/1

Lbs. per 24 hours  
90°A / 70°W | 70°A / 50°W

150 188

kWh per  
100 Lbs.

8.4

Shipping  
Weight

212 Lbs.

Self-Contained Bin Storage Capacity Up to 75 Lbs.



## 1by1 Cube Stackable Cuber

**IM-500SAB**

44" W x 27-5/8" D x 21-3/4" H



Filter

Electrical

115V/60/1

Lbs. per 24 hours  
90°A / 70°W | 70°A / 50°W

414 489

kWh per  
100 Lbs.

5.8

Shipping  
Weight

234 Lbs.



44 x 32 1/2 x 67 3/4 44 x 32 1/2 x 89 1/2 48 x 32 1/2 x 67 3/4 48 x 32 1/2 x 89 1/2 52 x 32 1/2 x 67 3/4 52 x 32 1/2 x 89 1/2 60 x 41 x 103 1/2

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.



## Sphere Ice Machine with Built-In Bin



**IM-50BAA-Q**

24 3/4" W X 20 3/4"D X 39 1/2"H (6" Legs Included)



Electrical

115V/60/1

Lbs. per 24 hours  
90°A / 70°W | 70°A / 50°W

45 50

kWh per  
100 Lbs.

15.7

Cubes produced  
in 24 hour period

~ 475

Shipping  
Weight

168 Lbs.



Filter

Self-Contained Bin Storage Capacity Up to 36 Lbs.



## 2by2 Cube with Built-In Bin



**IM-50BAA-LM**

19 3/4" W X 17 3/4"D X 39 1/2"H (6" Legs Included)



Electrical

115V/60/1

Lbs. per 24 hours  
90°A / 70°W | 70°A / 50°W

45 50

kWh per  
100 Lbs.

15.7

Cubes produced in  
24 hour period

~ 172

Shipping  
Weight

137 Lbs.




Filter

Self-Contained Bin Storage Capacity Up to 22 Lbs.





# Flaker



SOFT, LIGHT, CHEWABLE, VARIOUS SHAPES

Flaked ice is relatively dry and cools more quickly than other forms of ice. A 2-second flush of the evaporator occurs every hour to reduce impurity and mineral build up, improving sanitation and reliability.



## Undercounter FLAKERS with Built-In Bin

### F-300BAJ

36"W X 24 1/4"D X 39 1/4"H  
(6" Legs Included)



Filter

Electrical

115V/60/1

Lbs. per 24 hours

90°A / 70°W | 70°A / 50°W

247 353

kWh per  
100 Lbs.

6.1

Shipping  
Weight

221 Lbs.

Self-Contained Bin Storage Capacity Up to 110 Lbs.

### F-500BAJ

38 1/8"W X 29 1/8"D X 42"H  
(6" Legs Included)



Filter

Electrical

115V/60/1

Lbs. per 24 hours

90°A / 70°W | 70°A / 50°W

420 536

kWh per  
100 Lbs.

5.1

Shipping  
Weight

270 Lbs.

Self-Contained Bin Storage Capacity Up to 170 Lbs.



### F-330BAJ

24"W X 26"D X 39"H  
(6" Legs Included)



Filter

Electrical

115V/60/1

Lbs. per 24 hours

90°A / 70°W | 70°A / 50°W

243 332


kWh per  
100 Lbs.

5.1

Shipping  
Weight

178 Lbs.

Self-Contained Bin Storage Capacity Up to 80 Lbs.



## F-450MAJ

22"W X 27 3/8"D X 22"H



Filter

Electrical

115V/60/1

Lbs. per 24 hours  
90°A / 70°W | 70°A / 50°W

395


492

kWh per  
100 Lbs.

4.9

Shipping  
Weight

170 Lbs.




30 x 32 1/2 x 55 3/8




22 x 32 1/2 x 68




30 x 32 1/2 x 68



44 x 32 1/2 x 68



48 x 32 1/2 x 68



52 x 32 1/2 x 68

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.



## F-801M\_J

22"W X 27 3/8"D X 26"H

Model

Electrical

Lbs. per 24 hours  
90°A / 70°W | 70°A / 50°W

kWh per  
100 Lbs.

Shipping  
Weight

F-801MAJ★

115V/60/1

566

751

4.5

205 Lbs.

F-801MWJ

115V/60/1

605


680

3.9

205 Lbs.



Filter




30 x 32 1/2 x 55 3/8




22 x 32 1/2 x 68



30 x 32 1/2 x 68



44 x 32 1/2 x 68



48 x 32 1/2 x 68



52 x 32 1/2 x 68

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.







# FLAKER



## F-1002M\_J(Z)

22"W X 27 3/8"D X 26"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
F-1002MAJ	115V/60/1	758	980	4.4	210 Lbs.
F-1002MWJ	115V/60/1	833	955	3.6	205 Lbs.
F-1002MRJZ	115V/60/1	722	907	4.5	210 Lbs.
F-1002MLJ	115V/60/1	797	1028	1.5	205 Lbs.



Use URC-5F Condenser for Remote Air-Cooled Unit



22 x 32 1/2 x 71 15/16 30 x 32 1/2 x 71 15/16 44 x 32 1/2 x 71 15/16 48 x 32 1/2 x 71 15/16 52 x 32 1/2 x 71 15/16

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.

## F-1501M\_J(Z)

30" W x 27-3/8" D x 34-5/8" H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
F-1501MAJ	208-230V/60/1	1154	1543	4.0	325 Lbs.
F-1501MWJ	208-230V/60/1	1410	1624	3.2	350 Lbs.
F-1501MRJZ	208-230V/60/1	1181	1532	4.0	325 Lbs.



## F-2001M\_J(Z)(3)

30"W X 27 1/2"D X 34 5/8"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
F-2001MWJ	208-230V/60/1	1840	2043	3.2	342 Lbs.
F-2001MRJZ	208-230V/60/1	1660	2073	3.8	360 Lbs.
F-2001MRJZ3	208-230V/60/3	1675	2098	3.9	360 Lbs.
F-2001MLJ	115V/60/1	1733	2280	0.6	250 Lbs.



30 x 32 1/2 x 79 1/4 44 x 32 1/2 x 79 1/4 48 x 32 1/2 x 79 1/4 52 x 32 1/2 x 79 1/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.





# CUBELET


CHEWABLE, SOFT, SMALL NUGGET-SHAPED

**Cubelet ice** is hard enough to dispense - yet soft enough to soak up drink flavors for long-lasting enjoyment. Thanks to its quick chill time and fan favoritism, cubelet ice is ideal for a multitude of markets such as restaurants, convenience stores, offices, and healthcare.




## Cubelet

- Chewable, soft, small pellet shape
- Available in 3 sizes

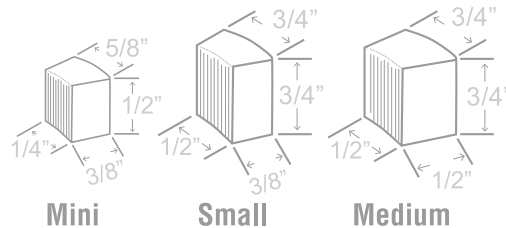

## Soft Cubelet

- Smaller, softer nugget-style ice
- Scoop from bin only  
(not intended for dispenser)

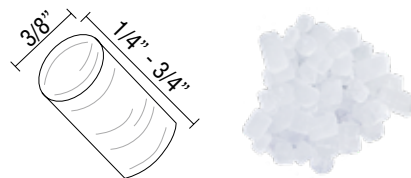



# CUBELET Self-Contained

## Undercounter Cubelets with Built-In Bin



-DS shown with  
Custom Cabinetry



### C-80BAJ Mini Cubelet

14 7/8"W X 22 5/8"D X 33 1/2"H

The ADA compliant machine dimensions are 14 7/8"W x 22 5/8"D x 31 1/2"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
C-80BAJ	115V/60/1	45	80	17.3	135 Lbs.
C-80BAJ-DS	115V/60/1	45	80	17.3	135 Lbs.
C-80BAJ-AD	115V/60/1	45	80	17.3	135 Lbs.
C-80BAJ-ADDS	115V/60/1	45	80	17.3	135 Lbs.

Self-Contained Bin Storage Capacity Up to 22 Lbs.

UL approved for outdoor use  
ADA compliant



### F-330BAJ-C Mini Cubelet

24"W X 26"D X 39"H (6" Legs Included)



Filter

Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
	90°A / 70°W	70°A / 50°W		
115V/60/1	214	288	7.3	178 Lbs.

Self-Contained Bin Storage Capacity Up to 80 Lbs.

Four 6" Legs Package (LP-6P LEG) included

### F-450MAJ-C Mini Cubelet


22"W X 27 3/8"D X 22"H



Filter

Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
	90°A / 70°W	70°A / 50°W		
115V/60/1	316	412	6.1	170 Lbs.

\*Not recommended for dispensing applications.

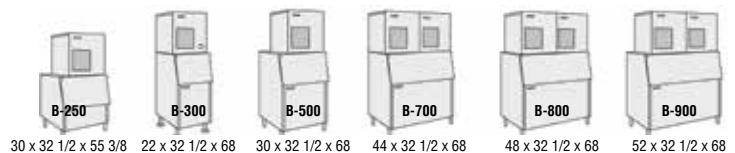

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.



†-DS Models - Wood Door System  
(Designed to accommodate custom cabinetry)



# CUBELET Self-Contained



## F-801M\_J-C Small Cubelet


22"W X 27 3/8"D X 26"H



Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
F-801MAJ-C★	115V/60/1	532	690	5.00	205 Lbs.
F-801MWJ-C	115V/60/1	580	632	4.13	205 Lbs.



Filter



30 x 32 1/2 x 59 3/8 22 x 32 1/2 x 72 30 x 32 1/2 x 72 44 x 32 1/2 x 72 48 x 32 1/2 x 72 52 x 32 1/2 x 72

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.


## F-1002M\_J(Z)-C Small Cubelet

22"W X 27 3/8"D X 26"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
F-1002MAJ-C	115V/60/1	726	890	4.57	210 Lbs.
F-1002MWJ-C	115V/60/1	878	770	3.8	205 Lbs.
F-1002MRJZ-C†	115V/60/1	680	821	4.94	210 Lbs.



Filter

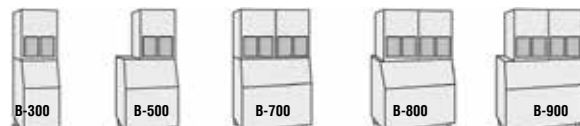

22 x 32 1/2 x 72 30 x 32 1/2 x 72 44 x 32 1/2 x 72 48 x 32 1/2 x 72 52 x 32 1/2 x 72

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.

Use URC-5FZ Condenser for Remote Air-Cooled Unit



## F-1501M\_J(Z)-C Medium Cubelet

30"W X 27 3/8"D X 34 7/16"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
F-1501MAJ-C	208-230V/60/1	1020	1327	4.61	325 Lbs.
F-1501MWJ-C	208-230V/60/1	1218	1376	3.76	330 Lbs.
F-1501MRJZ-C†	208-230V/60/1	1054	1353	4.50	325 Lbs.

Use URC-14FZ Condenser for Remote Air-Cooled Unit

## F-2001MRJZ-C Medium Cubelet


30"W X 27 1/2"D X 34 7/16"H



Filter

Condenser	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
	90°A / 70°W	70°A / 50°W		
208-230V/60/1	1500	1832	4.35	345 Lbs.

Use URC-22FZ Condenser for Remote Air-Cooled Unit



30 x 32 1/2 x 79 1/4 44 x 32 1/2 x 79 1/4 48 x 32 1/2 x 79 1/4 52 x 32 1/2 x 79 1/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 37) for top kit options based on bin size.

See Top Kit Matrix on page 37 for additional bin options.





# CUBELET



## FD-650M\_J(Z)-C Small Cubelet

22"W X 24"D X 26"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
FD-650MAJ-C	115V/60/1	495	634	5.5	185 Lbs.
FD-650MWJ-C	115V/60/1	520	622	4.0	185 Lbs.
FD-650MRJZ-C★	115V/60/1	470	588	5.0	185 Lbs.



Filter

Use URC-5FZ Condenser for Remote Air-Cooled Unit  
See Top Kit Matrix on page 37 for additional bin options.

## FD-1002M\_J(Z)-C Small Cubelet

22"W X 24"D X 26"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
FD-1002MAJ-C	115V/60/1	726	890	4.6	210 Lbs.
FD-1002MRJZ-C	115V/60/1	680	821	4.9	210 Lbs..



Filter

Use URC-5FZ Condenser for Remote Air-Cooled Unit  
See Top Kit Matrix on page 37 for additional bin options.





# CUBELET

## SERENITY SERIES




### FS-1001MLJ-C Small Cubelet

30"W X 11"D X 26"H

Filter	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
	115V/60/1	720	851	5.1	166 Lbs.

Designed for use on beverage dispensers.  
Use SRC-10J Condenser for Remote Air-Cooled Unit




### FS-1022MLJ-C Small Cubelet

22"W X 16 1/2"D X 26"H

Filter	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
	115V/60/1	730	889	5.1	150 Lbs.

Designed for use on beverage dispensers.  
Use SRC-10J Condenser for Remote Air-Cooled Unit




### FS-1501MLJ-C Medium Cubelet

30"W X 16 1/2"D X 34 1/4"H

Filter	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
	115V/60/1	1125	1386	4.75	229 Lbs.

Designed for use on beverage dispensers.  
Use SRC-14J Condenser for Remote Air-Cooled Unit





# DISPENSERS Ice & Water

## Cubelet



### DCM-271BAH Mini Cubelet

16 5/8" W X 24 1/4"D X 31 3/4"H (4" Legs Included)

Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
	90°A / 70°W	70°A / 50°W		
115V/60/1	196	257	6.9	154 Lbs.

Self-Contained Bin Storage Capacity Up to 10 Lbs.

NOTE: DCM-271BAH is made to pair with SD-271 stand. Placing a DCM-271BAH on SD-270 stand will require a new drain hole to be cut.



On a counter without legs  
or on a stand



**Floor Model  
with Optional Stand**  
16 9/16 x 24 1/8 x 66 7/8  
W x D x H



**Counter-Top  
with 4" Legs**  
16 9/16 x 24 1/8 x 31 11/16  
W x D x H



### DCM-300BAH Mini Cubelet

26"W X 22 1/2"D X 40"H (Unit supplied without legs)

Condenser	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
	90°A / 70°W	70°A / 50°W		
115V/60/1	232	321	6.8	220 Lbs.

Self-Contained Bin Storage Capacity Up to 40 Lbs.

### DCM-500B\_H Small Cubelet

26"W X 22 1/2"D X 40"H (Unit supplied without legs)

Model	Condenser	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
DCM-500BAH	115V/60/1	450	618	5.6	255 Lbs.
DCM-500BWH	115V/60/1	512	590	4.5	255 Lbs.

Self-Contained Bin Storage Capacity Up to 40 Lbs.



### DCM-75\_B\_H Small Cubelet

34 1/16"W X 28 1/2"D X 48 1/16"H  
(Unit supplied without legs)

Model	Condenser	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
DCM-752BAH	115V/60/1	576	708	5.1	345 Lbs.
DCM-751BWH	115V/60/1	678	782	4.8	345 Lbs.

Self-Contained Bin Storage Capacity Up to 95 Lbs.



**Counter-Top**  
26 x 22 1/2 x 40  
W x D x H



**Counter-Top  
with Optional 6" Legs**  
26 x 22 1/2 x 46  
W x D x H



**Floor Model  
with Optional Stand**  
26 x 22 1/2 x 72 1/2  
W x D x H

FOR: DCM 300BAH/500B\_H/75\_B\_H



# DISPENSERS Ice & Water



## Cubelet TOUCHLESS ICE & WATER

Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.

### DCM-271BAH-OS Mini Cubelet

16 5/8" W X 24 1/4" D X 31 3/4" H (4" Legs Included)

Condenser	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
	90°A / 70°W	70°A / 50°W		
115V/60/1	196	257	6.9	154 Lbs.

NOTE: DCM-271BAH is made to pair with SD-271 stand. Placing a DCM-271BAH on SD-270 stand will require a new drain hole to be cut.



On a counter without legs  
or on a stand

Self-Contained Bin Storage Capacity Up to 10 Lbs.



Floor Model  
with Optional Stand  
16 5/8 x 24 1/4 x 66 7/8  
W x D x H



Counter-Top  
with 4" Legs  
16 5/8 x 24 1/4 x 31 3/4  
W x D x H



### DCM-300BAH-OS Mini Cubelet

26"W X 22 1/2"D X 40"H (Unit supplied without legs)

Condenser	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
	90°A / 70°W	70°A / 50°W		
115V/60/1	232	321	6.8	240 Lbs.

Self-Contained Bin Storage Capacity Up to 40 Lbs.

### DCM-500B\_H-OS Small Cubelet

26"W X 22 1/2"D X 40"H (Unit supplied without legs)

Model	Condenser	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
DCM-500BAH-OS	115V/60/1	450	618	5.6	276 Lbs.
DCM-500BWH-OS	115V/60/1	512	590	4.5	269 Lbs.

Self-Contained Bin Storage Capacity Up to 40 Lbs.



### DCM-75\_B\_H-OS Small Cubelet

34 1/16"W X 28 1/2"D X 48 1/16"H  
(Unit supplied without legs)

Model	Condenser	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight
		90°A / 70°W	70°A / 50°W		
DCM-752BAH-OS	115V/60/1	576	708	5.1	345 Lbs.
DCM-751BWH-OS	115V/60/1	678	782	4.8	345 Lbs.

Self-Contained Bin Storage Capacity Up to 95 Lbs.

Units supplied without legs

FOR: DCM 300BAH/500B\_H/75\_B\_H



Counter-Top  
26 x 22 1/2 x 40  
W x D x H



Counter-Top  
with Optional 6" Legs  
26 x 22 1/2 x 46  
W x D x H



Floor Model  
with Optional Stand  
26 x 22 1/2 x 72 1/2  
W x D x H





# DISPENSERS Ice



## KMEdge™ DB Dispensers

### DB-130H

22"W X 30"D X 53"H (6" Legs Included)

Electrical	Application Ice Storage Capacity	Dispensing Rate	Icemaker kWh per 100 lbs.	Shipping Weight
115V/60/1	130 Lbs.	20 lbs. / min.	N/A	220 Lbs.



22 x 30 x 53  
W x D x H



**KM-350/520/660M**  
Cuber sold separately  
22 x 30 x 81  
W x D x H



### DB-200H

30"W X 30"D X 53"H (6" Legs Included)

Electrical	Application Ice Storage Capacity	Dispensing Rate	Icemaker kWh per 100 lbs.	Shipping Weight
115V/60/1	200 Lbs.	13 lbs. / min.	N/A	220 Lbs.



30 x 30 x 53  
W x D x H



**KML-325/500**  
Cuber sold separately  
30 x 30 x 75  
W x D x H



**KML-700**  
Cuber sold separately  
30 x 30 x 79  
W x D x H



On a counter without legs  
or on a stand

## KMEdge™ DKM Dispensers

### DKM-500B\_J

30" W x 28" D x 77" H (6" Legs Included)

Model	Electrical	Lbs. per 24 hours 90°A / 70°W   70°A / 50°W		Icemaker kWh per 100 lbs.	Shipping Weight
<b>DKM-500BAJ</b> ★	115V/60/1	534	545	5.6	300 Lbs.
<b>DKM-500BWJ</b>	115V/60/1	500	540	4.8	310 Lbs.

Self-Contained Bin Storage Capacity Up to 140 Lbs.



Four Painted 6" Flange Legs included  
Note: 90 Day Warranty on accessory parts  
Ice dispensing area is ADA compliant  
Only dispenses crescent ice



On a counter without legs  
or on a stand



# DISPENSERS Ice



## KMEdge™ Ice & Water Dispenser




**DM-200B**

30"W X 28"D X 36 3/8"H


Electrical	Application Ice Storage Capacity	Dispensing Rate	Icemaker Production per 24 hrs.	Icemaker kWh per 100 lbs.	Shipping Weight
115V/60/1	200 Lbs.	7.5 lbs. / min.	N/A	N/A	210 Lbs.



Unit supplied without legs  
Only dispenses crescent ice



Counter-Top  
30 x 28 x 36 3/8  
W x D x H



Counter-Top  
with optional 4" legs  
30 x 28 x 40 3/8  
W x D x H



## Cubelet Ice & Water Dispenser



**DM-4420N**

22"W X 30 1/2"D X 40"H

Electrical	Application Ice Storage Capacity	Dispensing Rate	Icemaker Production per 24 hrs.	Icemaker kWh per 100 lbs.	Shipping Weight
115V/60/1	200 Lbs.	N/A	N/A	N/A	185 Lbs.



Canadian Energy  
Performance Verified  
Rendement Energetique Verified

## MODwater® Water Dispenser



**DWM-20A**

14 7/8"W x 21 3/8"D x 16 5/8"H



Electrical	Max Volume of Chilled Water (Chilled or Sparkling)	Max Flow Rate (Chilled)	Heat Rejection	Refrigerant Type/ Charge	Min. Circuit/ Max. Fuse Size	Max Amps	Shipping Weight
120V/60/1	6.8 gal/hour	0.9 gal/min	450W	R-134a/4.23 oz	15A	9A	90 Lbs.

Installation kit included  
CO<sub>2</sub> tank must be sourced from other vendor



### TYPES OF WATER DISPENSED

Chilled	Temp.	34°-36°F
Sparkling	Carbonation	3.7 Vol.
Alkaline	pH (avg.)	8.0-9.0
Hot	Factory set	185°F





# ICE STORAGE Bins

**HOSHIZAKI Ice Storage Bins** are available with stainless steel exterior for easy cleaning and long-lasting attractive appearance. Sturdy construction for side-by-side or stacked installations and non-corrosive bin liner provide safe, sanitary storage of cubed or flaked ice. Foamed-in-place polyurethane insulation in all bin walls and bottom provides dependable ice storage. H-GUARD Plus® Antimicrobial Agent adds extra protection to the ice scoop (included).

## B-250SF



Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight
Stainless Steel	250 Lbs.	30" x 32 1/3" x 33 3/8"	110 Lbs.

Four 6" Painted Legs included  
Refer to Top Kit Matrix for necessary configurations

## B-300SF BD-300SF\*\*



Model	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight
<b>B-300SF</b>	Stainless Steel	300 Lbs.	22" x 32 1/3" x 46"	125 Lbs.

Four 6" Painted Flanged Legs included  
Refer to Top Kit Matrix for necessary configurations

Model	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight
<b>BD-300SF</b>	Stainless Steel	300 Lbs.	22" x 32 1/3" x 46"	130 Lbs.

For use with **KMD-410M, KMS-822M, FD-650M-C, FD-1002M-C**  
\*\*BD Bins fit 24" to 24 1/2" deep Ice Machines without Top Kit extension

## B-500SF BD-500SF\*\*



Model	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight
<b>B-500SF</b>	Stainless Steel	500 Lbs.	30" x 32 1/2" x 46"	140 Lbs.

Four 6" Painted Legs included  
Refer to Top Kit Matrix for necessary configurations

Model	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight
<b>BD-500SF</b>	Stainless Steel	500 Lbs.	30" x 32 1/2" x 46"	140 Lbs.

For use with **KMD-460M, KMD-530M, KMD-860M**  
\*\*BD Bins fit 24" to 24 1/2" deep Ice Machines without Top Kit extension

Four 6" Painted Legs included



# ICE STORAGE Bins



## B-700SF

### Exterior Finish

Stainless Steel

### Application Ice Storage Capacity

700 Lbs.

### Dimensions W x D x H (Height includes 6" legs)

44" x 32 1/3 x 46"

### Shipping Weight

175 Lbs.

Four 6" Painted Legs included  
Refer to Top Kit Matrix for necessary configurations



## B-800SF

### Exterior Finish

Stainless Steel

### Application Ice Storage Capacity

800 Lbs.

### Dimensions W x D x H (Height includes 6" legs)

48" x 32 1/3 x 46"

### Shipping Weight

185 Lbs.

Four 6" Painted Legs included  
Refer to Top Kit Matrix for necessary configurations



## B-900SF

### Exterior Finish

Stainless Steel

### Application Ice Storage Capacity

900 Lbs.

### Dimensions W x D x H (Height includes 6" legs)

52" x 32 1/3 x 46"

### Shipping Weight

195 Lbs.

Four 6" Painted Legs included  
Refer to Top Kit Matrix for necessary configurations



## B-1150SS / B-1300SS

### Model

### Exterior Finish

### Application Ice Storage Capacity

### Dimensions W x D x H (Height includes 6" legs)

### Shipping Weight

**B-1150SS**

Stainless Steel

1148 Lbs.

48" x 41" x 60 3/16"

315 Lbs.

**B-1300SS**

Stainless Steel

1304 Lbs.

48" x 41" x 66 3/16"

330 Lbs.

Four 6" Stainless Steel Legs included, baffle design increases ice accessibility by 30%  
Universal top included - Check Top Kit Application Guide for detail



## B-1500SS / B-1650SS

### Model

### Exterior Finish

### Application Ice Storage Capacity

### Dimensions W x D x H (Height includes 6" legs)

### Shipping Weight

**B-1500SS**

Stainless Steel

1500 Lbs.

60" x 41" x 62 3/16"

360 Lbs.

**B-1650SS**

Stainless Steel

1605 Lbs.

60" x 41" x 66 3/16"

375 Lbs.

Four 6" Stainless Steel Legs included, baffle design increases ice accessibility by 30%  
Universal top included - Check Top Kit Application Guide for detail





# DISPENSER Stands/Baggers

## SD STANDS DM and DCM Series Dispensers

Model Number	Use with Ice Machine / Dispenser Model	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight
<b>SD-200</b>	DM-200B	30" x 28" x 32 <sup>13/16"</sup>	105 lbs.
<b>SD-271</b>	DCM-271 (-OS)	16 <sup>1/2"</sup> x 24" x 35 <sup>3/16"</sup>	85 lbs.
<b>SD-500</b>	DCM-300 (-OS) / DCM-500 (-OS)	25 <sup>7/8"</sup> x 22" x 32 <sup>3/4"</sup>	90 lbs.
<b>SD-750</b>	DCM-751 (-OS) / DCM-752 (-OS)	34" x 28" x 32 <sup>3/4"</sup>	110 lbs.

NOTE: DCM-271BAH is made to pair with SD-271 stand.  
Placing a DCM-271BAH on SD-270 stand will require a new drain hole to be cut.

SD-200	SD-271	SD-500	SD-750
			

- Heavy duty stands for floor model ice machines/dispensers
- Easy cleaning and maintenance
- Attractive stainless steel exterior
- Locking doors standard

HCD ICE BAGGING SYSTEM SERIES	Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H	Shipping Weight
	<b>HCD-500B</b>	Stainless Steel	647 Lbs.	30" x 36" x 71"	510 Lbs.
	<b>HCD-1000B</b>	Stainless Steel	1078 Lbs.	48" x 36" x 71"	590 Lbs.
48" heavy duty ice paddle included					

HCD-500B	HCD-1000B
	

# TOP KIT Matrix



	22" Width KM-350M KM-520M KM-660M F-450M F-801M F-1002M	22" Width KMD-410M† KMS-822M FD-650M-C† FD-1002M-C	30" Width KM-901M KM-1100M KM-1340M KM-1601M KML Series F-1501M F-2001	30" Width KMD-460M‡ KMD-530M‡ KMD-860M‡ KMS-1402M* KMS-2000M*	44" Width 2 KM-350M 2 KM-520M 2 KM-660M IM-500S 2 F-450M 2 F-801M 2 F-1002M	44" Width 2 KMD-410M 2 FD-650M-C 2 FD-1002M-C	48" Width KM-1301S KM-1400S KM-1601S KM-1900S KM-2200S KM-2600S	60" Width 2 KM-901M 2 KM-1100M 2 KM-1340M 2 KM-1601M 2 KML Series 2 F-1501/2001M 2 KMD Series**
22" Width B-300SF DB-130H	—	HS-2153 HS-5424 (KMD-410 on B-300 only)	N/A	N/A	N/A	N/A	N/A	N/A
BD-300SF†	N/A	—	N/A	N/A	N/A	N/A	N/A	N/A
30" Width B-250SF B-500SF	HS-2033	HS-2033 & HS-2129	—	HS-2129	N/A	N/A	N/A	N/A
BD-500SF†	N/A	N/A	N/A	— (Only fits KMD Units)	N/A	N/A	N/A	N/A
44" Width B-700SF	HS-2035	HS-2035 & HS-2130	HS-2034	HS-2130 & HS-2034	—	HS-2130 (KMD-410M does not apply.)	N/A	N/A
48" Width B-800SF	HS-2035 & HS-2032	HS-2035, HS-2032 & HS-2131	HS-2034 & HS-2032	HS-2131, HS-2034 & HS-2032	HS-2032	HS-2032 & HS-2131	—	N/A
48" Width B-1150SS B-1300SS	UNIVERSAL TOP KIT INCLUDED	N/A	UNIVERSAL TOP KIT INCLUDED	UNIVERSAL TOP KIT INCLUDED & HS-2147	IM & F UNITS ONLY (HS-5397 for IM-500)	N/A	UNIVERSAL TOP KIT INCLUDED	N/A
52" Width B-900SF	HS-2035 & HS-2033	HS-2035 & HS-2033/2132	HS-2035	HS-2132 & HS-2035	HS-2033	HS-2033 & HS-2132	HS-2032	N/A
60" Width B-1500SS B-1650SS	N/A	N/A	UNIVERSAL TOP KIT INCLUDED & HS-2111	N/A	UNIVERSAL TOP KIT INCLUDED (HS-5397 for IM-500)	N/A	UNIVERSAL TOP KIT INCLUDED	UNIVERSAL TOP KIT INCLUDED
30" Width DB-200H DM-200B	HS-2036 (Only fits KM Units)	N/A	— (Only fits KML Units)	N/A	N/A	N/A	N/A	N/A

— No top kit necessary | N/A Combination of ice maker and bin is not possible

\*Except KMD-410M (See 22" Wide), †BD Bins Fit 24" to 24 1/2" Deep Ice makers w/o Top Kit, ‡HS-5065 Req'd for Air Cooled KMD-460/530MAJ

## KMS<sup>§</sup>, KMD, or FD on Bin Need Top Kit Extension:

Model Number	For Use With
HS-2129	B-500 Bins
HS-2130	B-700 Bins
HS-2131	B-800 Bins
HS-2132	B-900 Bins
HS-2147	B-1150 & 1300 Bins
HS-2153	B-300 Bins
HS-5424	KMD on DB-130

§Except KMS-1122MLJ

36" Width - KMH-2100S - Fit Kloppenberg Bins Only (Sold Separately)





Model Number	Description
HS-2032	4" ABS Top Kit
HS-2033	8" ABS Top Kit
HS-2034	14" ABS Top Kit
HS-2035	22" ABS Top Kit
HS-2036	(2) 4" ABS Top Kit For 22" KM on DB—200H
HS-2111	11.3" x 26.2" Stainless Cover/Separator
HS-2148	30" x 3.1" Stainless Cover
HS-5065	Front Panel Filter Kit for KMD-460/530M
HS-5397	Bin Control Kit for IM-500 on B-1150/1300/1500/1650
HS-2160	Top Kit for KM901 on 1500/1650



# REMOTE Condenser

## AIR-COOLED REMOTE CONDENSERS - URC / SRC / SRK

An Ice Machine with a **Remote Air Condenser** provides quiet operation at the icemaker location, improves efficiency, and saves energy with cooler operation. Sturdy construction and weather-resistant cabinet finish provides long life operation. Remote condensers may be installed outdoors up to 55 feet from the icemaker. For installations exceeding 55 feet, contact a Factory Technical Service Representative at 800-233-1940.

URC-5FZ, URC-9FZ, URC-14FZ	SRK-10J, SRK-12J, SRK-12J3 SRK-15J, SRK-15J3, SRK-20J, SRK-20J3	SRC-10J SRC-14J	URC-22FZ URC-26JZ
			

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight
--------------	--------------	------------	--	-----------------

<b>URC-5FZ</b>	KM-520MRJZ, KMD-530MRJZ, KM-660MRJZ, FD-650MRJZ-C, FD-1002MRJZ-C, F-1002MRJZ-C	115V/60/1	21 <sup>13/16"</sup> x 14 <sup>1/16"</sup> x 32 <sup>13/16"</sup>	90 Lbs.
----------------	--	-----------	---	---------

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight
--------------	--------------	------------	--	-----------------

<b>URC-9FZ</b>	KML-700MRJZ, KMD-860MRJZ	115V/60/1	35 <sup>11/16"</sup> x 14 <sup>1/16"</sup> x 36 <sup>1/2"</sup>	90 Lbs.
----------------	--------------------------	-----------	---	---------

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight
--------------	--------------	------------	--	-----------------

<b>SRC-10J</b>	FS-1001MLJ-C, FS-1022MLJ-C	230V/60/1	35 <sup>3/4"</sup> x 23 <sup>1/2"</sup> x 37"	230 Lbs.
----------------	----------------------------	-----------	---	----------

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight
--------------	--------------	------------	--	-----------------

<b>SRC-10J</b>	KMS-822MLJ	230V/60/1**	38" x 29" x 37"	230 Lbs.
----------------	------------	-------------	-----------------	----------

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight
--------------	--------------	------------	--	-----------------

<b>SRK-12J</b>	KMS-1122MLJ	230V/60/1**	52 <sup>3/8"</sup> x 19 <sup>1/2"</sup> x 43"	275 Lbs.
<b>SRK-12J3</b>	KMS-1122MLJ	230V/60/3	52 <sup>3/8"</sup> x 19 <sup>1/2"</sup> x 43"	275 Lbs.

\*\*3 wire with neutral for 115V

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight
--------------	--------------	------------	--	-----------------

<b>SRC-14J</b>	FS-1501MLJ-C	230V/60/1**	37 <sup>3/4"</sup> x 26 <sup>5/8"</sup> x 37"	220 Lbs.
----------------	--------------	-------------	---	----------

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight
--------------	--------------	------------	--	-----------------

<b>SRK-15J</b>	KMS-1402MLJ	230V/60/1	52 <sup>3/8"</sup> x 19 <sup>1/2"</sup> x 43"	275 Lbs.
<b>SRK-15J3</b>	KMS-1402MLJ	230V/60/3	52 <sup>3/8"</sup> x 19 <sup>1/2"</sup> x 43"	275 Lbs.

\*\*3 wire with neutral for 115V



# REMOTE Condenser



\*\*3 wire with neutral for 115V

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight
<b>URC-14FZ</b>	KM-901MRJZ(3), KM-1100MRJZ, KM-1301SRJZ(3), KM-1340MRJZ(3), F-1501MRJZ(-C)	115V/60/1	35 <sup>11/16"</sup> x 14 <sup>1/16"</sup> x 36 <sup>1/2"</sup>	110 Lbs.

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight
<b>SRK-20J</b>	KMS-2000MLJ	230V/60/1	62" x 21" x 45"	345 Lbs.
<b>SRK-20J3</b>	KMS-2000MLJ	230V/60/3	62" x 21" x 45"	345 Lbs.

\*\*3 wire with neutral for 115V

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight
<b>URC-22FZ</b>	KM-1601MRJZ(3), KM-1601SRJZ(3), KM-1900SRJZ(3), KM-2200SRJZ(3), KMH-2100SRJZ3, F-2001MRJZ(3)(-C)	115V/60/1	46 <sup>3/8"</sup> x 14 <sup>1/16"</sup> x 40 <sup>1/2"</sup>	130 Lbs.
<b>URC-26JZ</b>	KM-2600SRJZ3	115V/60/1	46 <sup>3/8"</sup> x 14 <sup>1/16"</sup> x 40 <sup>1/2"</sup>	150 Lbs.

## REMOTE CONDENSER MATRIX

### Non-Precharged Line Sets - BRAZING REQUIRED

Remote Condenser	Ice Machines	Shipping Weight	25' Length	35' Length	55' Length
<b>URC-5FZ</b>	KM-520MRJZ, KM-660MRJZ, KMD-530MRJZ, FD-650MRJZ-C, F-1002MRJZ(-C), FD-1002MRJZ(-C)	90 Lbs.	HS-5587	HS-5588	N/A
<b>URC-9FZ</b>	KML-700MRJZ, KMD-860MRJZ	90 Lbs.	HS-5604	HS-5605	HS-5606
<b>URC-14FZ</b>	KM-901MRJZ(3), KM-1100MRJZ, KM-1301SRJZ(3), KM-1340MRJZ(3) F-1501MRJZ(-C)	100 Lbs.	HS-5604	HS-5605	HS-5606
<b>URC-22FZ</b>	KM-1601MRJZ(3), KM-1601SRJZ(3), KM-1900SRJZ(3) KM-2200SRJZ(3), KMH-2100SRJZ(3), F-2001MRJZ(3)(-C)	130 Lbs.	HS-5323	HS-5324	HS-5325
<b>URC-26JZ</b>	KM-2600SRJZ3	150 Lbs.	HS-5323	HS-5324	HS-5325

### Non-Precharged Line Sets - BRAZING REQUIRED

Remote Condenser	Ice Machines	Shipping Weight	25' Length	35' Length	55' Length
<b>SRC-10J</b>	FS-1001MLJ-C, FS-1022MLJ-C	230 Lbs.	HS-5299*	HS-5300*	HS-5301*
<b>SRK-10J</b>	KMS-822MLJ	230 Lbs.	HS-0250*	HS-0251*	HS-0252*
<b>SRK-12J</b> <b>SRK-12J3</b>	KMS-1122MLJ	275 Lbs.	HS-0250*	HS-0251*	HS-0252*
<b>SRC-14J</b>	FS-1501MLJ-C	220 Lbs.	HS-5323*	HS-5324*	HS-5325*
<b>SRK-15J</b> <b>SRK-15J3</b>	KMS-1402MLJ	275 Lbs.	HS-0250*	HS-0251*	HS-0252*
<b>SRK-20J</b> <b>SRK-20J3</b>	KMS-2000MLJ	345 Lbs.	HS-0243*	HS-0244*	HS-0245*

\*Line sets require refrigerant



# WATER Filtration

Model Number	Description	Undercounter KMs	KM Cubers	IM Cubers	Flakers / Cubelet	DCMs
<b>H9320-51</b> Use E-10 10" Prefilter	Single	AM-50, KM-81, 116, 161 KM-231, 301	KM-350, 520, 660 KML-325, 500, 700 KMD-410, 460, 530 DKM-500	IM-200,500 IM-50BAA-LM	All Models	All Models
<b>H9320-52</b> Use E-20 20" Prefilter	Twin	N/A	KM-901, 1100, KMD-860 KMS-822, 1122, 1402	IM-50BAA-Q	N/A	N/A
<b>H9320-53</b> Use E-20 20" Prefilter	Triple	N/A	KM-1301, 1340, 1601, 1900, 2200, 2600 KMH-2100 KMS-2000	N/A	N/A	N/A
<b>H9655-11</b>	Replacement Cartridge (1) One each					

Recommended water filter configurations based on average ice machine usage and regular filter replacement. If your operation has challenging water conditions or higher usage, then it may be necessary to use an additional filter or prefilter.

Water Filters	Description	Height of System (Manifold + Cartridge)
<b>H9320-51</b>	Single	18.4" H
<b>H9320-52</b>	Twin	19.11" H
<b>H9320-53</b>	Triple	19.15" H
<b>H9320-54</b>	4H-SI (medical) Single	18.1" H
<b>H9655-11</b>	Replacement Cartridge each	N/A
<b>H9655-06</b>	Replacement Cartridge (6 pk)	N/A
<b>H9655-08</b>	4H-SI (medical) Cartridge (1 pk)	18.1" H

Prefilters	Description	Height of System (Cartridge)
<b>9534-26</b>	E-20 Replacement Cartridges (6 pk)	20"
<b>9534-12</b>	E-10 Replacement Cartridges (12 pk)	10"
<b>9534-20</b>	E-20 Replacement Cartridges (20 pk)	20"
<b>9534-40</b>	E-10 Replacement Cartridges (40 pk)	10"
<b>9795-80</b>	E-10 Prefilter	10"
<b>9795-90</b>	E-20 Prefilter	20"



# EcO<sub>3</sub>Ice Ozone System



Model Number	Description Flow Rate (Gal. per min.)	Undercounter KMs	KM Cubers	IM Cubers	Flakers / Cubelet	DCMs
HS-5282	Low Flow (.34 GPM)	AM-51B, KM-81B, KM-161B, KM-116B	N/A	N/A	All Models	N/A
HS-5283	Standard Flow (1.3 GPM)	KM-231B, KM-301B	KM-350M, KML-325M, 500M, KMD-410M, DKM-500B	IM-200BAC IM-500SAB IM-50BAA-LM	N/A	N/A
HS-5284	Fast Flow (4.2 GPM)	N/A	KM - 520M, 660M, 901M, 1100M, 1301S, 1340M, 1601M, 1601S, 1900S, 2200S, 2600S KMD - 460M, 530M, 860M, 901M, KML-700M KMS - 822M, 830M, 1122M, 1402M, 2000M KMH-2100S	IM-50BAA-Q	N/A	N/A
HS-5285	Replacement Cartridge (1) One each					

Model Number	Description	Overall Dimensions Model W x D x H
HS-5282	Low Flow (.03-.34GPM)	3.8" x 3.6" x 8.0"
HS-5283	Standard Flow (.34-1.3 GPM)	3.8" x 3.6" x 8.0"
HS-5284	Fast Flow (1.3-4.2 GPM)	5.98" x 3.6" x 9.28"
HS-5285	Replacement Cartridge each	N/A



**HS-5282**  
EcO<sub>3</sub>Ice Low Flow  
Ozone System



**HS-5284**  
EcO<sub>3</sub>Ice Fast Flow  
Ozone System



**HS-5285**  
EcO<sub>3</sub>Ice Ozone  
System  
Replacement  
Cartridge

EcO<sub>3</sub>Ice™

**HS-5283**  
EcO<sub>3</sub>Ice Standard  
Flow Ozone System

## Remote Monitoring System

For use on Hoshizaki KM Cuber ice machines

Model Number	For use with	Shipping Length	Shipping Width	Shipping Height	Shipping Weight
HS-5562	KM Cuber ice machines Not for use with KMD-410	8"	8"	3"	1 lb.
HS-5602	Flaker, Cubelet and DCM Series ice machines**	12"	12"	4"	2 lb.



- Performance dashboard for status, historical data
- Alert notification by email or text
- Remotely diagnose machines
- Control functions: ON/OFF, Reset, Lock-down



DEVICES



SECURE CLOUD SERVER



CELLULAR CONNECTIVITY



SMART GATEWAY



# Refrigeration



**Hoshizaki Steelheart® Reach-Ins** are engineered to meet the tough demands of commercial kitchens, Steelheart® reach-ins offer rugged, stainless steel construction inside and out for the highest quality, durability, performance and sanitation. When space is tight, remember that Hoshizaki reach-ins, dual temps and pass-thrus can roll through standard doors for easy installation. **Hover over to see ENERGY STAR® and Georgia Made® qualified products.**





# WARRANTY

**EFFECTIVE: January 1, 2024**

Supersedes all previous price lists

## TERMS and CONDITIONS

Prices are F.O.B. Factory. All prices and specifications are subject to change without notice. HOSHIZAKI reserves the right to determine point of shipment.

### TERMS:

Terms are such as the Company may extend to the purchaser.

### LOST OR DAMAGED SHIPMENTS:

Whenever seller shall deliver or cause to be delivered to a common carrier any goods ordered by consignee, whether the particular common carrier shall have been designated in the shipping instructions of the consignee or not, seller shall not be responsible for any delays or damage in shipment. The common carrier to which seller shall deliver goods shipped to the consignee is hereby declared to the agent of the consignee. Therefore, it is the responsibility of the consignee to file claim with the carrier for lost or damaged shipments.

## WARRANTY

All units to be free from manufacturing defects, covered by:

### Steelheart® Series Refrigerators & Freezers

- 5-Year - Labor on entire machine
- 6-Year - Parts on entire machine
- 7-year - Parts on Compressor

### Compact Undercounter Refrigerators HR24 & HR15 & Back Bar Refrigerators & Glass Door Merchandisers

- 3-Year - Parts & Labor on entire machine
- 5-Year - Parts on Compressor

### Economy Refrigeration Series

- 2 Year - Parts and Labor on entire machine
- 5 Year - Parts on Compressor

### Warranty

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories only. Contact Factory for Warranty in other Countries. Refer to manufacturer's full warranty for complete details. Suggested List Prices are intended only as a guide. This does not restrict the price seller may establish due to market conditions.

## AGENCY LISTINGS and MARKS





# NUMBER Identification



## HORIZONTAL REFRIGERATION | MODEL NUMBER IDENTIFICATION CODE

S R 48 B - 18MD2

### Series Identification

<b>U</b>	Undercounter
<b>W</b>	Worktop
<b>S</b>	Sandwich Prep/Mega Top
<b>P</b>	Pizza Prep
<b>C</b>	Chef Base

### Model Identification

<b>R</b>	Refrigerator
<b>F</b>	Freezer

### Unit Width

**##** In Inches

### Series Modification

**B** Alphabetically increases per model revisions

### Options Configuration

- LP / -D** Low Profile / Drawers
- # / -D#** Number of 1/6 Sized Pan Capacity / Number of 1/6 Sized Pan Capacity with Number of Drawers in Sandwich Prep
- #M/ -#MD#** Number of 1/6 Sized Pan Capacity / Number of 1/6 Sized Pan Capacity with Number of Drawers in Mega Top
- 01** Unit with Cylinder Lock

**SR48B-18MD2**

Mega Top Prep Table,  
Refrigerator,  
48" Wide,  
Revision B\*,

(18) 1/6 Sized Pan Capacity in Rail,  
Door and 2 Drawers\*

\*The series modification letter can be generally ignored when talking about the unit, this letter is important if you are getting Tech Support or ordering service parts.



## UPRIGHT REFRIGERATION | MODEL NUMBER IDENTIFICATION CODE

R 1 A - FS - FS  
PT & RT ONLY

### Model Identification

<b>R</b>	Refrigerator
<b>F</b>	Freezer
<b>DT</b>	Dual Temp
<b>PT</b>	Pass Thru
<b>RN</b>	Roll In
<b>RT</b>	Roll Thru

### Number of Sections

**1 / 2 / 3** One, Two, or Three Sections

### Series Modification

**A** Alphabetically increases per model revisions

### Door Configuration

- FS / -HS** Full Height or Half Height Stainless Door
- FG / -HG** Full Height or Half Height Glass Door
- FSL / -HSL** Full Height or Half Height Stainless Door, Left-Hand Hinge

**R1A-FS**

Upright Refrigerator,  
One Section  
Revision A\*,

Full Stainless Door

\*The series modification letter can be generally ignored when talking about the unit, this letter is important if you are getting Tech Support or ordering service parts.





# UPRIGHT Refrigerators



R1A-FS(L)★

R1A-HS(L)★

R2A-FS

R2A-HS

R2A-FSN

R3A-FS

R3A-HS

- Energy efficient thermostatic expansion valve
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks even when full
- Stainless steel interior and exterior front, sides and top
- Unique ducted air distribution system, maintains uniform cabinet temperatures
- 4" Heavy duty stem casters standard

Model Number	R1A-FS (L) - Left-Hand hinge	R1A-HS (L) - Left-Hand hinge	R2A-FS	R2A-FSN	R2A-HS	R3A-FS	R3A-HS
Interior Storage Capacity (AHAM)	23.10 ft <sup>3</sup>	23.10 ft <sup>3</sup>	50.37 ft <sup>3</sup>	47.11 ft <sup>3</sup>	50.37 ft <sup>3</sup>	79.03 ft <sup>3</sup>	79.03 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 33.5" x 79.5"	27.5" x 33.5" x 79.5"	55" x 33.5" x 79.5"	52" x 33.5" x 79.5"	55" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"
Depth with Doors Open at 90°	59.25"	59.25"	59.25"	57.75"	59.25"	59.25"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	20.25"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6	6	9	9
Center Shelves (C)	N/A	N/A	3	3	3	6	6
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26" (C) 6" x 17.8"	19.75" x 26"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6 x 22.9"	21.25" x 26" (C) 6 x 22.9"
Crated Shipping Weight	345 lbs.	345 lbs.	562 lbs.	562	562 lbs.	811 lbs.	811 lbs.
Crated Shipping Dimensions (L x W x H)	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	86" x 37.5" x 81"	86" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	5	5	8	8	8	9.5	9.5
HACR Breaker (AMP)	15	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	1.25	1.25	3.47	2.85	3.47	4.39	4.39
Heat Rejection (BTU / hr)*	317	317	513	621	513	703	703
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290	R290

\*Based on 100°F ambient cycling at set point



# UPRIGHT Refrigerators



- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- Energy efficient thermostatic expansion valve/self contained refrigeration system
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures even when full
- 4" Heavy duty stem casters standard
- Center shelves for added storage capacity

Model Number	R1A-FG	R1A-HG	R2A-FG	R2A-HG	R3A-FG	R3A-HG
Interior Storage Capacity (AHAM)	23.10 ft <sup>3</sup>	23.10 ft <sup>3</sup>	50.37 ft <sup>3</sup>	50.37 ft <sup>3</sup>	79.03 ft <sup>3</sup>	79.03 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 34.5" x 79.5"	27.5" x 34.5" x 79.5"	55" x 34.5" x 79.5"	55" x 34.5" x 79.5"	82.5" x 34.5" x 79.5"	82.5" x 34.5" x 79.5"
Depth with Doors Open at 90°	57"	57"	57"	57"	57"	57"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6	9	9
Center Shelves (C)	N/A	N/A	3	3	6	6
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 22.9"	21.25" x 26" (C) 6" x 22.9"
Crated Shipping Weight	350 lbs.	350 lbs.	570 lbs.	570 lbs.	826 lbs.	826 lbs.
Crated Shipping Dimensions (L x W x H)	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	86" x 37.5" x 81"	86" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	5	5	8	8	9.5	9.5
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.47	2.47	5.05	5.05	6.5	6.5
Heat Rejection (BTU / hr)*	639	639	978	978	1255	1255
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290

\*Based on 100°F ambient cycling at set point





# UPRIGHT Freezers



F1A-FS(L) F1A-HS(L)

F2A-FS

F2A-FSN

F2A-HS

F3A-FS

F3A-HS

- Stainless steel interior and exterior front, sides and top
- Energy efficient thermostatic expansion valve
- 4" Heavy duty stem casters standard
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks
- Unique ducted air distribution system, maintains a uniform cabinet temperatures even when full

Model Number	F1A-FS (L) - Left-Hand hinge	F1A-HS (L) - Left-Hand hinge	F2A-FS	F2A-FSN	F2A-HS	F3A-FS	F3A-HS
Interior Storage Capacity (AHAM)	23.10 ft <sup>3</sup>	23.10 ft <sup>3</sup>	50.37 ft <sup>3</sup>	47.11 ft <sup>3</sup>	50.37 ft <sup>3</sup>	79.03 ft <sup>3</sup>	79.03 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 33.5" x 79.5"	27.5" x 33.5" x 79.5"	55" x 33.5" x 79.5"	52" x 33.5" x 79.5"	55" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"
Depth with Doors Open at 90°	59.25"	59.25"	59.25"	57.75"	59.25"	59.25"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	20.25"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6	6	9	9
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26" (C) 6" x 17.8"	19.75" x 26"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 22.9"	21.25" x 26" (C) 6" x 22.9"
Crated Shipping Weight	345 lbs.	345 lbs.	562 lbs.	562 lbs.	562 lbs.	830 lbs.	830 lbs.
Crated Shipping Dimensions (L x W x H)	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	86" x 37.5" x 81"	86" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	230V/60/1	230V/60/1
Amperage (AMP)	8.46	8.46	8.7	9.5	8.7	11	11
HACR Breaker (AMP)	15	15	15	15	15	20	20
Energy Consumption (kWh / day) ASHRAE	6.25	6.25	12.16	11.61	12.16	17.02	17.02
Heat Rejection (BTU / hr)*	1178	1178	1820	2184	1820	1643	1643
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	208 - 254	208 - 254
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F
Refrigerant	R290	R290	R290	R290	R290	R290	R290

\*Based on 100°F ambient cycling at set point



# UPRIGHT Freezers/Dual Temp



F1A-FG

F1A-HG

F2A-FG

F2A-HG

DT1A-HS

DT2A-FS

- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures
- Dual temperature cabinets for space efficiency
- 4" Heavy duty stem casters standard even when full

Model Number	F1A-FG	F1A-HG	F2A-FG	F2A-HG	DT1A-HS	DT2A-FS
Interior Storage Capacity (AHAM) - Refrigerator Freezer	23.10 ft³	23.10 ft³	50.37 ft³	50.37 ft³	10.19 ft³ 10.19 ft³	23.10 ft³ 23.10 ft³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 34.5" x 79.5"	27.5" x 34.5" x 79.5"	55" x 34.5" x 79.5"	55" x 34.5" x 79.5"	27.5" x 35" x 79.5"	55" x 33.5" x 79.5"
Depth with Doors Open at 90°	57"	57"	57"	57"	61.75"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each	27.75" each	59.25"
Adjustable Shelves	3	3	6	6	3	3
Center Shelves (C)	N/A	N/A	3	3	N/A	N/A
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	(L/R) 21.25" x 26" (C) 6" x 17.8"	(L/R) 21.25" x 26" (C) 6" x 17.8"	21.25" x 26"	21.25" x 26"
Crated Shipping Weight	365 lbs.	365 lbs.	602 lbs.	602 lbs.	415 lbs.	634 lbs.
Crated Shipping Dimensions (L x W x H)	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	8.5	8.5	9.1	9.1	5.5	14
HACR Breaker (AMP)	15	15	15	15	15	20
Energy Consumption (kWh / day) ASHRAE	7.73	7.73	16.3	16.3	4.49	8.59
Heat Rejection (BTU / hr)*	806	806	1694	1694	168   439	376   1401
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104-126
Ambient Temp. Range	45° - 80°F	45° - 100°F	45° - 80°F	45° - 100°F	45° - 100°F	45° to 100°F
Control Set Point Range - Refrigerator Freezer	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	33° to 52°F - 10° to 10°F	33° to 52°F - 10° to 10°F
Refrigerant	R290	R290	R290	R290	R290	R290

\*Based on 100°F ambient cycling at set point





# PASS-THRU Refrigerators



**PT1A-FS-FS★**  
(Shown with door open)



**PT1A-HS-HS★**



**PT2A-FS-FS**



**PT2A-HS-HS**

- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- All models come with energy efficient vertical LED lights

- Unique ducted air distribution system, maintains a uniform cabinet temperatures
- 4" Heavy duty stem casters standard, two with brakes

Model Number	PT1A-FS-FS	PT1A-HS-HS	PT2A-FS-FS	PT2A-HS-HS
Interior Storage Capacity (AHAM)	24.20 ft <sup>3</sup>	24.20 ft <sup>3</sup>	52.50 ft <sup>3</sup>	52.50 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 35.75" x 79.5"	27.5" x 35.75" x 79.5"	55" x 35.75" x 79.5"	55" x 35.75" x 79.5"
Depth with Doors Open at 90°	87.25"	87.25"	87.25"	87.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6
Center Shelves (C)	N/A	N/A	3	3
Shelf Dimensions (W x D)	21.25" x 30.75"	21.25" x 30.75"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 17.8"
Crated Shipping Weight	357 lbs	357 lbs	592 lbs	592 lbs
Crated Shipping Dimensions (L x W x H)	38.5" x 31.5" x 81"	38.5" x 31.5" x 81"	58" x 38.5" x 81"	58" x 38.5" x 81"
Voltage	115/60/1	115/60/1	115/60/1	115/60/1
Amperage (AMP)	5	5	8	8
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	1.31	1.31	3.24	3.24
Heat Rejection (BTU / hr)*	348	348	581	581
Voltage Range	104-126	104-126	104-126	104-126
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Control Set Point Range	31° to 52°F	31° to 52°F	31° to 52°F	31° to 52°F
Refrigerant	R290	R290	R290	R290

\*Based on 100°F ambient cycling at set point





# PASS-THRU Refrigerators



**PT1A-FG-FG**



**PT2A-FG-FG**

- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- All models come with energy efficient vertical LED lights

- Unique ducted air distribution system, maintains a uniform cabinet temperatures
- 4" Heavy duty stem casters standard, two with brakes

Model Number	PT1A-FG-FG	PT2A-FG-FG
Interior Storage Capacity (AHAM)	24.20 ft <sup>3</sup>	52.50 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27.5" x 37.75" x 79.5"	55" x 37.75" x 79.5"
Depth with Doors Open at 90°	82.5"	82.5"
Interior Door Opening Width	21.75"	21.75"
Interior Door Opening Height	59.25"	59.25"
Adjustable Shelves	3	6
Center Shelves (C)	N/A	3
Shelf Dimensions (W x D)	21.75" x 30.75"	21.25" x 26" (C) 6" x 17.8
Crated Shipping Weight	367 lbs.	681 lbs.
Crated Shipping Dimensions (L x W x H)	41.25" x 31.5" x 81"	58" x 41.25" x 81"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	5	8
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	2.68	6
Heat Rejection (BTU / hr)*	653	1429
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Control Set Point Range	31° to 52°F	31° to 52°F
Refrigerant	R290	R290

\*Based on 100°F ambient cycling at set point





# ROLL-IN Refrigerators



**RN1A-FS**



**RN2A-FS**

- Stainless steel interior and exterior front, sides and top
- Environmentally friendly R290 hydrocarbon refrigerant
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures

- Reinforced stainless steel ramp and floor accommodate Roll-In racks up to 72" tall (supplied by others)
- Made to order

Model Number	RN1A-FS	RN2A-FS
Interior Storage Capacity (AHAM)	38.13 ft <sup>3</sup>	78.35 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	35" x 38.9" x 87.5"	68" x 38.9" x 87.5"
Depth with Doors Open at 90°	65.25"	65.25"
Interior Door Opening Width	29.25"	29.25"
Interior Door Opening Height	72.75"	72.75"
Crated Shipping Weight	429 lbs	676 lbs
Crated Shipping Dimensions (L x W x H)	40.5" x 39" x 93.5"	72" x 40.5" x 93.75"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	6.4	8.2
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	3.186	5.06
Heat Rejection (BTU / hr)*	774	1376
Voltage Range	104-126	104-126
Ambient Temp. Range	45° to 100°	45° to 100°
Control Set Point Range	31° - 52°F	31° - 52°F
Refrigerant	R290	R290

\*Based on 100°F ambient cycling at set point



# ROLL-THRU Refrigerators



**RT1A-FS-FS**



**RT2A-FS-FS**

- Stainless steel interior and exterior front, sides and top
- Environmentally friendly R290 hydrocarbon refrigerant
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures

- Reinforced stainless steel ramp and floor accommodate Roll-In racks up to 72" tall (supplied by others)
- Made to order

Model Number	RT1A-FS-FS	RT2A-FS-FS
Interior Storage Capacity (AHAM)	38.13 ft <sup>3</sup>	78.35 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	35" x 45.5" x 87.5"	68" x 45.5" x 87.5"
Depth with Doors Open at 90°	98.5"	98.5"
Interior Door Opening Width	29.25"	29.25"
Interior Door Opening Height	72.75"	72.75"
Crated Shipping Weight	459 lbs	737 lbs
Crated Shipping Dimensions (L x W x H)	40.5 x 39" x 93.5"	72" x 40.5" x 93.75"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	6.4	8.2
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	3.186	5.06
Heat Rejection (BTU / hr)*	774	1376
Voltage Range	104-126	104-126
Ambient Temp. Range	45° to 100°	45° to 100°
Control Set Point Range	31° - 52°F	31° - 52°F
Refrigerant	R290	R290

\*Based on 100°F ambient cycling at set point





# UPRIGHT Heated Cabinets



**HC1A-FS** ★

(Shown with top and door open)



**HC1A-HS** ★



**HC2A-FS** ★



**HC2A-HS** ★

- Stainless steel interior with stainless exterior front, sides, and top
- Interior top-mounted heating element with fan to circulate heat through cabinet; heat shield foamed in next to heating element
- Additional storage fits 12 (36 for 2-section) sheet pans
- Maximum interior storage capacity with smallest external footprint
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- 4" Heavy duty stem casters standard, two with brakes

Model Number	HC1A-FS	HC1A-HS	HC2A-FS	HC2A-HS
Interior Storage Capacity (AHAM)	22.70 ft <sup>3</sup>	22.62 ft <sup>3</sup>	49.70 ft <sup>3</sup>	49.50 ft <sup>3</sup>
"Overall Dimensions (W x D x H including 4" casters)"	27.5" x 33.5" x 79.5"	27.5" x 33.5" x 79.5"	55" x 33.5" x 79.5"	55" x 33.5" x 79.5"
Depth with Doors Open at 90°	59.25"	27.75"	59.25"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6
Center Shelves (C)	N/A	N/A	3	3
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"
Crated Shipping Weight	340 lbs	340 lbs	578 lbs	578 lbs
Crated Shipping Dimensions (L x W x H)	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"
Voltage	115/60/1	115/60/1	208-230/60/1	208-230/60/1
Amperage (AMP)	10	10	9 (208v) /10 (230v)	9 (208v) /10 (230v)
HACR Breaker (AMP) (W) ASTM 2140-11	15	15	20	20
Energy Consumption (w) ASTM 2140-11	N/A	N/A	N/A	N/A
Voltage Range	104-126	104-126	208-254	208-254
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Control Set Point Range	140° to 180°F	140° to 180°F	140° to 180°F	140° to 180°F



# UPRIGHT Heated Pass-Thrus



**HC1A-FS-FS** ★  
(Shown with top and doors open)



**HC1A-HS-HS** ★



**HC2A-FS-FS** ★



**HC2A-HS-HS** ★

- Stainless steel interior with stainless exterior front, sides, and top
- Interior top-mounted heating element with fan to circulate heat through cabinet; heat shield foamed in next to heating element
- Additional storage fits 12 (36 for 2 section) sheet pans

- Maximum interior storage capacity with smallest external footprint
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- 4" Heavy duty stem casters standard, two with brakes

Model Number	HC1A-FS-FS	HC1A-HS-HS	HC2A-FS-FS	HC2A-HS-HS
Interior Storage Capacity (AHAM)	23.82 ft <sup>3</sup>	23.68 ft <sup>3</sup>	52.40 ft <sup>3</sup>	52.10 ft <sup>3</sup>
"Overall Dimensions (W x D x H including 4" casters)"	27.5" x 35.75" x 79.5"	27.5" x 35.75" x 79.5"	55" x 35.75" x 79.5"	55" x 35.75" x 79.5"
Depth with Doors Open at 90°	87.25"	87.25"	87.25"	87.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6
Center Shelves (C)	N/A	N/A	3	3
Shelf Dimensions (W x D)	21.25" x 30.75"	21.25" x 30.75"	21.25" x 30.75"	21.25" x 30.75"
Crated Shipping Weight	367 lbs	367 lbs	625 lbs	625 lbs
Crated Shipping Dimensions (L x W x H)	38.5" x 31.5" x 81"	38.5" x 31.5" x 81"	58" x 38.5" x 81"	58" x 38.5" x 81"
Voltage	115/60/1	115/60/1	208-230/60/1	208-230/60/1
Amperage (AMP)	10	10	9 (208v) /10 (230v)	9 (208v) /10 (230v)
HACR Breaker (AMP)	15	15	20	20
Energy Consumption (w) ASTM 2140-11	N/A	N/A	N/A	N/A
Voltage Range	104-126	104-126	208-254	208-254
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Control Set Point Range	140° to 180°F	140° to 180°F	140° to 180°F	140° to 180°F





# UNDERCOUNTER Compact

## Refrigerators



HR15A★




HR15A-G



HR24C★



HR24C-G

- Stainless steel interior and exterior
- UL approval for outdoor use
- ADA Compliant 

- Lockable stainless steel door is field reversible
- Ducted air flow for even air distribution throughout cabinet
- Interior LED lighting

Model Number	HR15A	HR15A-G	HR24C	HR24C-G
Interior Storage Capacity (AHAM)	2.54 ft <sup>3</sup>	2.54 ft <sup>3</sup>	3.87 ft <sup>3</sup>	3.87 ft <sup>3</sup>
Overall Dimensions (W x D x H including legs)	14.8" x 25.75" x 31.5"	14.8" x 25.75" x 31.5"	23.4" x 26.5" x 31.5"	23.4" x 26.5" x 31.5"
Depth with Doors Open at 90°	37.25"	37.25"	46.7"	46.7"
Adjustable Shelves	2	2	3	3
Shelves (#) / Dimensions(W x D)	(2) / 10" x 20" adjustable slide out shelf	(2) 10" x 20"	(1) / 18.5" x 17" (2) / 18.5" x 12"	(1) / 18.5" x 17" (2) / 18.5" x 12"
Crated Shipping Weight	115 lbs	115 lbs	115 lbs	115 lbs
Crated Shipping Dimensions (L x W x H)	30.6" x 18.75" x 37"	30.6" x 18.75" x 37"	26.8" x 24" x 36.6"	26.8" x 24" x 36.6"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	0.9	0.9	1.1	1.1
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.54	0.54	0.64	0.64
Heat Rejection (BTU / hr)*	145	145	648	648
Voltage Range	104 - 127	104-127	115 - 127	115 - 127
Ambient Temp. Range	45° - 90°F	45° - 90°F	45° - 100°F	45° - 100°F
Control Set Point Range	28° - 40°F	28° - 40°F	34° - 52°F	34° - 52°F
Refrigerant	R600a	R600a	R600a	R600a

\*Based on 100°F ambient cycling at set point





# UNDERCOUNTER Refrigerators



UR27B(-01)★

UR27B-LP★

UR36B(-01)★

UR48B(-01)★

UR60B(-01)★

UR72B(-01)★

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient

- Optional 2.25" casters for ADA Compliance



- Field reversible doors
- Electronic controls

Model Number	UR27B UR27B-01** (01 Cylinder Door Lock)	UR27B-LP Low Profile unit meets ADA requirements	UR36B UR36B-01** (01 Cylinder Door Lock)	UR48B UR48B-01** (01 Cylinder Door Lock)	UR60B UR60B-01** (01 Cylinder Door Lock)	UR72B UR72B-01** (01 Cylinder Door Lock)
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	6.21 ft <sup>3</sup>	8.64 ft <sup>3</sup>	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>	18.27 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	27" x 30" x 31.9"	36" x 30" x 33.75"	48" x 30" x 33.75"	60" x 30" x 33.75"	72" x 30" x 33.75"
Depth with Doors Open at 90°	55.5"	55.5"	58.5"	52.5"	58.5"	52.5"
Interior Door Opening Width	22.75"	22.75"	25.5"	19.5"	25.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"	23"	23"
Adjustable Shelves	1	1	1	2	2	3
Shelf Dimensions (W x D)	22" x 16"	22" x 16"	31" x 16"	21.5" x 16"	27.25" x 16"	22" x 16"
Crated Shipping Weight	173 lbs.	173 lbs.	204 lbs.	249 lbs.	290 lbs.	339 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	34" x 31.5" x 35.5"	40.5" x 34" x 36.5"	52.5" x 34" x 36.5"	62.5" x 34" x 36.5"	73.75" x 32" x 36.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.7	2.7	2.5	3	3	3
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	0.65	0.69	1.05	0.927	1.12
Heat Rejection (BTU / hr)*	193	193	184	278	249	360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290

\*Based on 100°F ambient cycling at set point

\*\*SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.





# UNDERCOUNTER Glass Door

## Refrigerators and Freezer



UR27B-GLP01



UR48B-GLP01 ★



UF27B-GLP01

- Stainless steel interior and exterior front, sides and top
- Energy efficient LED interior lights with on/off switch
- Standard 2.25" casters (2 with brakes)

- Meets ADA requirements



- Glass doors with locks are energy efficient multi pane, argon filled
- Field reversible glass doors

Model Number	UR27B-GLP01	UR48B-GLP01	UF27B-GLP01
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>	6.21 ft <sup>3</sup>
Overall Dimensions W x D x H including (2.25" casters)	27" x 31" x 32"	48" x 31" x 32"	27" x 31" x 32"
Depth with Doors Open at 90°	55.5"	52"	55.5"
Interior Door Opening Width	22.75"	19.5"	22.75"
Interior Door Opening Height	23"	23"	23"
Adjustable Shelves	1	2	1
Shelf Dimensions (W x D)	22" x 16"	21.5" x 16"	22" x 16"
Crated Shipping Weight	183 lbs.	249 lbs.	189 lbs.
Crated Shipping Dimensions (L x W x H)	36" x 31.5" x 35.5"	52.5" x 34" x 36.5"	36" x 31.5" x 35.5"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	3	3
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) ASHRAE	1.15	1.46	4.32
Heat Rejection (BTU / hr)	263	432	468
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 80°F
Temperature Range	32° - 52°F	32° - 52°F	-10° - 10°F
Refrigerant	R290	R290	R290



# UNDERCOUNTER Freezers



UF27B(-01)



UF27B-LP




UF48B(-01)



UF60B(-01)★

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient

- Optional 2.25" casters for ADA Compliance 
- Field reversible doors
- Enamel coated evaporator coil

Model Number	UF27B UF27B-01 ** (01 Cylinder Door Lock)	UF27B-LP Low Profile unit meets ADA requirements	UF48B UF48B-01 ** (01 Cylinder Door Lock)	UF60B UF60B-01 ** (01 Cylinder Door Lock)
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	27" x 30" x 32"	48" x 30" x 33.75"	60" x 30" x 33.75"
Depth with Doors Open at 90°	55.5"	55.5"	52.5"	58.5"
Interior Door Opening Width	22.75"	22.75"	19.5"	25.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	1	1	2	2
Shelf Dimensions (W x D)	22" x 16"	22" x 16"	21.5" x 16"	27.25" x 16"
Crated Shipping Weight	175 lbs.	175 lbs.	258 lbs.	310 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	34" x 31.5" x 35.5"	52.5" x 34" x 36.5"	62.5" x 34" x 36.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.4	2.4	3.6	4
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.4	2.4	3.6	3.95
Heat Rejection (BTU / hr)	489	509	756	727
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290	R290	R290

**\*\*SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.**





# UNDERCOUNTER Refrigerators

## Refrigerators with Drawers



UR27B-D2



UR48B-D4



UR60B-D4



UR72B-D6

- Stainless steel interior and exterior front, sides and top
- Heavy duty drawers with removeable gaskets
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- Optional 2.25" casters for ADA Compliance 
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Enamel coated evaporator coil

Model Number	UR27B-D2	UR48B-D4	UR60B-D4	UR72B-D6
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>	15.27 ft <sup>3</sup>	18 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	48" x 30" x 33.75"	60" x 30" x 33.75"	72" x 30" x 33.75"
Depth with Drawer Fully Open	52"	52"	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Crated Shipping Weight	203 lbs.	314 lbs.	346 lbs.	443 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	52.5" x 34" x 36.5"	62.5" x 34" x 36.5"	73.75" x 32" x 36.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	3	3	3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	1.05	1.75	1.12
Heat Rejection (BTU / hr)	152	278	249	360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290



# UNDERCOUNTER Freezers




## Freezers with Drawers



UF27B-D2



UF48B-D4

- Stainless steel interior and exterior front, sides and top
- Heavy duty drawers with removeable gaskets
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- 4" Stem casters standard
- Optional 2.25" casters for ADA Compliance 
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Electronic controls

Model Number	UF27B-D2	UF48B-D4
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	48" x 30" x 33.75"
Depth with Drawer Fully Open	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 size and (1) 1/3 size, 6" deep
Crated Shipping Weight	207 lbs.	331 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	52.5" x 34" x 36.5"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	3	4
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	2.4	3.60
Heat Rejection (BTU / hr)	489	756
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290





# WORKTOP Refrigerators



WR27B(-01)★



WR36B(-01)★



WR48B(-01)★



WR60B(-01)★



WR72B(-01)★

- Stainless steel interior and exterior front, sides and top
- Field reversible doors
- Cabinet and doors are insulated with 2" foamed in place polyurethane
- Enamel coated evaporator coil
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stem casters standard

Model Number	WR27B WR27B-01** (01 Cylinder Door Lock)	WR36B WR36B-01** (01 Cylinder Door Lock)	WR48B WR48B-01** (01 Cylinder Door Lock)	WR60B WR60B-01** (01 Cylinder Door Lock)	WR72B WR72B-01** (01 Cylinder Door Lock)
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	8.64 ft <sup>3</sup>	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>	18.27 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	36" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"	72" x 30" x 40"
Depth with Doors Open at 90°	55.5"	58.5"	52.5"	58.5"	52.5"
Interior Door Opening Width x Height	22.75" x 23"	25.5" x 23"	19.5" x 23"	25.5" x 23"	19.5" x 23"
Adjustable Shelves	1	1	2	2	3
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.5" x 16"	27.25" x 16"	22" x 16"
Crated Shipping Weight	183 lbs.	216 lbs.	264 lbs.	302 lbs.	350 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	40.5" x 34" x 40.5"	52.5" x 34" x 40.5"	62.5" x 34" x 40.5"	73.75" x 32" x 36.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.7	2.5	3	3	3
HACR Breaker (AMP)	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	0.69	1.05	0.927	1.12
Heat Rejection (BTU / hr)	193	184	278	249	360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290

\*\*SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.





# WORKTOP Freezers



WF27B(-01)



WF48B(-01)



WF60B(-01)★

- Stainless steel interior and exterior front, sides and top
- Field reversible doors
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Electronic controls
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stern casters standard

Model Number	WF27B WF27B-01** (01 Cylinder Door Lock)	WF48B WF48B-01** (01 Cylinder Door Lock)	WF60B WF60B-01** (01 Cylinder Door Lock)
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"
Depth with Doors Open at 90°	55.5"	52.5"	58.5"
Interior Door Opening Width	22.75"	19.5"	25.5"
Interior Door Opening Height	23"	23"	23"
Adjustable Shelves	1	2	2
Shelf Dimensions (W x D)	22" x 16"	21.38" x 16"	27.25" x 16"
Crated Shipping Weight	185 lbs.	273 lbs.	324 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	52.5" x 34" x 40.5"	62.5" x 34" x 40.5"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.4	3.6	4
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.4	3.6	3.95
Heat Rejection (BTU / hr)	489	756	727
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290	R290

**\*\*SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.**





# WORKTOP Refrigerators

## Refrigerators with Drawers



**WR27B-D2**



**WR48B-D4**



**WR60B-D4**



**WR72B-D6**

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Heavy duty drawers with removeable gaskets
- 6" Stem casters standard
- Electronic controls

Model Number	WR27B-D2	WR48B-D4	WR60B-D4	WR72B-D6
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>	18.27 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"	72" x 30" x 40"
Depth with Drawer Fully Open	52"	52"	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Crated Shipping Weight	214 lbs.	332 lbs.	381 lbs.	460 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	52.5" x 34" x 40.5"	62.5" x 34" x 40.5"	73.75" x 32" x 40.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	3	3	3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	1.05	1.75	1.12
Heat Rejection (BTU / hr)	152	278	249	360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290



# WORKTOP Freezers



## Freezers with Drawers



**WF27B-D2**



**WF48B-D4**

- Stainless steel interior and exterior front, sides and top
- Heavy duty drawers with removeable gaskets
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stem casters standard
- Electronic controls

Model Number	WF27B-D2	WF48B-D4
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	12 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	48" x 30" x 40"
Depth with Drawer Fully Open	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 Size and (1) 1/3 Size, 6" deep
Crated Shipping Weight	218 lbs.	346 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	52.5" x 34" x 40.5"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	3	4
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	2.4	3.60
Heat Rejection (BTU / hr)	489	756
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290





# DRAWER/DOOR Combination

## Refrigerators



UR48B-D2



UR60B-D2



WR48B-D2



WR60B-D2

- Stainless steel interior and exterior front sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Door/Drawer configuration can be located in any cabinet section
- Enamel coated evaporator coil
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Field reversible doors

Model Number	UR48B-D2	UR60B-D2	WR48B-D2	WR60B-D2
Interior Storage Capacity (AHAM)	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>	12 ft <sup>3</sup>	15.1 ft <sup>3</sup>
Overall Dimensions (L x W x H)	48" x 30" x 33.75" (including 4" casters)	60" x 30" x 33.75" (including 4" casters)	48" x 30" x 40" (including 6" casters)	60" x 30" x 40" (including 6" casters)
Depth With Door Open At 90°	52.5"	58.5"	52.5"	58.5"
Depth With Drawer Fully Open	52"	52"	52.5"	52"
Door Opening Width x Height	19.5" x 23"	25.5" x 23"	19.5" x 23"	25.5" x 23"
Shelves (#) / Dimensions(W x D)	(1) / 21.5" x 16"	(1) / 27.25" x 16"	(1) / 21.5" x 16"	(1) / 27.25" x 16"
Drawer Pan Capacity (pans by others)	(1) 1/2 and (1) 1/3 size pans, 6" deep	12" x 20" x 6" deep (1) full size pan, 6" deep	(1) 1/2 and (1) 1/3 size pans, 6" deep	12" x 20" x 6" deep (1) full size pan, 6" deep
Crated Shipping Weight	282 lbs.	292 lbs.	295 lbs.	346 lbs.
Crated Shipping Dimensions (L x W x H)	52.5" x 34" x 36.5"	62.5" x 34" x 36.5"	52.5" x 34" x 40.5"	62.5" x 34" x 40.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	3	3	3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	1.05	1.75	1.05	1.75
Heat Rejection (BTU / hr)	278	249	278	249
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290

Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable. Please check with your distributor for availability.



# PREP TABLES Sandwich Tops



## Refrigerators



SR27B-8



SR36B-10



SR48B-8



SR48B-12

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- 1/2" x 10" Cutting board standard
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Field reversible doors

Model Number	SR27B-8	SR36B-10	SR48B-8	SR48B-12
Interior Storage Capacity (AHAM)	6.21 ft <sup>3</sup>	8.7 ft <sup>3</sup>	12 ft <sup>3</sup>	12 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 44.25"	36" x 30" x 44.25"	48" x 34" x 44.25"	48" x 34" x 44.25"
Depth with Cutting Board installed	30.5"	30.5"	30.5"	30.5"
Depth with Doors Open at 90°	55.5"	57.5"	52.5"	52.5"
Interior Door Opening Width	22.75"	25.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	1	1	2	2
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.25" x 16"	21.25" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	8	10	8	12
Crated Shipping Weight	202 lbs.	245 lbs.	292 lbs.	301 lbs.
Crated Shipping Dimensions (L x W x H)	32" x 31.5" x 46.5"	40.5" x 32" x 46.5"	52.5" x 36" x 46.5"	52.5" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.3	2.7	3	3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	2.54	2.6	2.38	2.38
Heat Rejection (BTU / hr)	361	364.1	403	403
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290





# PREP TABLES Sandwich Tops

## Refrigerators



- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- 1/2" x 10" Cutting board standard
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Field reversible doors

Model Number	SR60B-8	SR60B-12	SR60B-16	SR72B-12	SR72B-16	SR72B-18
Interior Storage Capacity (AHAM)	14.8 ft <sup>3</sup>	14.8 ft <sup>3</sup>	14.8 ft <sup>3</sup>	18 ft <sup>3</sup>	18 ft <sup>3</sup>	18 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	60" x 30" x 44.25"	60" x 30" x 44.25"	60" x 30" x 44.25"	72" x 30" x 44.25"	72" x 30" x 44.25"	72" x 30" x 44.25"
Depth with Cutting Board installed	30.5"	30.5"	30.5"	30.5"	30.5"	30.5"
Depth with Doors Open at 90°	58.5"	58.5"	58.5"	52.5"	52.5"	52.5"
Interior Door Opening Width	25.5"	25.5"	25.5"	19.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"	23"	23"
Adjustable Shelves	2	2	2	3	3	3
Shelf Dimensions (W x D)	27.25" x 16"	27.25" x 16"	27.25" x 16"	22" x 16"	22" x 16"	22" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	8	12	16	12	16	18
Crated Shipping Weight	346 lbs.	348 lbs.	359 lbs.	404 lbs.	406 lbs.	419 lbs.
Crated Shipping Dimensions (L x W x H)	61.75" X 32" X 46.5"	61.75" X 32" X 46.5"	61.75" X 32" X 46.5"	73.75" x 32" x 46.5"	73.75" x 32" x 46.5"	73.75" x 32" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	4	4	4	4	4	4
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) NSF	4.05	4.05	4.05	5.05	5.05	5.05
Heat Rejection (BTU / hr)	575	575	575	719	719	719
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290





# PREP TABLES Sandwich Tops



## Refrigerators with Drawers



SR27B-8D2



SR48B-12D4



SR48B-12D2\*\*

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- 1/2" x 10" Cutting board standard
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stem casters standard

Model Number	SR27B-8D2	SR48B-12D4	SR48B-12D2
Interior Storage Capacity (AHAM)	6.22 ft <sup>3</sup>	12 ft <sup>3</sup>	12 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 44.25"	48" x 34" x 44.25"	48" x 34" x 44.25"
Depth With Cutting Board Installed	30.5"	30.5"	30.5"
Depth With Door Open At 90°	N/A	N/A	52.5"
Depth With Drawer Fully Open	52"	52"	52"
Door/Drawer Opening Width	19.5"	19.5"	19.5"
Adjustable Shelves / Shelf Dimensions (WxD)	N/A	N/A	(2) 21.25" x 16"
Drawer Pan Capacity (pans by others)	(1) 12 x 20 full size pan and (2) 1/4 size pans. Bottom drawer will accommodate (1) full size pan.	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pans 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	8 (6" max. pan depth)	12 (6" max. pan depth)	12 (6" max. pan depth)
Crated Shipping Weight	242 lbs	382 lbs.	355 lbs.
Crated Shipping Dimensions (L x W x H)	32"x 31.5" x 46.5"	52.5" x 36" x 46.5"	52.5" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.3	3	3
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) NSF	2.54	2.83	2.83
Heat Rejection (BTU / hr)	361	403	403
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290

\*\*Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable.





# PREP TABLES Mega Tops

## Refrigerators



- Stainless steel interior and exterior front, sides and top
- Cabinet and doors insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans
- 1/2" x 10" Cutting board with extended top for greater stability
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stem casters standard

Model Number	SR27B-12M	SR36B-15M	SR48B-12M	SR48B-18M
Interior Storage Capacity (AHAM)	6.22 ft³	8.7 ft³	12 ft³	12 ft³
Overall Dimensions (W x D x H including 6" casters)	27" x 34" x 44.25"	36" x 34" x 44.25"	48" x 34" x 44.25"	48" x 34" x 44.25"
Depth with Cutting Board installed	36.5"	36.5"	36.5"	36.5"
Depth with Doors Open at 90°	52.5"	58.5"	52.5"	52.5"
Interior Door Opening Width	22.75"	25.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	1	1	2	2
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.5" x 16"	21.2" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	12	15	12	18
Crated Shipping Weight	217 lbs.	258 lbs.	303 lbs.	315 lbs.
Crated Shipping Dimensions (L x W x H)	36" x 31.5" x 46.5"	40.5" x 36" x 46.5"	52.5" x 36" x 46.5"	52.5" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.3	2.3	3	3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	2.54	1.82	2.83	2.83
Heat Rejection (BTU / hr)	361	258	403	403
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290



# PREP TABLES Mega Tops



## Refrigerators



- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans
- 1/2" x 10" Cutting board with extended top for greater stability
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stem casters standard

Model Number	SR60B-12M	SR60B-18M	SR60B-24M	SR72B-18M	SR72B-24M	SR72B-30M
Interior Storage Capacity (AHAM)	14.8 ft <sup>3</sup>	14.8 ft <sup>3</sup>	14.8 ft <sup>3</sup>	18 ft <sup>3</sup>	18 ft <sup>3</sup>	18 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	60" x 34" x 44.25"	60" x 34" x 44.25"	60" x 34" x 44.25"	72" x 34" x 44.25"	72" x 34" x 44.25"	72" x 34" x 44.25"
Depth With Cutting Board Installed	36.5"	36.5"	36.5"	36.5"	36.5"	36.5"
Depth With Doors Open At 90°	58.5"	58.5"	58.5"	52.5"	52.5"	52.5"
Interior Door Opening Width	25.5"	25.5"	25.5"	19.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"	23"	23"
Adjustable Shelves	2	2	2	2	2	2
Shelf Dimensions (W x D)	27.25" x 16"	27.25" x 16"	27.25" x 16"	22" x 16"	22" x 16"	22" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	12	18	24	18	24	30
Crated Shipping Weight	346 lbs.	368 lbs.	383 lbs.	418 lbs.	435 lbs.	449 lbs.
Crated Shipping Dimensions (L x W x H)	61.75" x 36" x 46"	61.75" x 36" x 46"	61.75" x 36" x 46"	73.75" x 36" x 4.5"	73.75" x 36" x 46"	73.75" x 36" x 46"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	4	4	4	4	4	4
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) NSF	4.05	4.05	4.05	4.77	4.77	4.77
Heat Rejection (BTU / hr)	575	575	575	719	719	719
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290





# PREP TABLES Mega Tops

## Refrigerators with Drawers



SR27B-12MD2



SR48B-18MD4



SR60B-24MD4



SR72B-30MD6

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- 1/2" x 10" Cutting board with extended top for greater stability
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stem casters standard

Model Number	SR27B-12MD2	SR48B-18MD4	SR60B-24MD4	SR72B-30MD6
Interior Storage Capacity (AHAM)	6.22 ft <sup>3</sup>	12 ft <sup>3</sup>	14.8 ft <sup>3</sup>	18 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	27" x 34" x 44.25"	48" x 34" x 44.25"	60" x 34" x 44.25"	72" x 34" x 44.25"
Depth With Cutting Board Installed	36.5"	36.5"	36.5"	36.5"
Depth With Drawer Fully Open	52"	52"	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	12 (6" max. pan depth)	18 (6" max. pan depth)	24 (6" max. pan depth)	30 (6" max. pan depth)
Crated Shipping Weight	254 lbs.	382 lbs.	457 lbs.	539 lbs.
Crated Shipping Dimensions (L x W x H)	36" x 31.5" x 46.5"	52.5" x 36" x 46.5"	62.5" x 36" x 46.5"	73.75" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.3	3	4	4
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	2.54	2.83	4.05	5.05
Heat Rejection (BTU / hr)	361	403	575	719
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290



# PREP TABLES Mega Tops



## Drawer/Door Combinations



SR48B-18MD2



SR60B-24MD2



SR72B-30MD2



SR72B-30MD4

- Stainless steel interior and exterior front sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Door/Drawer configuration can be located in any cabinet section
- Field reversible doors

Model Number	SR48B-18MD2	SR60B-24MD2	SR72B-30MD2	SR72B-30MD4
Interior Storage Capacity (AHAM)	12 ft <sup>3</sup>	14.8 ft <sup>3</sup>	18 ft <sup>3</sup>	18 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	48" x 34" x 44.25"	60" x 34" x 44.25"	72" x 34" x 44.25"	72" x 34" x 44.25"
Depth with Cutting Board installed	36.5"	36.5"	36.5"	36.5"
Depth with Door Open at 90°	52"	58.5"	52.5"	52.5"
Depth With Drawer Fully Open	52.5"	52"	52"	52"
Shelves (#) / Dimensions (WxD)	(2) / 21.25" x 16"	(1) / 27.25" x 16"	(2) / 22" x 16"	(1) / 22" x 16"
Drawer Pan Capacity (pans by others)	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) full size pan 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	18 (6" max. pan depth)	24 (6" max. pan depth)	30 (6" max. pan depth)	30 (6" max. pan depth)
Crated Shipping Weight	355 lbs.	420 lbs.	475 lbs.	510 lbs.
Crated Shipping Dimensions (L x W x H)	52.5" x 36" x 46.5"	62.5" x 36" x 46.5"	73.75" x 36" x 46.5"	73.75" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	4	4	4
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	2.83	4.05	5.05	5.05
Heat Rejection (BTU / hr)	403	575	719	719
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290

Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable. Please check with your distributor for availability.





# PREP TABLES Pizza

## Refrigerators



PR46B



PR60B



PR67B



PR93B

- Stainless steel interior and exterior front, sides and top
- Adjustable ducted air distribution for rail/cabinet
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Full complement of 1/3rd size pans are standard
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 1/2" x 19" Cutting board standard
- Night/Day Mode- when lid is open set point drops to keep food cool in rail; when lid is closed set point returns to normal so food can stay in rail overnight without freezing

Model Number	PR46B	PR60B	PR67B	PR93B
Interior Storage Capacity (AHAM)	11.23 ft <sup>3</sup>	16.63 ft <sup>3</sup>	19.29 ft <sup>3</sup>	29.3 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	46" x 33.25" x 43.25"	60" x 33.25" x 43.25"	67" x 32.25" x 43.25"	93" x 33.25" x 43.25"
Depth with Cutting Board installed	36.25"	36.25"	36.25"	35.25"
Depth with Doors Open at 90°	59.5"	53.75"	56.75"	56.75"
Interior Door Opening Width	25.5"	19.5"	22.5"	22.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	2	4	4	6
Shelf Dimensions (W X D)	28.75" x 25.5"	21.5" x 25.5"	24.75" x 25.5"	24.75" x 25.5"
Pan Capacity (# of 1/3 size x 4" deep)	6 (6" max. pan depth)	8 (6" max. pan depth)	9 (6" max. pan depth)	12 (6" max. pan depth)
Crated Shipping Weight	336 lbs.	410 lbs.	439 lbs.	578 lbs.
Crated Shipping Dimensions (L x W x H)	48.75" x 34.75" x 45"	63.75" x 35.75" x 45"	70.75" x 35.75" x 45"	96.75" x 35.75" x 45"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	6	4	6	6
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	5.69	5.63	6.26	7.31
Heat Rejection (BTU / hr)	808	801	890	1039
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F	45° -100°F
Control Set Point Range	16° to 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)
Refrigerant	R290	R290	R290	R290





# PREP TABLES Pizza



## Refrigerators with Drawers



PR46B-D2



PR60B-D4



PR67B-D4



PR93B-D6

- Stainless steel interior and exterior front, sides and top
- Adjustable ducted air distribution for rail/cabinet
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Cabinet and drawers are insulated with 2" of CFC free, foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/3rd size pans 4" deep
- 1/2" x 19" Cutting board standard
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Night/Day Mode- when lid is open set point drops to keep food cool in rail; when lid is closed set point returns to normal so food can stay in rail overnight without freezing

Model Number	PR46B-D2	PR60B-D4	PR67B-D4	PR93B-D6
Interior Storage Capacity (AHAM)	11.23 ft <sup>3</sup>	16.63 ft <sup>3</sup>	19.29 ft <sup>3</sup>	29.34 ft <sup>3</sup>
Overall Dimensions (W x D x H including casters)	46" x 32.25" x 43.25"	60" x 33.25" x 43.25"	67" x 33.25" x 43.25"	93" x 33.25" x 43.25"
Depth with Cutting Board installed	35.25"	35.25"	36.25"	36.25"
Depth with Drawer Fully Open	56.5"	56.5"	57.5"	57.5"
Drawer Pan Capacity (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans
Pan Capacity (# of 1/3 size x 4" deep)	6	8	9	12
Crated Shipping Weight	383 lbs.	450 lbs.	531 lbs.	711 lbs.
Crated Shipping Dimensions (L x W x H)	48.75" x 34.75" x 45"	63.75" x 35.75" x 45"	70.75" x 35.75" x 45"	95.75" x 35.75" x 45"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	4	4	6	6
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	5.69	5.63	6.26	7.31
Heat Rejection (BTU / hr)	808	801	890	1039
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F	45° -100°F
Control Set Point Range	16° to 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)
Refrigerant	R290	R290	R290	R290





# PREP TABLES PIZZA

## Drawer/Door Combinations



PR67B-D2



PR93B-D2



PR93B-D4

- Stainless steel interior and exterior front sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/3rd size pans 4" deep
- Door/Drawer configuration can be located in any cabinet section
- Enamel coated evaporator coil

- Adjustable ducted air distribution for rail/cabinet
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Night/Day Mode- when lid is open set point drops to keep food cool in rail; when lid is closed set point returns to normal so food can stay in rail overnight without freezing

Model Number	PR67B-D2	PR93B-D2	PR93B-D4
Interior Storage Capacity (AHAM)	19.29 ft <sup>3</sup>	29.3 ft <sup>3</sup>	29.3 ft <sup>3</sup>
Overall Dimensions (W x D x H including 6" casters)	67" x 33.25" x 43.25"	67" x 33.25" x 43.25"	67" x 33.25" x 43.25"
Depth with Cutting Board installed	36.25"	36.25"	36.25"
Depth with Door Open at 90°	57.75"	56.75"	56.75"
Depth with Drawer Fully Open	57.5"	56.5"	56.5"
Door Opening Width	22.5"	22.5"	22.5"
Door Opening Height	23"	23"	23"
Shelves (#) / Dimensions (WxD)	(2) / 24.75" x 25.5"	(4) / 24.75" x 25.5"	(4) / 24.75" x 25.5"
Drawer Pan Capacity (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans
Pan Capacity (# of 1/3 size x 4" deep)	9	12	12
Crated Shipping Weight	486 lbs.	620 lbs.	675 lbs.
Crated Shipping Dimensions (L x W x H)	70.75" x 35.75" x 45"	96.75" x 35.75" x 45"	96.75" x 35.75" x 45"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	6	6	6
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) NSF	6.26	7.31	7.31
Heat Rejection (BTU / hr)	890	1039	1039
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F
Temperature Range	16° - 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)
Refrigerant	R290	R290	R290

Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable. Please check with your distributor for availability.



# EQUIPMENT STANDS



## Refrigerator Equipment Stands



CR36A



CR49A



CR60A



CR72A



CR85A



CR98A



CR110A

- Stainless steel interior and exterior front, sides and top
- 16 gauge stainless steel top with marine edge front and rear and 1" turn-up at each end
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Top is provided with an exclusive, built in, ceramic heat shield
- Standard with (4-8) 4" casters all with brakes
- Electronic controls

Model Number	CR36A	CR49A	CR60A	CR72A	CR85A	CR98A	CR110A
Interior Storage Capacity (AHAM)	6.12 ft <sup>3</sup>	9.52 ft <sup>3</sup>	9.52 ft <sup>3</sup>	15.44 ft <sup>3</sup>	18.95 ft <sup>3</sup>	22.2 ft <sup>3</sup>	22.2 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	36.5" x 32.25" x 27"	49" x 32.25" x 27"	60.5" x 32.25" x 27"	72.52" x 32.25" x 27"	85" x 32.25" x 27"	98" x 32.25" x 27"	110.5" x 32.25" x 27"
Depth with Drawer Fully Open	55.75"	55.75"	55.75"	55.75"	55.75"	55.75"	55.75"
Maximum Pan Depth	6"	6"	6"	6"	6"	6"	6"
Worktop Maximum Load Capacity	700 lbs	700 lbs	700 lbs	1200 lbs	1200 lbs	1500 lbs	1500 lbs
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pans and (1) 1/2 long pan 6" deep (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	Left drawers: (3) 12" x 20" x 6" deep pans Right drawers: (2) 12" x 20" x 6" deep pans	(3) 12" x 20" x 6" deep pans	(3) 12" x 20" x 6" deep pans
Pan Capacity (12" x 20")	2	2.5	2.5	8	10	12	12
Crated Shipping Weight	295 lbs.	327 lbs.	370 lbs.	500 lbs.	567 lbs.	640 lbs.	671 lbs.
Crated Shipping Dimensions (L x W x H)	38" x 34.5" x 30.5"	51" x 35.5" x 30.5"	62" x 35.5" x 30.5"	74" x 34.5" x 30.5"	87.25" x 34.5" x 30.5"	100" x 34.5" x 30.5"	112.5" x 34.5" x 30.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.2	2.7	2.7	3.0	3.0	3.0	3.0
HACR Breaker (AMP)	15	15	15	15	15	15	15
Energy Consumption (kWh / day) NSF	1.6	2.1	2.1	2.78	2.9	3.69	3.69
Heat Rejection (BTU / hr) @ NSF	223	303	303	395	415	525	525
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290	R290



# GLASS DOOR MERCHANDISER FREEZER



- ▶ Silver painted galvanized steel exterior and interior with NSF approved white steel interior and stainless steel floor
- ▶ Forced air evaporator for quick temperature pull down
- ▶ Energy saving hot gas loop and an electric glass door heater

Model Number	FM-23-HC
Overall Dimensions (W x D x H) Including Leveling Feet	30" x 29.75" x 78"
Adjustable Shelves	5
Shelf Dimensions (W x D)	24.56" x 23.25"
Crated Shipping Weight	385 lbs.
Crated Shipping Dimensions (L x W x H)	33" x 32.5" x 85.25"
Voltage	115V/60/1
Amperage (AMP)	4.8
HACR Breaker (AMP)	15
Voltage Range	104 - 127
Ambient Temp. Range	60° - 86°F
Control Set Point Range	-10° to -0°F
Refrigerant	R290



# GLASS DOOR Merchandisers



GDM models are also available in white and black.



**RM-7-HC**

**RM-10-HC**★

**RM-26-HC**★

**RM-45-SD-HC**★  
(Sliding doors)

**RM-49-HC**★

**RM-65-HC**

- Environmentally friendly R290 hydrocarbon refrigerant
- Forced air evaporator for quick temperature pull down
- Large glass door(s) is energy efficient low-E multi pane glass
- Doors mounted on heavy duty hinges with self-closing mechanism
- Three year parts and labor warranty & Five year compressor warranty
- Locks on doors are standard (accept for RM-7-HC)

Model Number	RM-7-HC	RM-10-HC	RM-26-HC	RM-45-SD-HC	RM-49-HC	RM-65-HC
Color Options	grey (as shown), black, white	grey (as shown), black, white	grey (as shown), black, white	grey (as shown), black, white	grey (as shown), black, white	grey (as shown), black, white
Interior Storage Capacity (AHAM)	7 ft³	10 ft³	26 ft³	38.26 ft³	49 ft³	56.04 ft³
Capacity	20 oz. bottles: 102 12 oz. cans: 217	20 oz. bottles: 168 12 oz. cans: 384	20 oz. bottles: 360 12 oz. cans: 900	20 oz. bottles: 560 12 oz. cans: 1260	20 oz. bottles: 630 12 oz. cans: 1440	20 oz. bottles: 830 12 oz. cans: 1926
Overall Dimensions (W x D x H Including Leveling Feet)	21" x 25.25" x 39"	25" x 22.5" x 54.75"	29.75" x 29.75" x 79.75"	51" x 29" x 79.5"	60" x 29.75" x 78"	78" x 29.75" x 78"
Adjustable Shelves	2 adjustable, 1 floor shelf	3	5	5 per section	5 per section	5 per section
Shelf Dimensions (W x D)	17.75" x 20.75" 18" x 9.25" (Floor)	21" x 17.5"	25.75" x 24"	23" x 20.5"	27" x 21.75"	(C) 27.3" x 21.7" (L/R) 22.4" x 21.7"
Crated Shipping Weight	180 lbs.	230 lbs.	331 lbs.	520 lbs.	610 lbs.	800 lbs.
Crated Shipping Dimensions (L x W x H)	28" x 24.5" x 44"	30" x 28" x 60"	34" x 34" x 82"	54" x 32.25" x 84"	63" x 32.25" x 86"	81" x 32.25" x 84"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3.2	1.8	3.5	6.5	7.6	8.2
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ENERGY STAR / DOE	1.38	1.1	1.81	4.55	4.37	5.67
Approx. Nominal Compress BTU/HR (HP)	1/8HP	1/5HP	1/3HP	1/2HP	1/2HP	(L) 1/3HP (R) 1/3HP
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F
Factory Set Point Range	35° - 44°F	35° - 43°F	35° - 44°F	38° - 47°F	35° - 44°F	35° - 43.5°F
Refrigerant	R290	R290	R290	R290	R290	R290







**Stainless steel** interior and LED lights on BB & DD models

**Black vinyl coated** exterior front, sides, and rear

Polished stainless-steel **insulated towers** with plated brass faucets

**Keg cushions** standard with DD models—protects floor and allows air flow around kegs

**Heavy duty** 18-gauge stainless steel top

Stainless steel threshold **protects DD door frame** from damage when loading and unloading

Front breathing, side mount refrigeration for **zero clearance** and easy accessibility

All units **standard with locks** in each section



**BB Series**  
**Back Bar Refrigerators**  
**with Swing Door**  
(Solid or Glass)

59" to 95" Models

**DD Series**  
**Direct Draw Refrigerator with**  
**Swing Door**

24" to 95" Models

**CC Series**  
**Bottle Coolers with**  
**Slide Top**

50" to 95" Models



**HOSHIZAKI**



# BACK BAR Refrigerators



**BB59**



**BB69**



**BB80**



**BB95**

- Stainless steel interior with LED lights
- Heavy duty 18-gauge stainless steel top
- Maximum product storage capacity with the ability to store tall boys three high per section
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Doors come with a stainless steel interior liner are self-closing and include locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient

Model Number	BB59(-S*)	BB69(-S*)	BB80(-S*)	BB95(-S*)
Cabinet Dimensions W x D x H	59.5" x 29" x 36.88"	69.5" x 29" x 36.88"	80" x 29" x 36.88"	95.5" x 29" x 36.88"
Capacity (AHAM) cu ft	18.16 ft <sup>3</sup>	21.8 ft <sup>3</sup>	28.74 ft <sup>3</sup>	32.53 ft <sup>3</sup>
Capacity 12oz. cans	852	1014	1092	1302
Door(s)	2	2	3	3
Shelves	4	4	6	6
Capacity 1/2 Barrels	3	3	4	5
HP	1/3	1/3	1/3	1/3
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	2.5	2.5	2.5
NEMA Plug	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P
Shipping Dimensions W x D x H	62.5" x 31.25" x 42.75"	72.5" x 31.25" x 42.75"	82.5" x 31.25" x 42.75"	98.5" x 31.25" x 42.75"
Shipping Weight	315 lbs. 320(-S*) lbs.	350 lbs. 390(-S*) lbs.	375 lbs. 420(-S*) lbs.	450 lbs. 480(-S*) lbs.
Refrigerant	R290	R290	R290	R290

\*(-S) Stainless Steel Exterior option available - Made to order.



# BACK BAR Refrigerators

## Refrigerators with Glass Doors



**BB59-G**



**BB69-G**



**BB80-G**



**BB95-G**

- Stainless steel interior with LED lights
- Heavy duty 18-gauge stainless steel top
- Maximum product storage capacity with the ability to store tall boys three high per section
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Energy efficient Low-E Multi pane glass self-closing doors come standard with barrel locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient

Model Number	BB59-G(-S*)	BB69-G(-S*)	BB80-G(-S*)	BB95-G(S*)
Capacity (AHAM) cu ft	18.45 ft <sup>3</sup>	21.80 ft <sup>3</sup>	26.74 ft <sup>3</sup>	32.53 ft <sup>3</sup>
Cabinet Dimensions W x D x H	59.5" x 29" x 36.88"	69.5" x 29" x 36.88"	80" x 29" x 36.88"	95.5" x 29" x 36.88"
Capacity 12oz. cans	852	1014	1092	1302
Door(s)	2	2	3	3
Shelves	4	4	6	6
Capacity 1/2 Barrels	3	3	4	5
HP	1/3	1/3	1/3	1/3
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	2.5	2.5	2.5
NEMA Plug	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P
Shipping Dimensions W x D x H	62.5" x 31.25" x 42.75"	72.5" x 31.25" x 42.75"	82.5" x 31.25" x 42.75"	98.5" x 31.25" x 42.75"
Shipping Weight	310 lbs. 330(-S*) lbs.	345 lbs. 395(-S*) lbs.	370 lbs. 430(-S*) lbs.	435 lbs. 490(-S*) lbs.
Refrigerant	R290	R290	R290	R290

\*(-S) Stainless Steel Exterior option available - Made to order.



# SLIDE TOP Bottle Coolers



## Refrigerators & Freezers



CC50



CC65



CC80



CC95

- Stainless steel interior
- Heavy duty 18-gauge stainless steel top
- Front breathing, side mount refrigeration is easily accessible by sliding out front for cleaning and service
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Durable stainless steel slide top lids including locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient


Model Number	CC50(-S*)	CC65(-S*)	CC80(-S*)	CC95(-S*)
Capacity (AHAM) cu ft	14.4 ft <sup>3</sup>	19.6 ft <sup>3</sup>	24.67 ft <sup>3</sup>	27.98 ft <sup>3</sup>
Cabinet Dimensions† W x D x H	50.5" x 31.25" x 39"	65.5" x 26.5" x 33.38"	80" x 26.5" x 33.38"	95" x 26.5" x 33.38"
Capacity 12oz. / 20oz. Cans	704 / 286	890 / 360	1150 / 547	1408 / 672
Lids	2	2	3	3
Bin Dividers	3	4	6	7
HP	1/4	1/3	1/3	1/2
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.0	2.0	2.0	2.0
NEMA Plug	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P
Shipping Dimensions W x D x H	53.5" x 31.25" x 39"	68.5" x 31.25" x 39"	82.5" x 31.25" x 39"	98.5" x 31.25" x 39"
Shipping Weight	235 lbs.	275 lbs.	315 lbs.	355 lbs.
Refrigerant	R290	R290	R290	R290

\*(-S) Stainless Steel Exterior option available - Made to order.

† Does not include 1" rear cabinet bumper or bottle cap catcher depth



# DIRECT DRAW Refrigerators

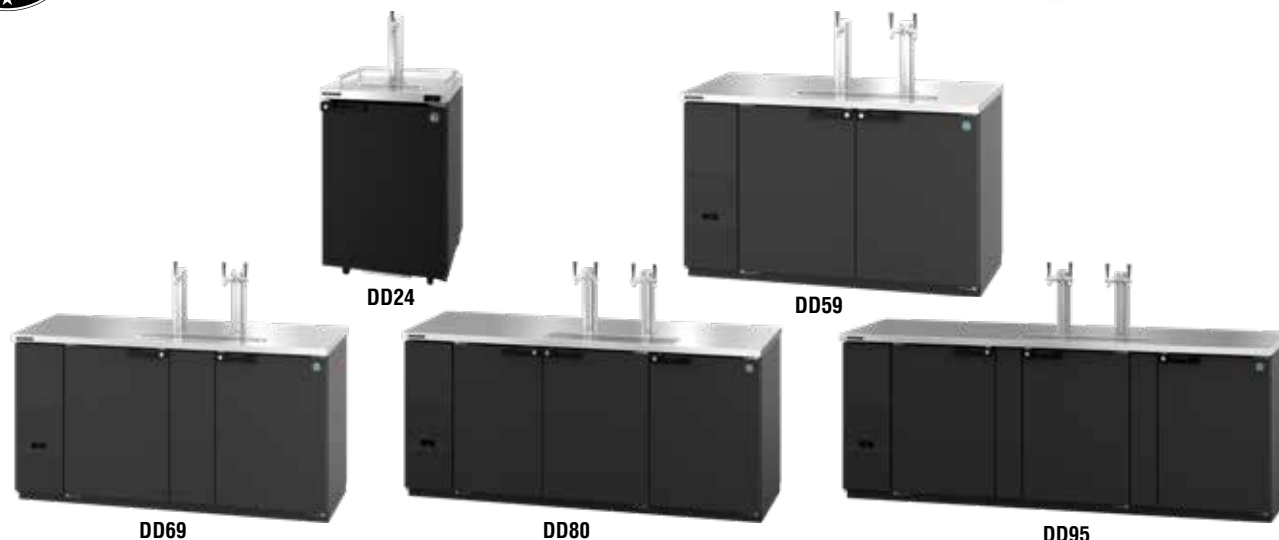

- Stainless steel interior
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Heavy duty 18-gauge stainless steel top

- Stainless steel threshold protects door frame from damage when loading and unloading
- Polished stainless-steel insulated towers with plated brass faucet
- Keg cushions standard to protect floor and increase air flow around kegs

Model Number	DD24(-S*)	DD59(-S*)	DD69(-S*)	DD80(-S*)	DD95(-S*)
Capacity (AHAM) cu ft	7.46 ft <sup>3</sup>	18.45 ft <sup>3</sup>	21.8 ft <sup>3</sup>	28.74 ft <sup>3</sup>	32.53 ft <sup>3</sup>
Cabinet Dimensions W x D x H	24.88" x 30" x 39.38"	59.5" x 29" x 36.88"	69.5" x 29" x 36.88"	80" x 29" x 36.88"	95.5" x 29" x 36.88"
Door(s)	1	2	2	3	3
Tower(s)	1	2	2	2	2
Tap(s)	1	3	3	4	4
Capacity 1/2 Barrels	1	2**	3	4	5
HP	1/6	1/3	1/3	1/3	1/3
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	1.5	2.5	2.5	2.5	2.5
NEMA Plug	5-15P	5-15P	5-15P	5-15P	5-15P
Shipping Dimensions W x D x H	34.5" x 29" x 45.5"	62.5" x 31.25" x 42.5"	72.5" x 31.25" x 42.5"	82.5" x 31.25" x 42.5"	98.5" x 31.25" x 42.5"
Shipping Weight	175 lbs.	345 lbs. 310(-S*) lbs.	360 lbs. 350(-S*) lbs.	385 lbs. 375(-S*) lbs.	430 lbs. 420(-S*) lbs.
Refrigerant	R290	R290	R290	R290	R290

\*(-S) Stainless Steel Exterior option available - Made to order.

\*\* DD59 will also accommodate (1)1/4 slim keg.

# SUSHI Cases



## Features & Benefits of HOSHIZAKI Sushi Cases

- Energy efficient LED lights with on/off switch
- Elegant curved front glass design enhances product on display
- Condenser airflow comes in the back and out the side
- Large diameter 1" drain at front, vinyl hose included
- NSF approved thermometer
- Easy to clean ceiling
- Plate space on top of unit, 5.6 inches
- Larger front to back interior, 11 inches
- Interior floor has a radius at all four sides
- Self-contained refrigeration unit - easy to install
- Large diameter upper evaporator with tin plating
- Slightly taller doors with plastic seal at end, opposite of the handle
- Solid food plates with radius groove to fit sushi foods
- Energy-efficient and environmentally friendly R600a refrigerant



Model Number	Condenser	Refrigeration Unit Location (Front View)	Dimensions W x D x H	Shipping Dimensions W x D x H	Electrical	Shipping Weight
<b>HNC-120BA-R-SLH</b>	Air-Cooled	Right Side	47.2" x 13.6" x 11"	51.5" x 16.25" x 20.25"	115V/60/1	94 Lbs.
<b>HNC-120BA-L-SLH</b>	Air-Cooled	Left Side	47.2" x 13.6" x 11"	51.5" x 16.25" x 20.25"	115V/60/1	94 Lbs.
<b>HNC-150BA-R-SLH</b>	Air-Cooled	Right Side	59.1" x 13.6" x 11"	62.25" x 16.25" x 20.25"	115V/60/1	115 Lbs.
<b>HNC-150BA-L-SLH</b>	Air-Cooled	Left Side	59.1" x 13.6" x 11"	62.25" x 16.25" x 20.25"	115V/60/1	115 Lbs.
<b>HNC-180BA-R-SLH</b>	Air-Cooled	Right Side	70.9" x 13.6" x 11"	74" x 16.25" x 20.25"	115V/60/1	130 Lbs.
<b>HNC-180BA-L-SLH</b>	Air-Cooled	Left Side	70.9" x 13.6" x 11"	74" x 16.25" x 20.25"	115V/60/1	130 Lbs.
<b>HNC-210BA-R-SLH</b>	Air-Cooled	Right Side	82.7" x 13.6" x 11"	85.75" x 16.25" x 20.25"	115V/60/1	145 Lbs.
<b>HNC-210BA-L-SLH</b>	Air-Cooled	Left Side	82.7" x 13.6" x 11"	85.75" x 16.25" x 20.25"	115V/60/1	145 Lbs.


"R" - Condensing Unit is on RIGHT from front view

"L" - Condensing Unit is on LEFT from front view


Not intended for overnight storage. NSF Standard 7




**HNC-120BA-L-SLH**

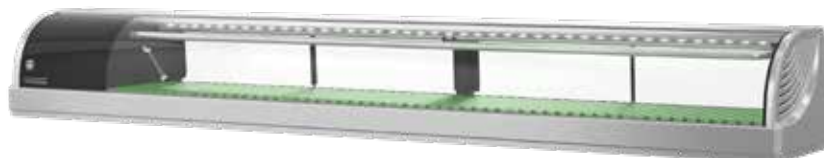

**HNC-210BA-L-SLH**

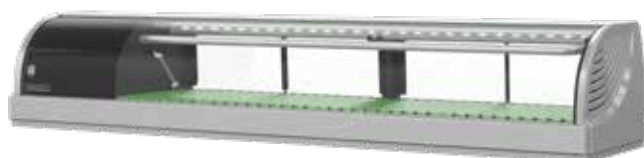

**HNC-150BA-L-SLH**

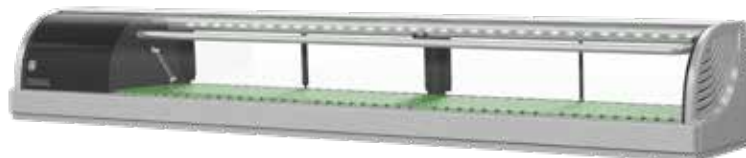

**HNC-180BA-L-SLH**



# ECONOMY Refrigerators



ER1A-FS★



ER2A-FS★

- Stainless steel interior floor with aluminum sides, rear, and top
- Stainless steel exterior door(s) come standard with lock(s)
- Energy efficient interior LED light

- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section. 105 lbs. capacity

Model Number	ER1A-FS	ER2A-FS
Interior Storage Capacity (AHAM)	17.8 ft <sup>3</sup>	38.61 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 29.63" x 81.63"	54.38" x 29.63" x 81.63"
Depth with Doors Open at 90°	55.38"	55.38"
Interior Door Opening Width	22.25"	22.9"
Interior Door Opening Height	52.1"	52.1"
Adjustable Shelves	3	6
Shelf Dimensions (W x D)	21.5" x 23.1"	24.3" x 21.7"
Crated Shipping Weight	279 lbs.	523 lbs.
Crated Shipping Dimensions (L x W x H)	31.5" x 28.75" x 84"	58" x 31.5" x 84"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	2	4.3
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	1.06	2.1
Heat Rejection (BTU / hr)	1960(1/5HP)	4291(1/3HP)
Voltage Range	103 - 127	103 - 127
Ambient Temp. Range	45° to 100°F	45° to 100°F
Control Set Point Range	33° to 39°F	33° to 39°F
Refrigerant	R290	R290





# ECONOMY Freezers



EF1A-FS ★



EF2A-FS

- Stainless steel interior floor with aluminum sides, rear, and top
- Stainless steel exterior door(s) come standard with lock(s)
- Energy efficient interior LED light

- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section. 105 lbs. capacity

Model Number	EF1A-FS	EF2A-FS
Interior Storage Capacity (AHAM)	17.74 ft³	38.54 ft³
Overall Dimensions (W x D x H including 4" casters)	27" x 29.63" x 81.63"	54.38" x 29.63" x 81.63"
Depth with Doors Open at 90°	55.38"	55.38"
Interior Door Opening Width	22.25"	22.9"
Interior Door Opening Height	52.1"	52.1"
Adjustable Shelves	3	6
Shelf Dimensions (W x D)	21.5" x 23.1"	24.3" x 21.7"
Crated Shipping Weight	279 lbs.	523 lbs.
Crated Shipping Dimensions (L x W x H)	31.5" x 28.75" x 84"	58" x 31.5" x 84"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	3.2	4.7
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	4.62	8.8
Heat Rejection (BTU / hr)	1399(1/3HP)	2074(1/2HP)
Voltage Range	103 - 127	103 - 127
Ambient Temp. Range	45° to 100°F	45° to 100°F
Control Set Point Range	-5° to 5°F	-5° to 5°F
Refrigerant	R290	R290





# ECONOMY Undercounters

## Refrigerators



EUR27A★



EUR48A★

- Stainless steel interior floor with aluminum sides, rear, and top
- Stainless steel exterior door(s) come standard with lock(s)
- Energy efficient interior LED light
- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section. 105 lbs. capacity

Model Number	EUR27A	EUR48A
Interior Storage Capacity (AHAM)	6.33 ft <sup>3</sup>	12.09 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	47.75" x 30" x 33.75"
Depth with Doors Open at 90°	54.5"	51.5"
Interior Door Opening Width	22.6"	19.5"
Interior Door Opening Height	22.75"	22.75"
Adjustable Shelves	1	2
Shelf Dimensions (W x D)	22" x 16"	21.25" x 16"
Crated Shipping Weight	200 lbs.	290 lbs.
Crated Shipping Dimensions (L x W x H)	33" x 29" x 37"	52" x 33" x 37"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	1.5	1.8
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	0.95	1.21
Heat Rejection (BTU / hr)	1289(1/6HP)	1709(1/6HP)
Voltage Range	115-127	115-127
Ambient Temp. Range	45° to 100°F	45° to 100°F
Control Set Point Range	-5° to °F	33° to 39°F
Refrigerant	R290	R290



# ECONOMY Undercounters



## Freezers



EUF27A ★



EUF48A




- Stainless steel interior floor with aluminum sides, rear, and top
- Stainless steel exterior door(s) come standard with lock(s)
- Energy efficient interior LED light
- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section. 105 lbs. capacity

Model Number	EUF27A	EUF48A
Interior Storage Capacity (AHAM)	6.33 ft <sup>3</sup>	12.09 ft <sup>3</sup>
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	47.75" x 30" x 33.75"
Depth with Doors Open at 90°	55.75"	52.75"
Interior Door Opening Width	22.6"	19.5"
Interior Door Opening Height	22.75"	22.75"
Adjustable Shelves	1	2
Shelf Dimensions (W x D)	22" x 16"	21.25" x 16"
Crated Shipping Weight	200 lbs.	290 lbs.
Crated Shipping Dimensions (L x W x H)	33" x 29" x 37"	52" x 33" x 37"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	1.2	1.7
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	1.92	3.44
Heat Rejection (BTU / hr)	993(1/6HP)	1468(1/6HP)
Voltage Range	115-127	115-127
Ambient Temp. Range	45° to 100°F	45° to 100°F
Control Set Point Range	-5° to 5°F	-5° to 5°F
Refrigerant	R290	R290





# ICE ACCESSORIES

Model Number	Description	For Use With
HS-0229	DS Door Reversal Part (Order as a Service Part)	AM-50BAJ, C-80BAJ
HS-5061	Drain Pump (Beckett Brand) 1 Year Warranty - Parts & labor (order as accessory)	AM-50BAJ, C-80BAJ, KM-81BAJ, KM-116BAJ
HS-0182	Side Trim Kit	AM-50BAJ, C-80BAJ
HS-2133	2" Top Spacer Kit available	AM-50BAJ, C-80BAJ
 H9320-51	Recommended Water Filtration - Single Configuration	AM-50BAJ, C-80BAJ, KM-81BAJ, KM-116BAJ, KM-161B_J, KM-231BAJ, KM-301B_J, KM-350M_J, KM-520M_J, KM-660M_J, KMD-410M_J, KMD-530M_J, KML-325M_J, KML-500M_J, KML-700M_J, IM-500SAB, F-300BAJ, F-330BAJ, F-500BAJ, F-450MAJ, F-801M_J, F-1002M_J, F-1501M_J, F-2001M_J, F-330BAJ-C, F-450MAJ-C, F-801M_J-C, F-1002M_J-C, F-1501M_J-C, F-2001MRJ-C, FD-650M_J-C, FD-1002M_J-C, FS-1001MLJ-C, FS-1022MLJ-C, FS-1501MLJ-C
 H9320-52	Recommended Water Filtration - Double Configuration	KM-901M_J, KM-1100M_J, KMD-860M_J, IM-50BAA-Q, KMS-822MLJ, KMS-1122MLJ, KMS-1402MLJ
 H9320-53	Recommended Water Filtration - Triple Configuration	IM-50BAA-Q, IM-200BAC, KM-1301S_J, KM-1340M_J, KM-1601MRJ, KM-1601S_J, KM-1900S_J, KM-2200S_J3, KM-2600S_J3, KMH-2100S_J, KMS-2000MLJ
HS-5426	Tamper Proof Kit - Air-Cooled Units	KM-350M_J, KM-520M_J, KM-660M_J
HS-5427	Tamper Proof Kit - Water/Remote Units	KM-520M_J, KM-660M_J
HS-5245	Tamper Proof Kit - Air-Cooled Units	KM-901M_J, KM-1100M_J
HS-5246	Tamper Proof Kit - Water/Remote Units	KM-901M_J, KM-1100M_J
HS-5252	Tamper Proof Kit - Air-Cooled Units	KM-1301S_J, KM-1601S_J
HS-5253	Tamper Proof Kit - Water/Remote Units	KM-1301S_J, KM-1601S_J
HS-5030	Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral)	KM-1340M_J, KM-1601MRJ, KM-1601S_J, KM-1900S_J, KMH-2100S_J
HS-5062	Extension bracket for Freestyle application	KMS-822MLJ
HS-5255	Tamper Proof Kit	KM-2200S_J3, KM-1900S_J
LP-6 LEG	Four 6" Stainless Steel Legs Package available (optional)	F-300BAJ, F-330BAJ, F-500BAJ, F-330BAJ-C, B-250SF, B-500SF, BD-500SF, B-700SF, B-800SF, B-900SF
HS-2120	Cutter head for finer flaked ice	F-801M_J, F-1002M_J, F-801M_J
HS-2036	Top Kit for KM-350M, KM-520M or KM-660M	DM-200B
DM Legs	Four 4" Black Die Cast Legs Kit	DM-200B
HS-5329	Top Kit for for FS-1022MLJ-C	DM-4420N
HS-5330	Top Kit for for FD-650M_J-C & FD-1002M_J-C	DM-4420N, IM-500SAB
HS-5441	Replacement All-in-One Filter Cartridge, HS-5441 (pack of 2)	DWM-20A
HS-5442	Replacement Alkaline Chamber	DWM-20A
HS-5504	6-Month Replacement Kit: Filters (2 ea.) alkaline chamber, air filter, nozzle tip w/aerator	DWM-20A
HS-5542	DWM Top Kit for SD-271	DWM-20A
HS-5560	Large Square Anti-Microbial Cover (50 mm $\phi$ 50 mm)	DWM-20A
HS-2033	Order 8" Top Kit to accommodate 22"W ice machines	B-250SF, B-900SF, B-500SF
HS-5429	Bin Door Catch	B-250SF
HS-2035	Order 22" Top Kit to accommodate 30"W ice machines	B-800SF, B-900SF, B-700SF
HS-2032	4" Top Kit to accommodate (2) 22"W ice machines	B-800SF, B-900SF
HS-2132	Top Kit: KMD application	B-900SF
HS-2129	Top Kit: KMD application	B-500SF
HS-2034	Order 14" Top Kit to accommodate 30"W ice machines	B-700SF, B-800SF
HS-2130	Top Kit: KMD application	B-700SF
HS-2066	Seismic Kit for SD 500 Stands	SD Stands
HS-2071	Leg Seismic Kit SD 500 Stands	SD Stands
HS-5587	25' Brazing Required R-404A	URC-5FZ
HS-5588	35' Brazing Required R-404A	URC-5FZ
HS-2150	Quick-Connect Kit (not required if line set is ordered)	URC-5FZ

Model Number	Description	For Use With
HS-5604	25' Brazing Required R-404A	URC-9FZ
HS-5505	35' Brazing Required R-404A	URC-9FZ, URC-14FZ
HS-5606	55' Brazing Required R-404A	URC-9FZ, URC-14FZ
HS-5299	25' Brazing Required R-404A	SRC-10J
HS-5300	35' Brazing Required R-404A	SRC-10J
HS-5301	55' Brazing Required R-404A	SRC-10J
HS-5102	Hail Guard Kit	URC-14FZ
HS-0243	25' Brazing Required R-404A	SRK-20J, SRK-20J3
HS-0244	35' Brazing Required R-404A	SRK-20J, SRK-20J3
HS-0245	55' Brazing Required R-404A	SRK-20J, SRK-20J3
HS-5600	Booster Antenna	Remote Monitoring System
HS-5607	Optional Bin Scoop Holder	All SF Bins
HS-5323	25' Brazing Required R-404A	URC-22FZ
HS-5324	35' Brazing Required R-404A	URC-22FZ
HS-5325	55' Brazing Required-404A	URC-22FZ
HS-5095	Hail Guard Kit	URC-22FZ
HS-0250	25' Brazing Required R-404A	SRK-10J, SRK-12J, SRK-12J3, SRK-15J, SRK-15J3
HS-0251	35' Brazing Required R-404A	SRK-10J, SRK-12J, SRK-12J3, SRK-15J, SRK-15J3
HS-0252	55' Brazing Required R-404A	SRK-10J, SRK-12J, SRK-12J3, SRK-15J, SRK-15J3
HS-5323	25' Brazing Required R-404A	SRC-14J
HS-5324	35' Brazing Required R-404A	SRC-14J
HS-5325	55' Brazing Required R-404A	SRC-14J
HS-5587	Brazed Line Set 25 Ft for URC-5FZ	URC-5FZ
HS-5588	Brazed Line Set 35 Ft for URC-5FZ	URC-5FZ
H9320-54	Single - Medical System	Single Manifold System - Medical

#### DCM(-OS), DB & DKM - DISPENSERS ACCESSORIES

Model Number	Description	For Use With
LP-4 LEG	Four 4" Stainless Steel Legs Package available (optional)	DCM-271BAH(-OS)
LP-6 LEG	Four 6" Stainless Steel Legs Package available	DCM-300BAH(-OS), DCM-500BAH(-OS), DCM-75_B_H(-OS), DB-200H
LP-6P LEG	Four 6" Painted Legs Package available	DCM-300BAH(-OS), DCM-500BAH(-OS), DCM-75_B_H(-OS)
LP-6 FLANGE LEG	Four 6" Stainless Steel Legs Package available	DB-130H, B-300SF, BD-300SF, SD Stands
SD-271	Equipment Stand	DCM-271BAH(-OS)
SD-500	Equipment Stand	DCM-300BAH-OS, DCM-500BAH(-OS)
SD-750	Equipment Stand	DCM-75_B_H(-OS)
HS-2036	Top Kit for KM-350M, KM-520M or KM-660M	DB-200H
HS-2066	Seismic Wall Mount Kit	DCM-300BAH(-OS), DCM-500BAH(-OS)
HS-2067	Seismic Wall Mount Kit	DCM-75_B_H(-OS)
HS-2070	Seismic Wall Mount Kit	DCM-271 BAH(-OS)
HS-2071	Leg Seismic Kit	DCM-300BAH-OS, DCM-500BAH(-OS)
HS-2072	Leg Seismic Kit	DCM-75_B_H(-OS)
HS-2104	Wall Mount Kit	DCM-271BAH(-OS)
HS-2109	Chute & grill replacement kit	DB-130H, DB-200H
HS-3586	6" Casters - Set of 4	6" Casters - Set of 4
HS-5559	Round Anti-Microbial Cover (25 mm diameter)	DCM-300BAH, DCM-500BAH, DCM-75_B_H
H9320-54	4H-SI Water Filter Hoshizaki Healthcare Filtration System - Single Configuration	DCM-271BAH, DCM-300BAH, DCM-500BAH, DCM-75_B_H
H9655-08	4H-SI Water Filter Hoshizaki Healthcare Filtration System - Cartridge (1 pk)	DCM-271BAH, DCM-300BAH, DCM-500BAH, DCM-75_B_H



# REFRIGERATION ACCESSORIES

## CASTERS & LEGS

Model Number	Description	For Use With
HS-3546	4" Casters - Set of four, two with brakes	1/2 Section Uprights
HS-3547	4" Casters - Set of six, three with brakes	3 Section Uprights
HS-5035	4" Casters - Set of four, two with brakes	1, 2 & 3 Section Horizontal Units
HS-5036	6" Casters - Set of four, two with brakes	1, 2 & 3 Section Horizontal Units
HS-5037	2 1/4" Casters - Set of four, two with brakes for ADA Compliant dimensions	1 & 2 Section Undercounters
HS-5320	3 3/8" Casters - Set of four, two with brakes for ADA Compliant dimensions	for pizza preps
HS-5321	3 3/8" Casters - Set of six, three with brakes for ADA Compliant dimensions	for pizza preps
HS-5662	4" Casters with Shims (6pk)	BB80, BB95, BB80-G, BB95-G, CC80, CC95, DD80, DD95
HS-5663	4" Casters with Shims (4pk)	BB59, BB69, BB59-G, BB69-G, CC50, CC65, DD59, DD69
LP-6 LEG	6" Stainless Steel Legs, set of 4	1, 2 & 3 Section Upright Models [3 section needs 2 sets] & pizza preps
LP-6P LEG	6" Painted Leg (grey), set of 4	1, 2 & 3 Section Upright Models [3 section needs 2 sets]& pizza preps

## FOOT PEDALS

Model Number	Description	For Use With Steelheart® Models
HS-5378	One Door Foot Pedal (right foot pedal)	Left Hinge - upright, solid door Steelheart® models
HS-5379	One Door Foot Pedal (left foot pedal)	Right Hinge - upright, solid door Steelheart® models
HS-5380	Two Door Foot Pedal	2 & 3 Section Uprights
HS-5555	Left-Hinged Door Foot Pedal (right foot pedal)	Solid door undercounter, worktop and sandwich preps
HS-5556	Right-Hinged Door Foot Pedal (left foot pedal)	Solid door undercounter, worktop and sandwich preps

## DOOR REVERSAL KIT

Model Number	Description
HS-5258	Door Reversal Kit - Undercounter Glass Door Models (Right Hinge to Left Hinge)
HS-5259	Door Reversal Kit - Undercounter Glass Door Models (Left Hinge to Right Hinge)

## SHELVES

Model Number	Description	For Use With Steelheart® Models
HS-5052	Industrial Strength Epoxy Coated Shelf, Includes 4 Pilaster Clips	1,2,3 Section Uprights
HS-5053	Industrial Strength Epoxy Coated Shelf, 3 each, Includes 12 Pilaster Clips	1,2,3 Section Uprights
HS-5054	Industrial Strength Stainless Steel Shelf, Includes 4 Pilaster Clips	1,2,3 Section Uprights
HS-3504	Industrial Strength Stainless Steel Center Shelf	2 Section Uprights
HS-3505	Industrial Strength Stainless Steel Center Shelf, 3 each	2 Section Uprights
HS-3509	Industrial Strength Epoxy Coated Shelf Center Shelf	2 Section Uprights
HS-3510	Industrial Strength Epoxy Coated Shelf Center Shelf, 3 each	2 Section Uprights
HS-3550	Pass-Thru Epoxy Shelf, 3 pack	1 & 2 Section Pass-Thrus
HS-3551	Pass-Thru Epoxy Shelf, 1 pack	1 & 2 Section Pass-Thrus
HS-3552	Pass-Thru Stainless Steel Shelf, 3 Pack	1 & 2 Section Pass-Thrus
HS-3553	Pass-Thru Stainless Steel Shelf, 1 Pack	1 & 2 Section Pass-Thrus
HS-5388	Industrial Strength Epoxy Coated Shelf Center Shelf, 1 each	3 Section Uprights
HS-5389	Industrial Strength Epoxy Coated Shelf Center Shelf, 3 each	3 Section Uprights
HS-5057	Tempered Glass Shelves, 3 each	For use with HR24C-G
HS-5058	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 27" and 72" Undercounters, Worktops and Preps
HS-5235	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 36" Undercounters, Worktops and Preps
HS-5059	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 48" Undercounters, Worktops and Preps
HS-5108	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 60" Undercounters, Worktops and Preps
HS-5116	Stainless Steel Shelf, Includes 4 Pilaster Clips	All 27" and 72" Undercounters, Worktops and Preps
HS-5117	Stainless Steel Shelf, Includes 4 Pilaster Clips	All 48" Undercounters, Worktops and Preps
HS-5118	Stainless Steel Shelf, Includes 4 Pilaster Clips	All 60" Undercounters, Worktops and Preps
HS-5151	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	PR67/93A
HS-5152	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	PR46B
HS-5153	Stainless Steel Shelf, Includes 4 Pilaster Clips	PR67/93A
HS-5154	Stainless Steel Shelf, Includes 4 Pilaster Clips	PR46B
HS-5169	Lower Stainless Steel Shelf, 4 Pilaster Clips	All 27" Undercounters, Worktops, and Preps
HS-5579	Additional epoxy shelf - 1 pk	PR60B



## SHELVES - CONTINUED

<b>HS-5580</b>	Stainless shelves - 1 pk	PR60B
<b>HS-5581</b>	Epoxy shelf, including 4 pilaster clips	Freezer Glass Door Merchandiser, Accessory Shelf w/clips
<b>HS-5592</b>	Standard wooden wine rack shelves	HR-15
<b>HS-5593</b>	Small wooden wine rack shelves	HR-24
<b>HS-5594</b>	Large wooden wine rack shelves	HR-24
<b>HS-5595</b>	Complete wine shelf set for HR-15 (set of 4 wood shelves with 4 slidina rails)	HR-15
<b>HS-5596</b>	Complete wine shelf set for HR-24 (set of 5 wood)	HR-24
<b>HS-5658</b>	Narrow Unit Shelves (Epoxy, 1 pack)	FSN models
<b>HS-5679</b>	Narrow Unit Shelves (SS, 1 pack)	FSN models
<b>HS-5680</b>	Narrow Unit Shelves (SS, 3 pack)	FSN models

## OVERSHELVES

Model Number	Description	For Use With
<b>HS-5172</b>	Single Overshelf for 27" Cabinet	27" Undercounters, Worktops, Sandwich Preps & Mega Top
<b>HS-5237</b>	Single Overshelf for 36" Cabinet	36" Undercounters, Worktops, Sandwich Preps & Mega Top
<b>HS-5229<sup>†</sup></b>	Single Overshelf for 46" / 93" Pizza Cabinet	46" / 93" Pizza Preps - cabinets can accommodate (2) HS-5229 Single Overshelves or (2) HS-5228 Double Overshelves.
<b>HS-5173</b>	Single Overshelf for 48" Cabinet	48" Undercounters, Worktops, Sandwich Preps & Mega Top
<b>HS-5174</b>	Single Overshelf for 60" Cabinet	60" Undercounters, Worktops, Sandwich Preps & Mega Top
<b>HS-5639</b>	Single Overshelf for 60" Pizza Cabinet	60" Pizza Cabinet
<b>HS-5231<sup>†</sup></b>	Single Overshelf for 67" Pizza Cabinet	67" Pizza Cabinet
<b>HS-5175</b>	Single Overshelf for 72" Cabinet	72" Undercounters, Worktops, Sandwich Preps & Mega Top
<b>HS-5163</b>	Double Overshelf for 27" Cabinet	27" Undercounters, Worktops, Sandwich Preps & Mega Top
<b>HS-5236</b>	Double Overshelf for 36" Cabinet	36" Undercounters, Worktops, Sandwich Preps & Mega Top
<b>HS-5228<sup>†</sup></b>	Double Overshelf for 46" / 93" Cabinet	46" / 93" Pizza Prep Preps 93" cabinets can accommodate (2) HS-5229 Single Overshelves
<b>HS-5164</b>	Double Overshelf for 48" Cabinet	48" Undercounters, Worktops, Sandwich Preps & Mega Top
<b>HS-5165<sup>†</sup></b>	Double Overshelf for 60" Cabinet	60" Undercounters, Worktops, Sandwich Preps & Mega Top
<b>HS-5640</b>	Double Overshelf for 60" Cabinet	60" Pizza Preps
<b>HS-5230<sup>†</sup></b>	Double Overshelf for 67" Cabinet	67" Pizza Preps
<b>HS-5166<sup>†</sup></b>	Double Overshelf for 72" Cabinet	72" Undercounters, Worktops, Sandwich Preps & Mega Top

<sup>†</sup>Compatible with models manufactured since March 2016. (Serial # FXXXXXC and after) / <sup>†</sup>Compatible with models manufactured since January 2017. (Serial # GXXXXXA and after) / \* 93" cabinets can accommodate (2) HS-5229 Single Overshelves or (2) HS-5228 Double Overshelves.

## TRAY / PAN SLIDES

**(16) Sets on 3" Centers per section is the recommended maximum capacity for Uprights. Units can hold as many as (24) sets on 2" Centers per section.**

Model Number	Description	For Use With
<b>HS-3557</b>	Stainless Steel Bottom Support Universal Pan Slides (1 Set), Includes 4 Pilaster Clips	Steelheart models
<b>HS-3558</b>	Stainless Steel Bottom Support Universal Pan Slides (4 Sets), Includes 16 Pilaster Clips	Steelheart models
<b>HS-5081</b>	Stainless Steel Bottom Support Universal Pan Slides (3 Sets), Includes 16 Pilaster Clips	Steelheart models
<b>HS-5092</b>	Stainless Steel Bottom Support Wire Tray Slides (1 Set) for 18x26 Baker Pan Only, Includes 4 Pilaster Clips	Steelheart models
<b>HS-5093</b>	Stainless Steel Bottom Support Wire Tray Slides (4 Sets) for 18x26 Baker Pan Only, Includes 16 Pilaster Clips	Steelheart models

## PIZZ PREP TABLES - PAN SLIDES

Model Number	Description
<b>HS-5514</b>	Removable Tray Pan Rack For Pizza Preps- Accommodates (6) 18" x 26" Sheet Pans With 3" Spacing

## FLAT LIFT OFF COVERS

Model Number	Description	For Use With
<b>HS-5070</b>	Flat Lift-Off Stainless Steel Cover - 12 pan Mega Top opening	SR27B-12M, SR48B-12M, SR60B-12M, *SR60B-24M, *SR72B-24M, SR27B-12MD, *SR60B-24MD4 (*2 of each cover required per model)
<b>HS-5279</b>	Flat Lift-Off Stainless Steel Cover - 15 pan Mega Top opening	SR36B-15M
<b>HS-5071</b>	Flat Lift-Off Stainless Steel Cover - 18 pan Mega Top opening	SR48B-18M, SR60B-18M, SR72B-18M, SR48B-18MD4
<b>HS-5072</b>	Flat Lift-Off Stainless Steel Cover	SR27B-8, SR27B-8D
<b>HS-5073</b>	Flat Lift-Off Stainless Steel Cover	SR48B-8, SR60B-8
<b>HS-5278</b>	Flat Lift-Off Stainless Steel Cover - 10 pan Sandwich Top opening	SR36B-10
<b>HS-5074</b>	Flat Lift-Off Stainless Steel Cover - 12 pan Sandwich Top opening	SR48B-12, SR48B-12MD4, SR60B-12, SR72B-12
<b>HS-5106</b>	Flat Lift-Off Stainless Steel Cover	SR60B-16, SR72B-16
<b>HS-5107</b>	Flat Lift-Off Stainless Steel Cover	SR72B-18

HS-5070 + HS-5071	Flat Lift-Off Stainless Steel Cover - 12 pan Mega Top opening Flat Lift-Off Stainless Steel Cover - 18 pan Mega Top opening	SR72B-30M, SR72B-30MD6 (1 of each cover required per model)
-------------------	--	--

COMPOSITE CUTTING BOARDS

Model Number	Description	For Use With
HS-5202	Dual Rear Cutting Board	60" Sandwich and MegaTop Models
HS-5265	10" x 27" x 1/2" Composite Cutting Board	27" Sandwich Preps & Mega Top
HS-5266	10" x 36" x 1/2" Composite Cutting Board	36" Sandwich Preps & Mega Top
HS-5267	10" x 48" x 1/2" Composite Cutting Board	48" Sandwich Preps & Mega Top
HS-5268	10" x 60" x 1/2" Composite Cutting Board	60" Sandwich Preps & Mega Top
HS-5269	10" x 72" x 1/2" Composite Cutting Board	72" Sandwich Preps & Mega Top
HS-5270	19" x 46" x 1/2" Composite Cutting Board	46" Pizza Preps
HS-5271	19" x 67" x 1/2" Composite Cutting Board	67" Pizza Preps
HS-5272	19" x 93" x 1/2" Composite Cutting Board	93" Pizza Preps

GLASS DOOR MERCHANDISER ACCESSORIES

Model Number	Description	For Use With
HS-5446	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-10-HC
HS-5291	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-26-HC
HS-5293	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-45-SD-HC
HS-5295	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-49-HC
HS-5290	Price Tag Holder	RM-10-HC
HS-5292	Price Tag Holder	RM-26-HC
HS-5294	Price Tag Holder	RM-45-SD-HC
HS-5296	Price Tag Holder	RM-49-HC
HS-5447	Epoxy Shelf, Includes 4 Pilaster Clips	RM-10-HC
HS-5317	Epoxy Shelf, Includes 4 Pilaster Clips	RM-26-HC
HS-5318	Epoxy Shelf, Includes 4 Pilaster Clips	RM-45-SD-HC
HS-5319	Epoxy Shelf, Includes 4 Pilaster Clips	RM-49-HC
HS-5343	Epoxy Shelf, Includes 4 Pilaster Clips	RM-7-HC
HS-5344	Epoxy Floor Shelf	RM-7-HC
HS-5288	4" Casters-Set Of Four, Two With Brakes	RM-10-HC, RM-26-HC, RM-45-SD-HC, RM-49-HC
HS-5460	Flat Epoxy coated shelf, RM-65-HC Middle Section	RM-65-HC
HS-5461	Flat Epoxy coated shelf, RM-65-HC Right & Left Section	RM-65-HC
HS-5465	Organizer Shelf with Tracks, Middle Section	RM-65-HC
HS-5466	Organizer Shelf with Tracks, Right & Left Section	RM-65-HC

BACK BAR ACCESSORIES

Model Number	Description	For Use With
HS-5410	Complete Door Assembly-Solid, Right Hinge	All Back Bar and Direct Draw Models except DD24
HS-5411	Complete Door Assembly-Solid, Left Hinge	All Back Bar and Direct Draw Models except DD24, BB80, BB80-G, DD80
HS-5412	Complete Door Left Section Assembly-Solid, Left Hinge 80"	BB80, BB80-G, DD80
HS-5413	Complete Door Assembly-Glass, Right Hinge	All Back Bar and Direct Draw Models except DD24
HS-5414	Complete Door Assembly-Glass, Left Hinge	BB59, BB69, BB95, BB59-G,BB69-G, DD59, DD69, DD95
HS-5415	Complete Door Left Section Assembly-Glass, Left Hinge 80"	BB80, BB80-G, DD80
HS-5417	Flat Shelf, 59" & Right 80" Cabinets, 21.25" x 21.4", Includes 4 SS pilaster clips	BB59, BB59-G, DD59, (Right Section) BB80, BB80-G, DD80
HS-5418	Flat Shelf, 69" & 95" Cabinets, 26" x 21.4", Includes 4 SS pilaster clips	BB69, BB69-G, BB95, DD69, DD95, BB95-G
HS-5419	Flat Shelf Center, 80" Cabinets, 23.1" x 21.4", Includes 4 SS pilaster clips	(Center) BB80, BB80-G, DD80
HS-5420	Flat Shelf Left, 80" Cabinets, 18" x 21.4", Includes 4 SS pilaster clips	(Left Section) BB80, BB80-G, DD80
HS-5421	Set of 4 Pilasters 20.2"	All Back Bar and Direct Draw Models
HS-5515	Bottle Dividers for Back Bar Shelves, 6 Pack with 12 clips	BB59, BB69, BB80, BB95, BB59-G, BB69-G, BB80-G, BB95-G
HS-5662	4" Casters with Shims (6pk)	BB80, BB95, BB80-G, BB95-G, CC80, CC95, DD80, DD95
HS-5663	4" Casters with Shims (4pk)	BB59, BB69, BB59-G, BB69-G, CC50, CC65, DD59, DD69

ECONOMY SERIES

Model Number	Description	For Use With
HS-5511	Flat Shelf Economy Series 1 Section Uprights with clips	Refrigerator, Freezer
HS-5512	Flat Shelf Economy Series 2 Section Uprights with clips	Refrigerator, Freezer

MISCELLANEOUS ACCESSORIES

Model Number	Description	For Use With
HS-4007	Drawer Assembly Divider Bar (Accommodates 1/2, 1/3 and 1/6 Size Pans)	Undercounters, Worktops, Prep Tables, Equipment Stands

**MISCELLANEOUS ACCESSORIES - CONTINUED**

<b>HS-5534</b>	12" Rail Divider Bar	Prep Tables
<b>HS-5069</b>	Sandwich Top Rail Adapter Bar - 12.6" x 1.0" (front to back)	Sandwich Preps & Mega Top Prep Tables
<b>HS-5280</b>	Full Size Pan Adapter Bar for UR27B-8 Rail	Sandwich Preps
<b>HS-5281</b>	Full Size Pan Adapter Bar for SR36B-10 Rail	Sandwich Preps
<b>HS-5476</b>	Black kickplate for HR15A, HR15A-G	HR15A, HR15A-G
<b>HS-5112</b>	Stacking Kit - UR27B & UF27B	Undercounters
<b>HS-5184</b>	All Mega Top divider front to back	Mega Top Prep Tables
<b>HS-5185</b>	All Mega Top & Sandwich Prep 27-8 divider side to side (outer)	Sandwich Preps & Mega Top Prep Tables
<b>HS-5186</b>	Mega Top 18M & 30M divider side to side (center)	Mega Top Prep Tables
<b>HS-5187</b>	Sandwich Prep 27-8 divider front to back	Sandwich Preps Preps
<b>HS-5188</b>	Sandwich Prep 48-8 and 12, 16, 18 pan openings divider front to back	Sandwich Preps Preps
<b>HS-5189</b>	Sandwich Prep 48-8 and 12, 16, 18 pan openings side to side (outer)	Sandwich Preps Preps
<b>HS-5190</b>	Sandwich Prep 12 & 16 pan openings side to side (center)	Sandwich Preps Preps
<b>HS-5191</b>	Sandwich Prep 18 pan openings side to side (outer)	Sandwich Preps Preps
<b>HS-5192</b>	Sandwich Prep 18 pan openings side to side (center)	Sandwich Preps Preps
<b>HS-5453</b>	Heated Condensate Pan Kit	≥46" Undercounter, Worktop and Preps
<b>HS-5462</b>	Heated Condensate Pan	Steelheart® Uprights
<b>HS-5526</b>	Stainless Steel Rear Panel for 1 Section Upright, (factory installed only)	Steelheart® Uprights
<b>HS-5525</b>	Stainless Steel Rear Panel for 2 Section Upright, (factory installed only)	Steelheart® Uprights
<b>HS-5496</b>	Stainless Steel Rear Panel for DT1A (factory installed only)	Steelheart® Uprights
<b>HS-5497</b>	Stainless Steel Rear Panel for DT2A (factory installed only)	Steelheart® Uprights
<b>HS-5449</b>	14" cutting board brackets	SR48, 60 A-Series
<b>HS-5530</b>	Stacking Kit (Need 2 for stacked 3 high)	IM-500
<b>HS-5585</b>	14" cutting boards Brackets	SR48B & SR60B Models
<b>HS-5601</b>	Dual Rear Cutting board	SR60B-18M
<b>HS-5626</b>	Stainless Steel Panel Overlay Kit	48" B Series Refrigerator and Freezers, Undercounter, Worktop, Sandwich Preps, Mega Top Prep Models - FACTORY INSTALLED
<b>HS-5620</b>	Stainless Steel Panel Overlay Kit	27" B Series Refrigerator Undercounter, Worktop, Sandwich Preps, Mega Top Prep Models - FACTORY INSTALLED
<b>HS-5621</b>	Stainless Steel Panel Overlay Kit	UR27B-GLP01 Refrigerator Undercounter - FACTORY INSTALLED
<b>HS-5622</b>	Stainless Steel Panel Overlay Kit	27" B Series Freezer Undercounter and Worktop Models - FACTORY INSTALLED
<b>HS-5624</b>	Stainless Steel Panel Overlay Kit	UF27B-GLP01 Freezer Undercounter - FACTORY INSTALLED
<b>HS-5625</b>	Stainless Steel Panel Overlay Kit	36" B Series Undercounter and Worktop Refrigerator Models - FACTORY INSTALLED
<b>HS-5627</b>	Stainless Steel Panel Overlay Kit	UR48B-GLP01 Refrigerator Undercounter - FACTORY INSTALLED
<b>HS-5628</b>	Stainless Steel Panel Overlay Kit	72" B Series Refrigerator Undercounter, Worktop, Sandwich Preps, Mega Top Prep Models - FACTORY INSTALLED
<b>HS-5630</b>	Stainless Steel Panel Overlay Kit	60" B Series Refrigerator and Freezer Undercounter, Worktop, Sandwich Preps, Mega Top Prep Models - FACTORY INSTALLED
<b>HS-5611</b>	Stainless Steel Panel Overlay Kit	60" B Series Undercounter, Worktop, Sandwich Preps, Mega Top Prep Models - FACTORY INSTALLED
<b>HS-5651</b>	Rail Dividers for 1/6 size pans	PR46B
<b>HS-5652</b>	Rail Dividers for 1/6 size pans	PR60B
<b>HS-5653</b>	Rail Dividers for 1/6 size pans	PR67B
<b>HS-5654</b>	Rail Dividers for 1/6 size pans	PR93B
<b>HS-5692</b>	Drawer Dividers	PR60B
<b>HS-5693</b>	Drawer Dividers	PR46B, PR67B, PR93B
<b>HS-5518</b>	Narrow Dividers for Rubbermaid Pans	SR27B-8, SR27B-D2, SR48B-8, SR60B-8 models
<b>HS-5519</b>	Narrow Dividers for Rubbermaid Pans	SR27B-12M, SR27B-12MD2, SR48B-12, SR48B-12M, SR48B-12D2, SR48B-12D4, SR60B-12, SR60B-12M, SR72B-12, SR72B-12M models
<b>HS-5521</b>	Narrow Dividers for Rubbermaid Pans	SR60B-16, SR72B-16 models
<b>HS-5522</b>	Narrow Dividers for Rubermaid Pans	SR72B-18, SR60B-18M, SR72B-18M, SR48B-18MD4
<b>HS-5655</b>	Epoxy-Coated Wine Shelf	Steelheart® Single Section (1 pk)
<b>HS-5656</b>	Stainless Steel Wine Shelf	Steelheart® Single Section (1 pk)



**HOSHIZAKI. BEYOND STRONG.**

**HOSHIZAKI AMERICA, INC.**

618 Hwy. 74, South, Peachtree City, GA 30269

TEL 800-438-6087 | FAX 800-345-1325

[hoshizakiamerica.com](http://hoshizakiamerica.com)

